


Level (100:1798 Hz) = 94.24 dB SPL/watt (8 ohms, @1.50 meters)

18TBW100

MLSSA: Frequency Domain

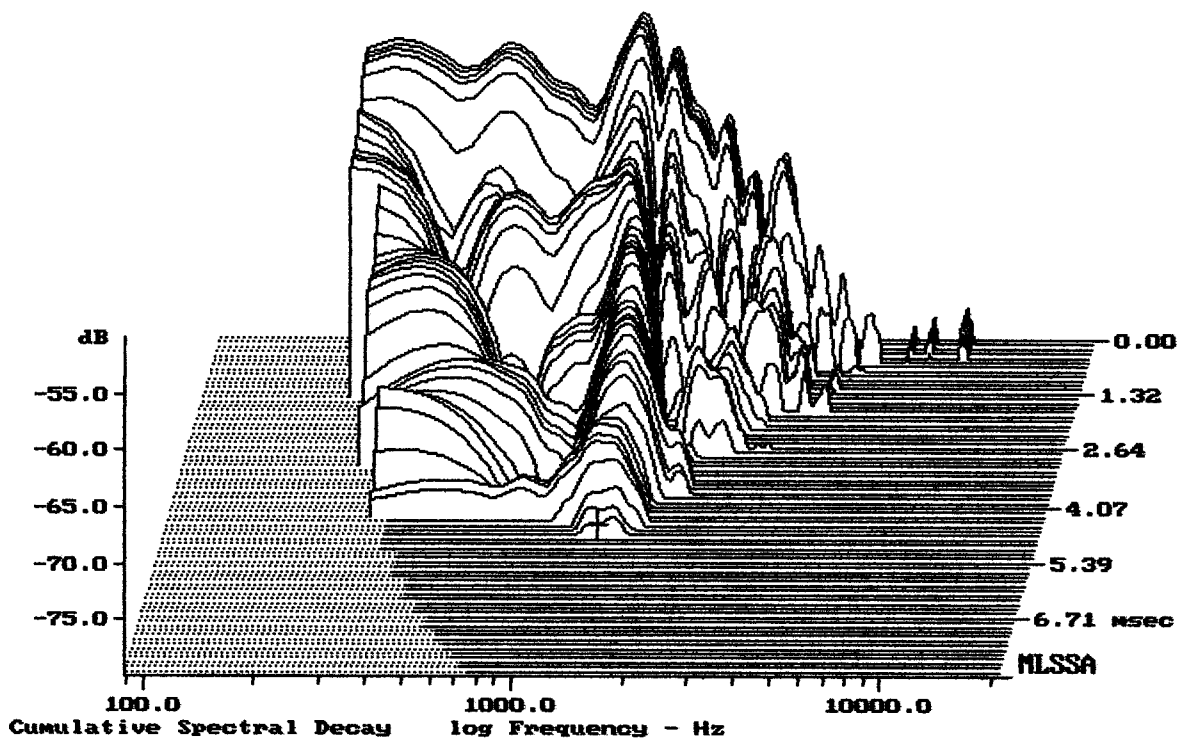

-79.01 dB, 1332 Hz (30), 4.730 msec (44)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.86	Ohms
2	Fs	39.44	Hz
3	Re	5.38	Ohms[dc]
4	Res	113.41	Ohms
5	Qms	9.56	
6	Qes	0.45	
7	Qts	0.43	
8	L1	1.61	mH
9	L2	2.07	mH
10	R2	10.11	Ohms
11	RMSE-load	0.70	Ohms
12	Vas(Sd)	134.09	liters
13	Mms	243.37	grams
14	Cms	67	$\mu\text{M}/\text{Newton}$
15	B1	26.75	Tesla-M
16	SPLref(Sd)	94.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1194.59 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.8% (-20% to -50% is recommended).

18TBW100

MLSSA: Parameters

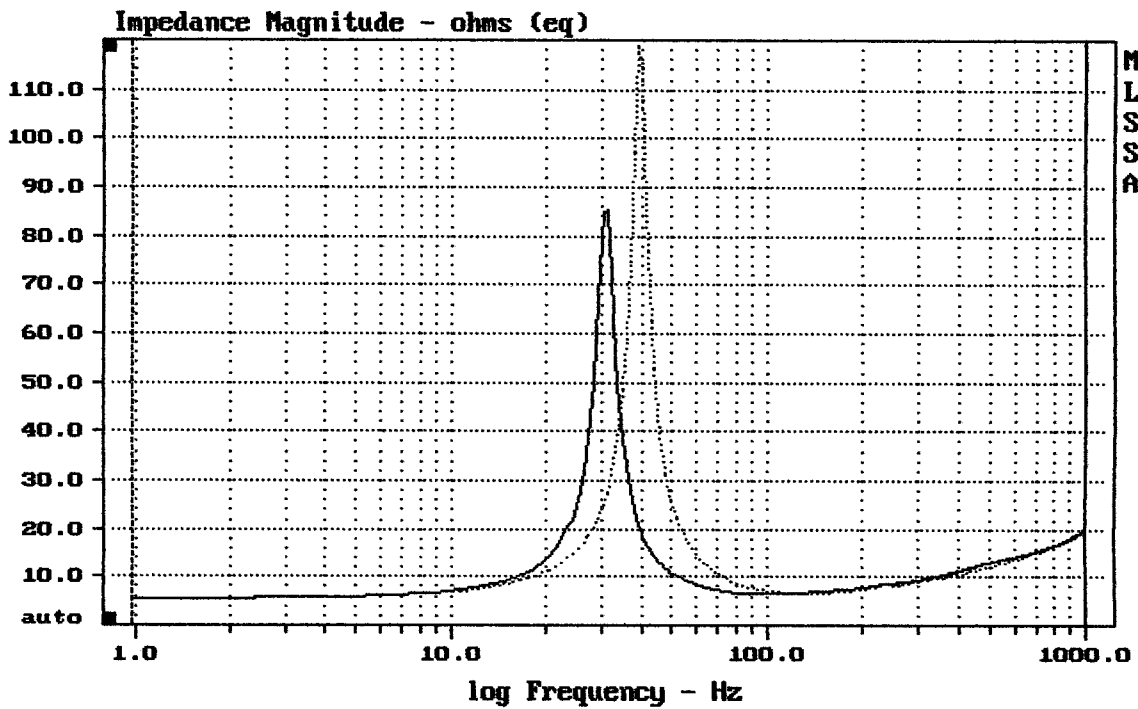

mean: 13.51, rms: 15.88, std: 8.334, max: 118.8, min: 5.481

DTTO

MLSSA: Frequency Domain