


mean: 91.86, rms: 92.27, std: 2.40, max: 96.94, min: 81.84

DLNB


MLSSA: Frequency Domain

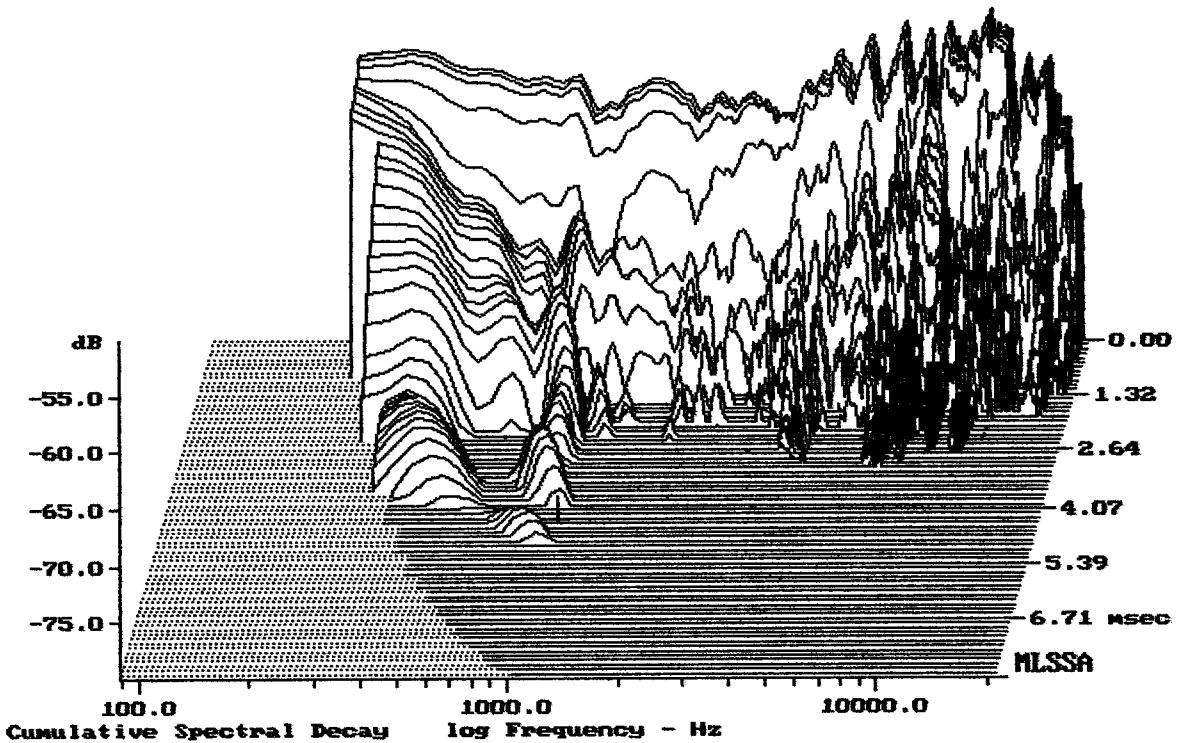

-80.00 dB, 1021 Hz (23), 4.070 msec (38)

DTTO

Step Response - volts

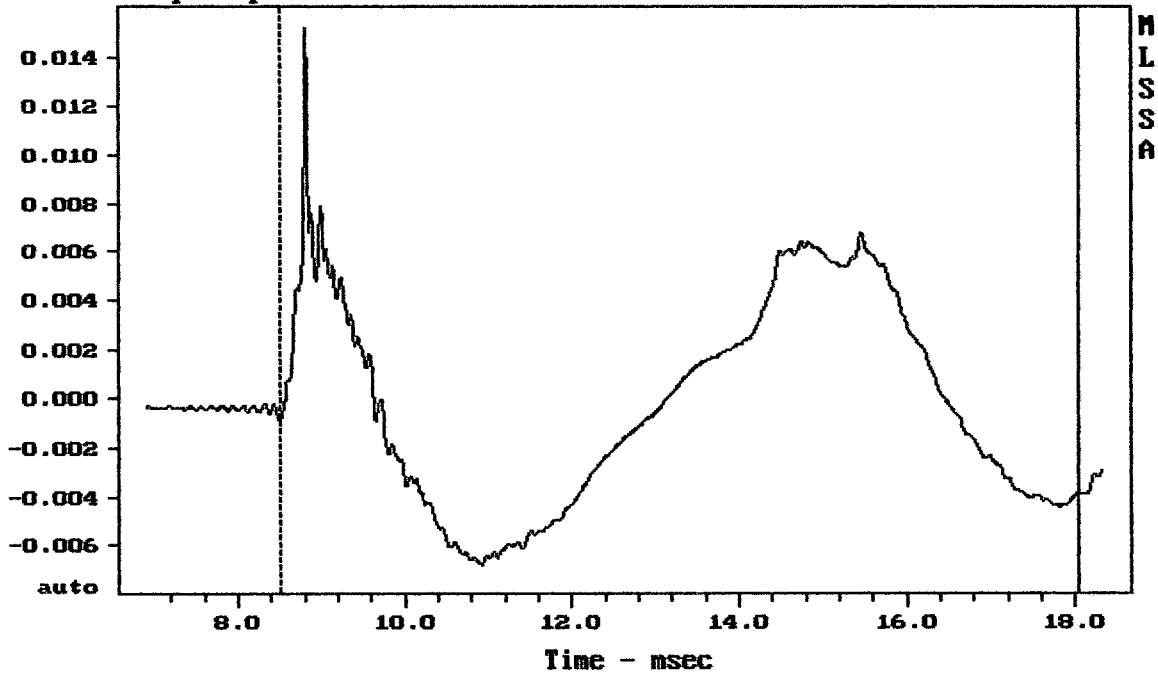


mean: -0.0001893, rms: 0.00424, std: 0.004236, max: 0.01513, min: -0.006795

DLMB

MLSSA: Time Domain


Sensitivity Magnitude - dB SPL/watt (4 ohms, @1.65 meters)

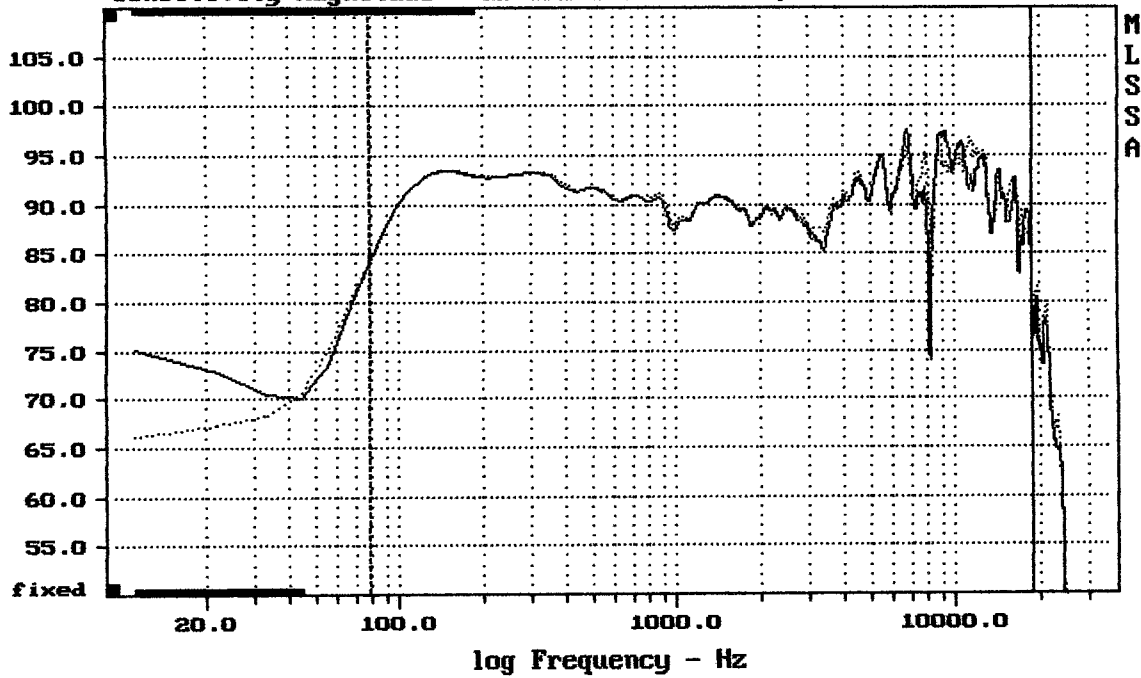

Overlay Compare: dev= +4.1/-14, std= 1.9, avg= -0.38

DLMB


MLSSA: Frequency Domain

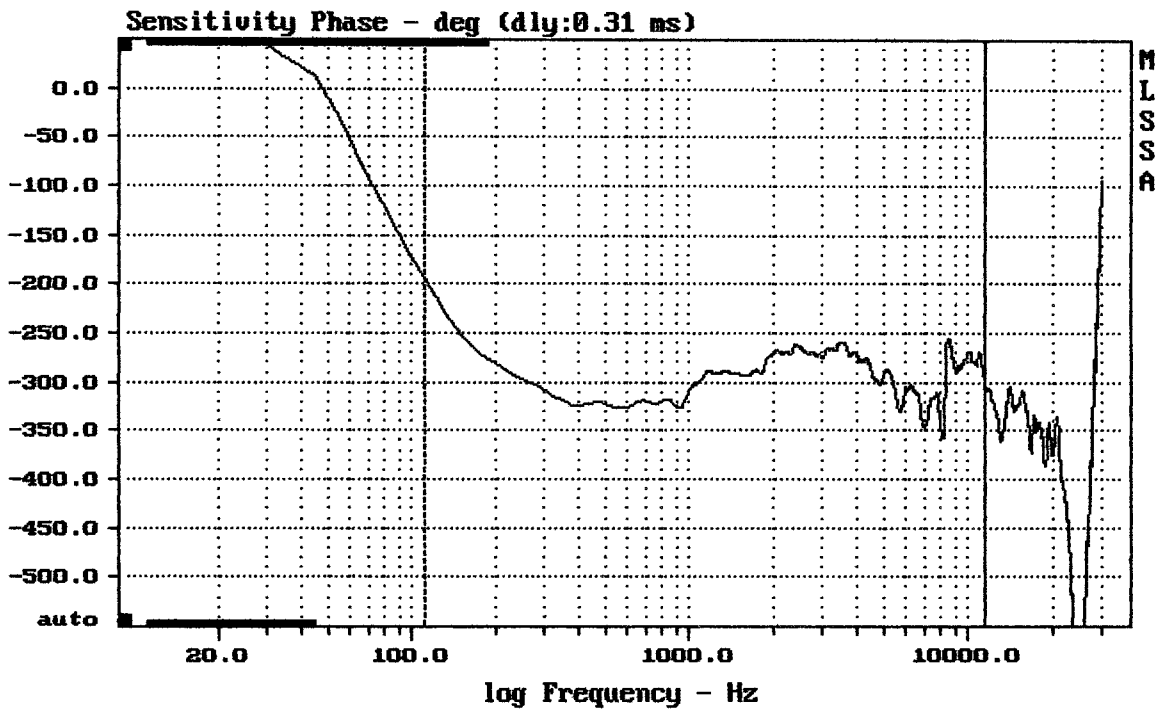

mean: -292.4, rms: 293.4, std: 24.12, max: -194.4, min: -357.2

DLMB

MLSSA: Frequency Domain

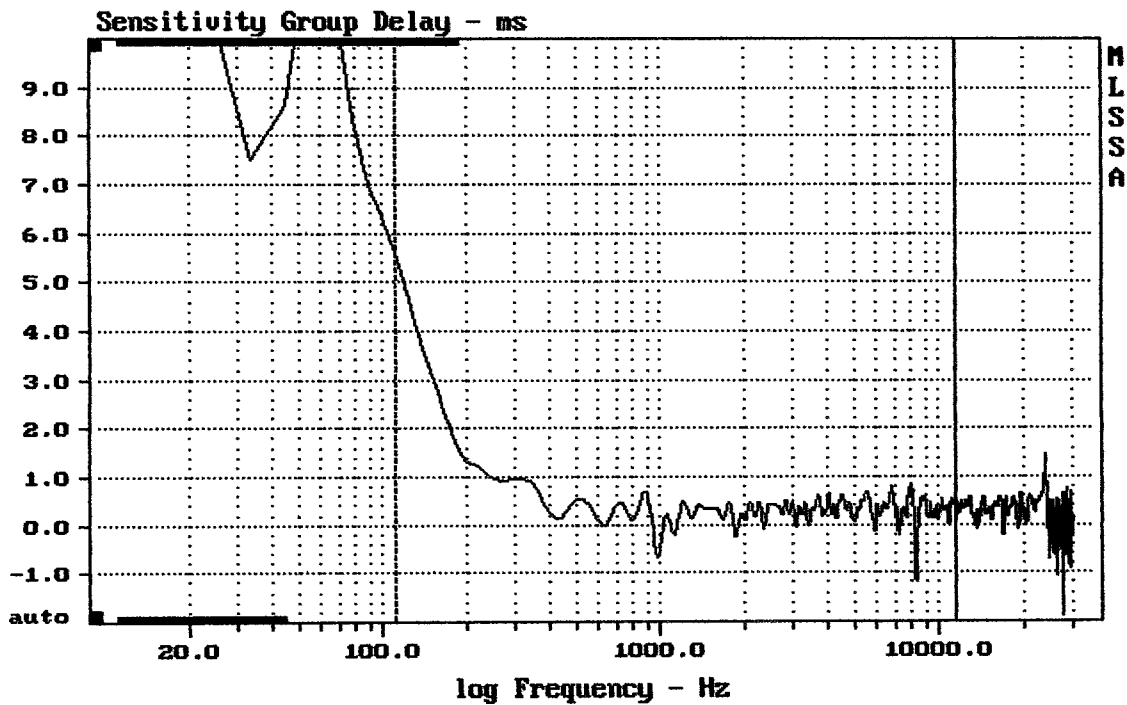


mean: 0.3363, rms: 0.519, std: 0.3953, max: 5.603, min: -1.2

DLMB

MLSSA: Frequency Domain

Sensitivity Mag - dB SPL/watt (4 ohms, @1.65 meters) (0.33 oct)

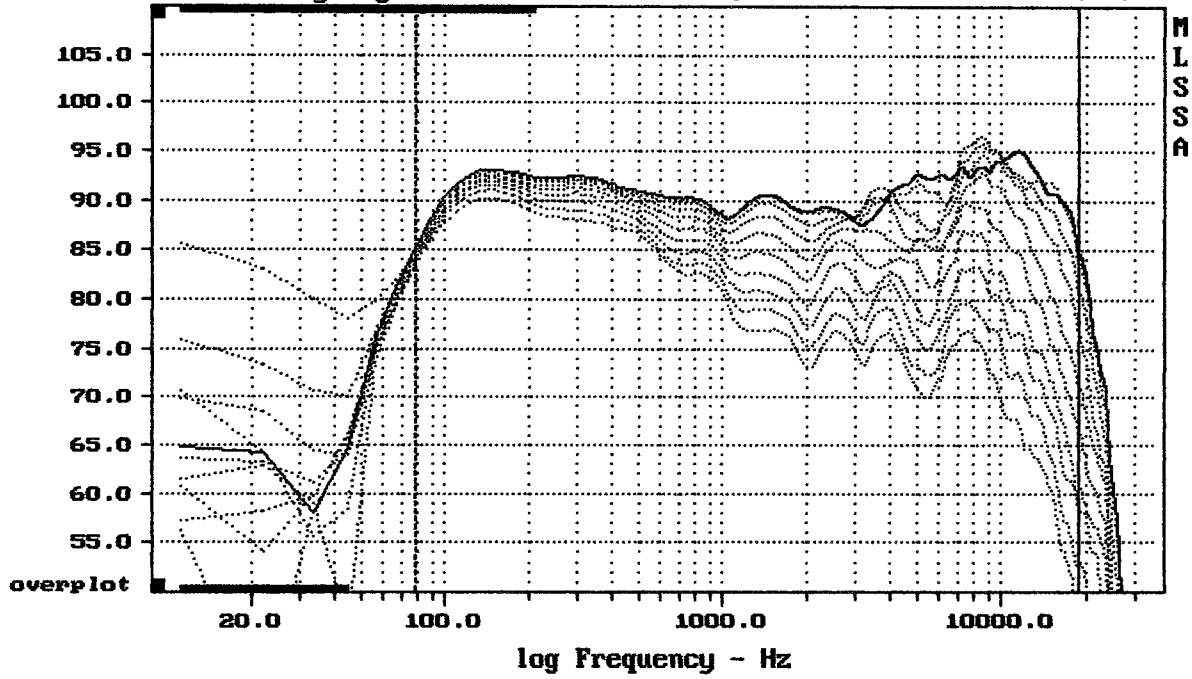


Overlay Compare: dev= +23/-14, std= 8.8, avg= -23

DLMB

MLSSA: Frequency Domain


Sensitivity Mag - dB SPL/watt (4 ohms, @1.65 meters) (0.33 oct)

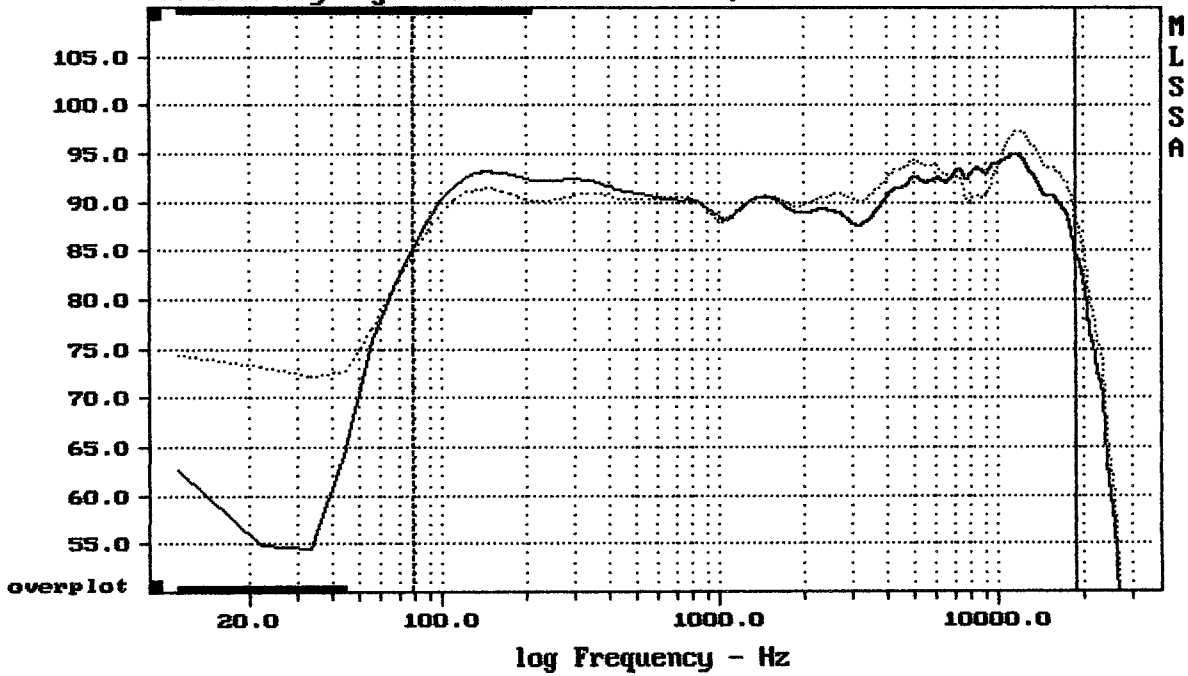

Overlay Compare: dev= +2/-4.3, std= 1.9, avg= 1.4

DJ


MLSSA: Frequency Domain

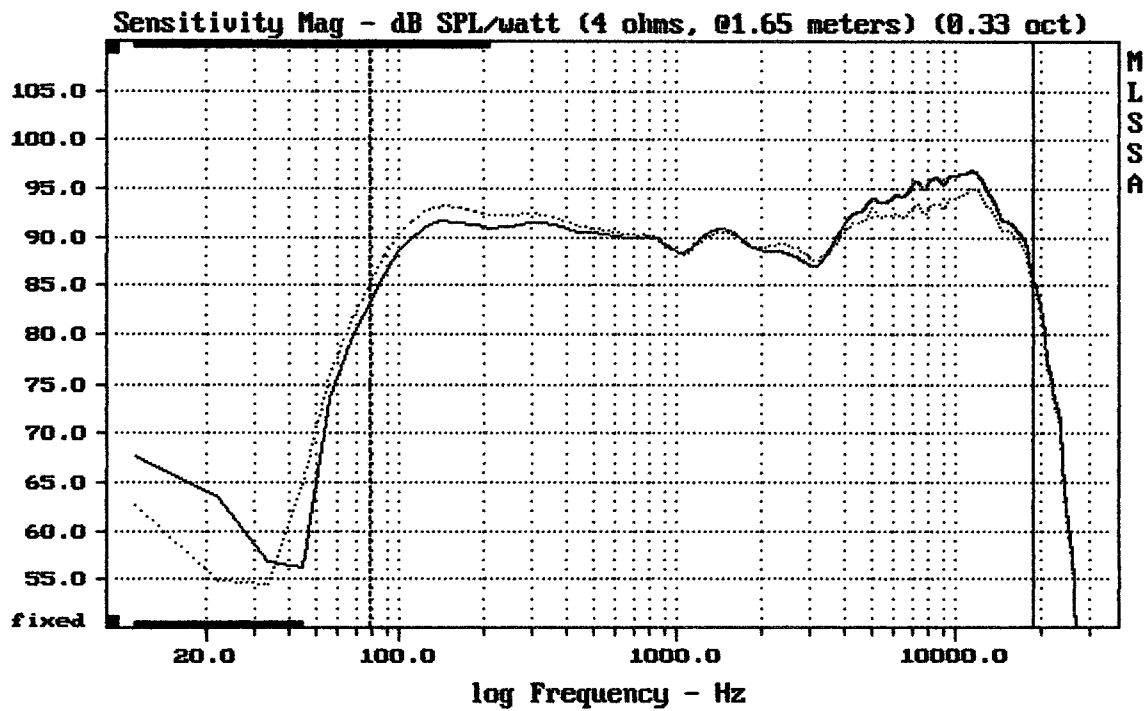

Overlay Compare: dev= +1.4/-3.1, std= 0.96, avg= 1.2

SOLOIST _____


MLSSA: Frequency Domain

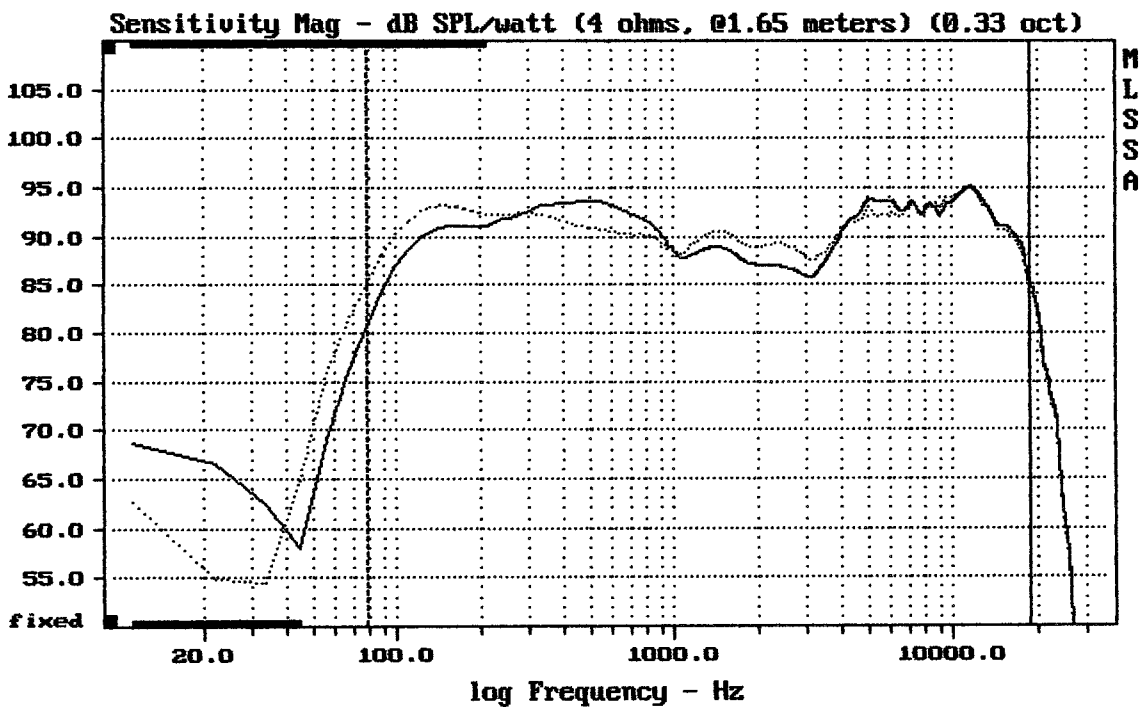

Overlay Compare: dev= +2.8/-4.3, std= 0.94, avg= -0.0056

MONITOR _____


MLSSA: Frequency Domain

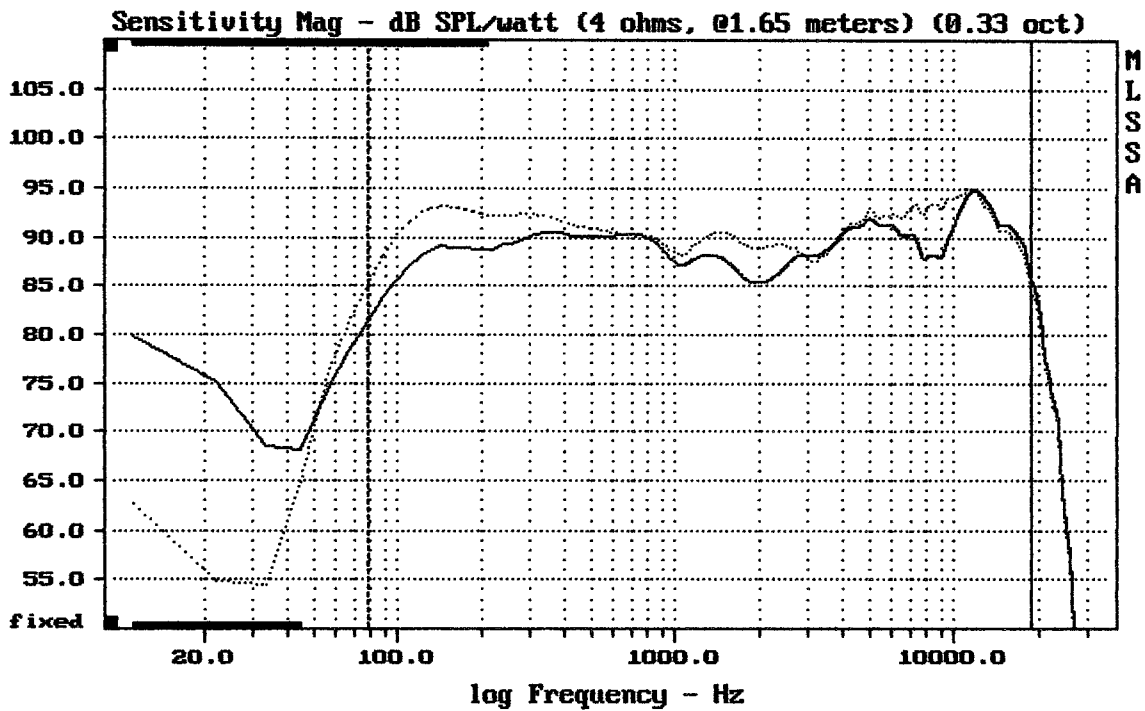

Overlay Compare: dev= +2/-4.3, std= 1.9, avg= -1

EQ K _____


MLSSA: Frequency Domain

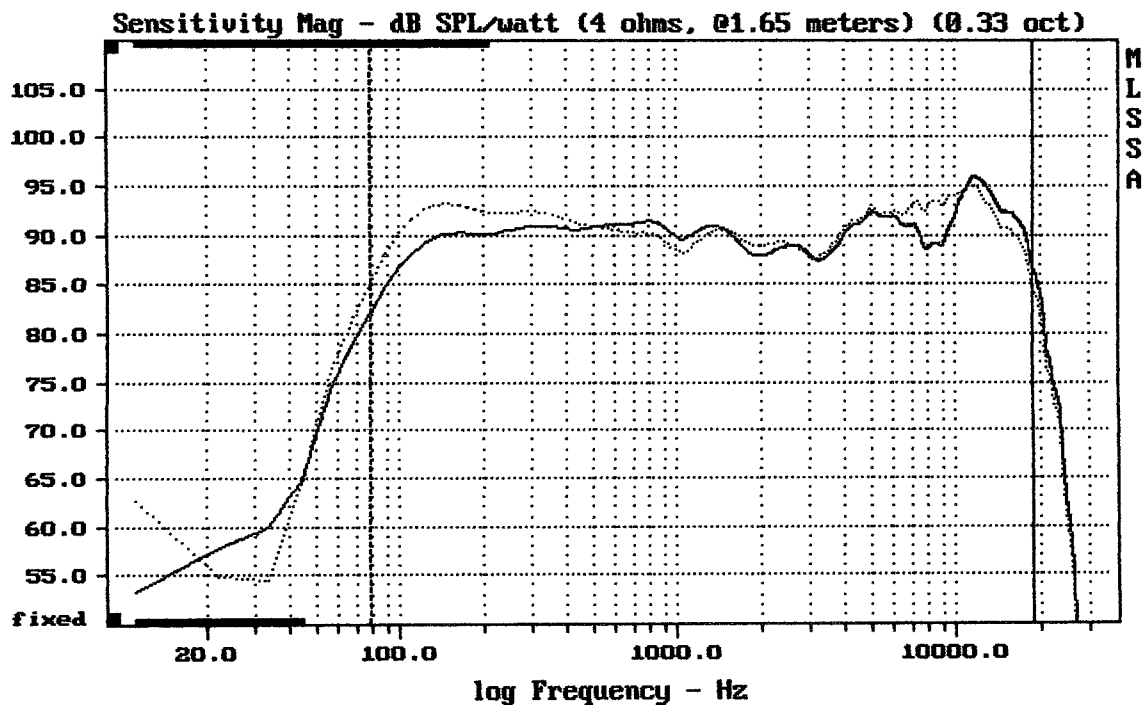

Overlay Compare: dev= +2/-4.4, std= 1.9, avg= -0.06

EQ Y _____


MLSSA: Frequency Domain

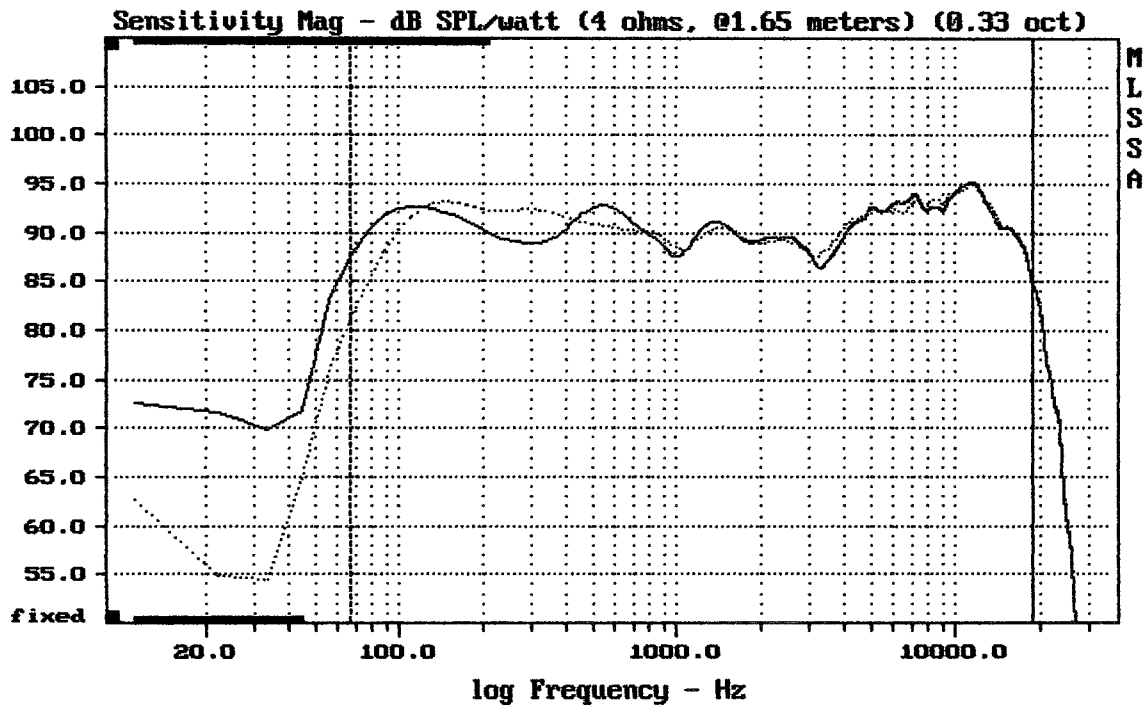

Overlay Compare: dev= +6.5/-3.4, std= 0.62, avg= -0.13

DLMB STAGE MONITOR EQ PA _____

MLSSA: Frequency Domain

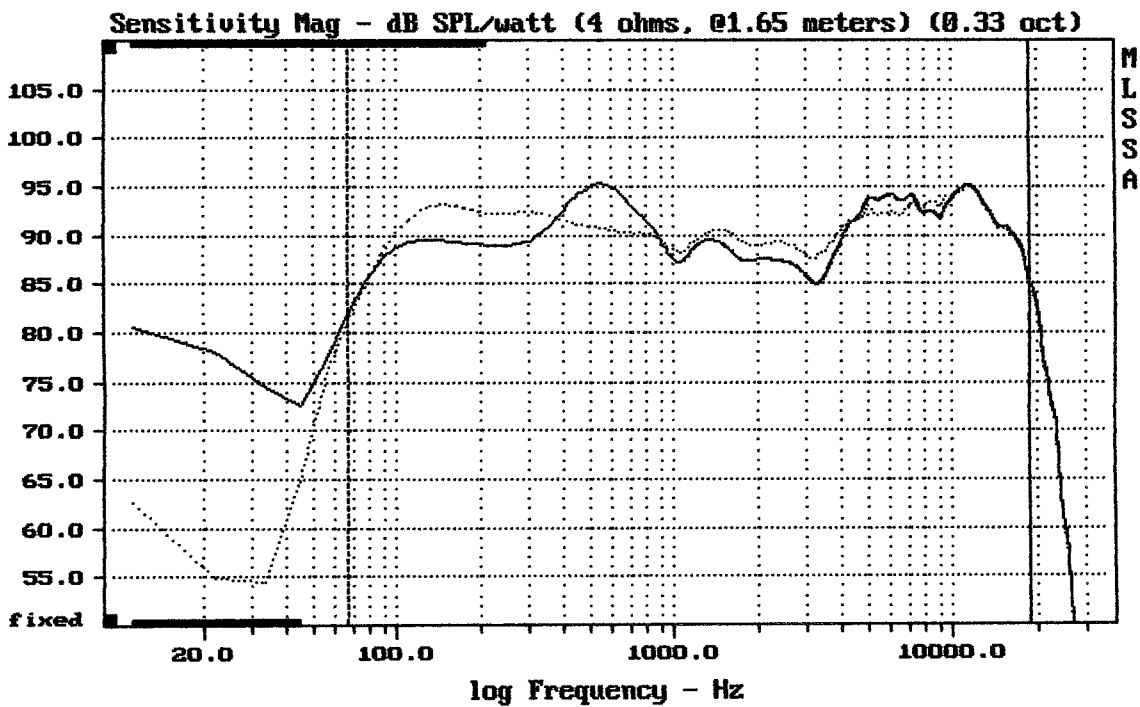


Overlay Compare: dev= +4.7/-3.6, std= 1.1, avg= -0.1

DTTO EQ MONITOR _____

MLSSA: Frequency Domain


Impulse Response - volts

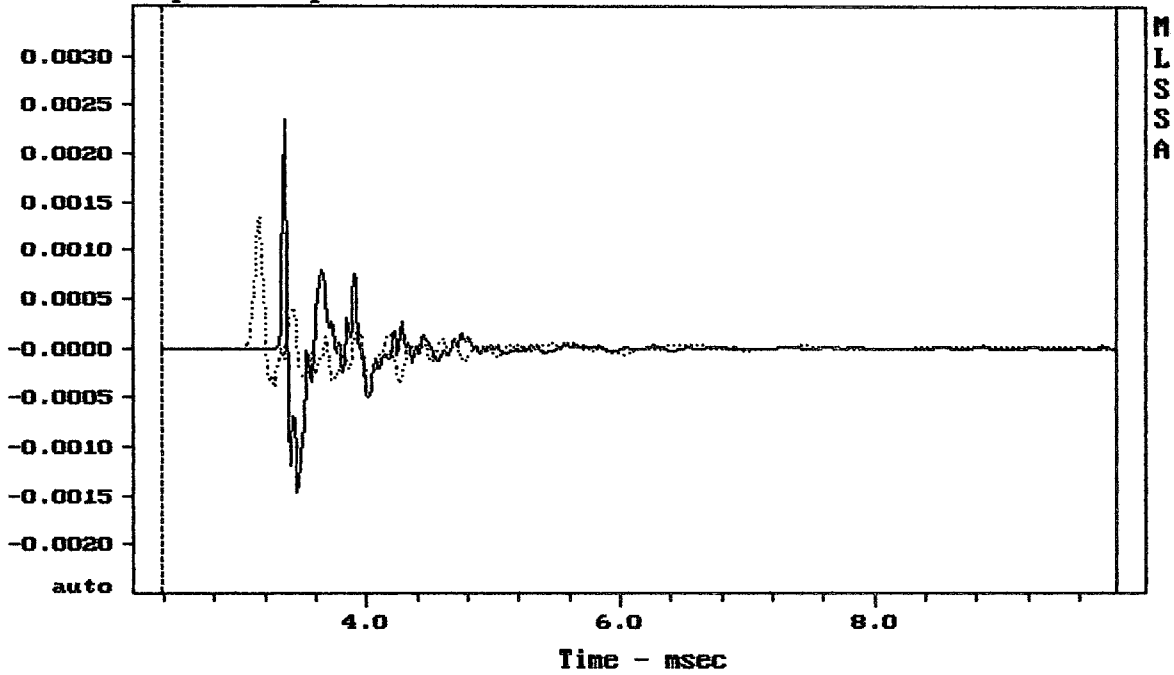

CURSOR: $dy = 7.48585e-006$ $x = 9.8890$ (899)

T5840A


MLSSA: Time Domain

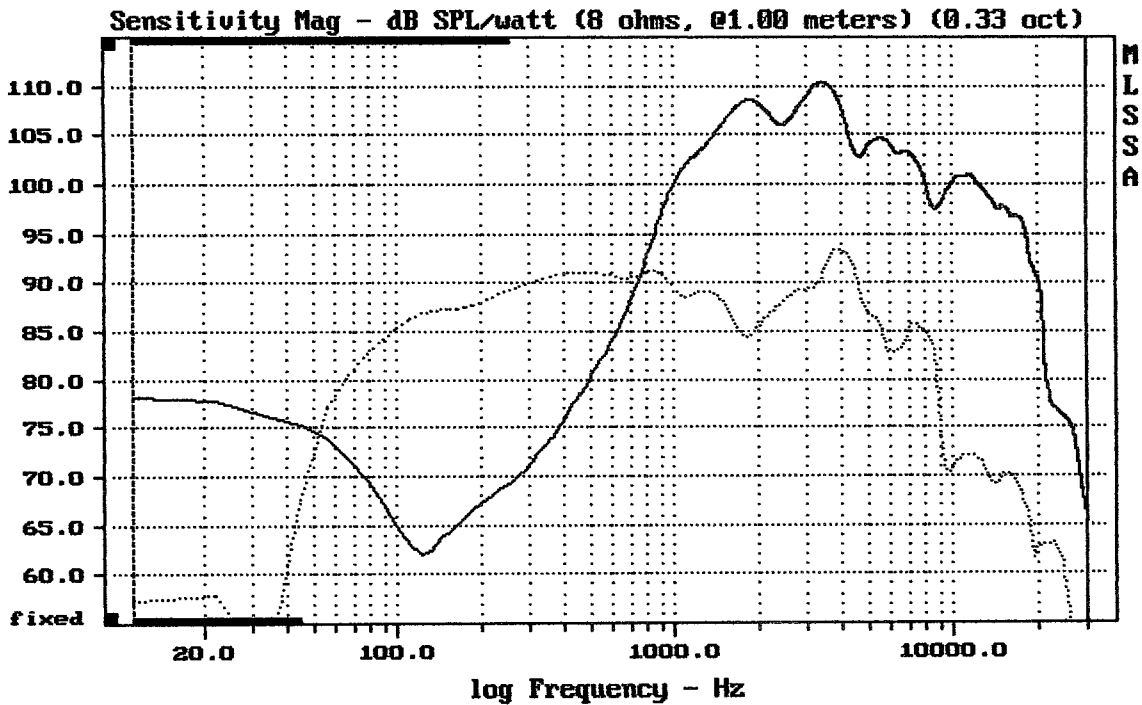

CURSOR: $dy = -25.2099$ $x = 30007.1014$ (2704)

T5840A


MLSSA: Frequency Domain

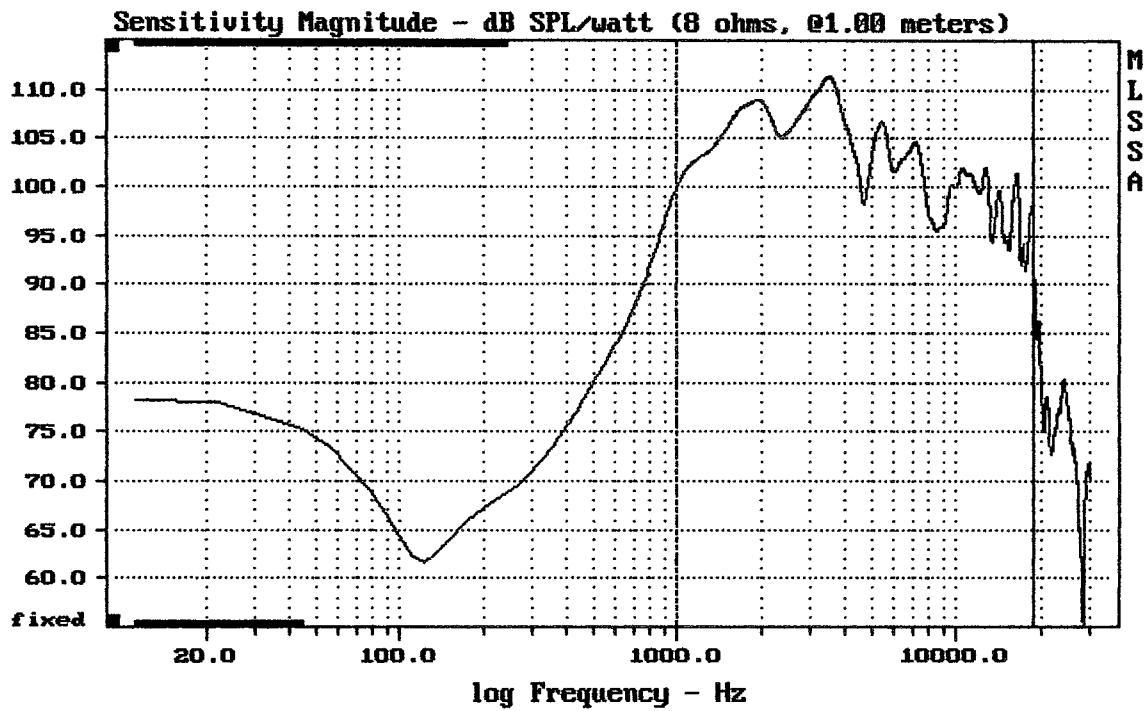

Level (999:18999 Hz) = 105.26 dB SPL/watt (8 ohms, @1.00 meters)


T5840A

MLSSA: Frequency Domain

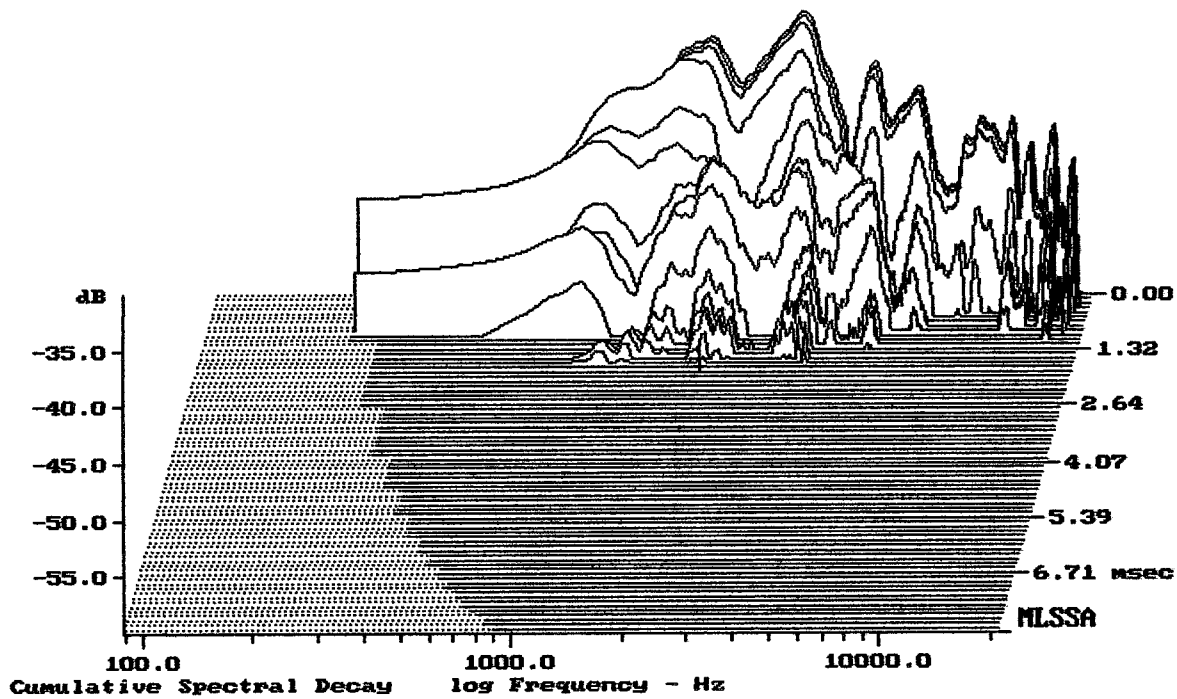

-59.68 dB, 2042 Hz (46), 1.650 msec (16)


DTTO

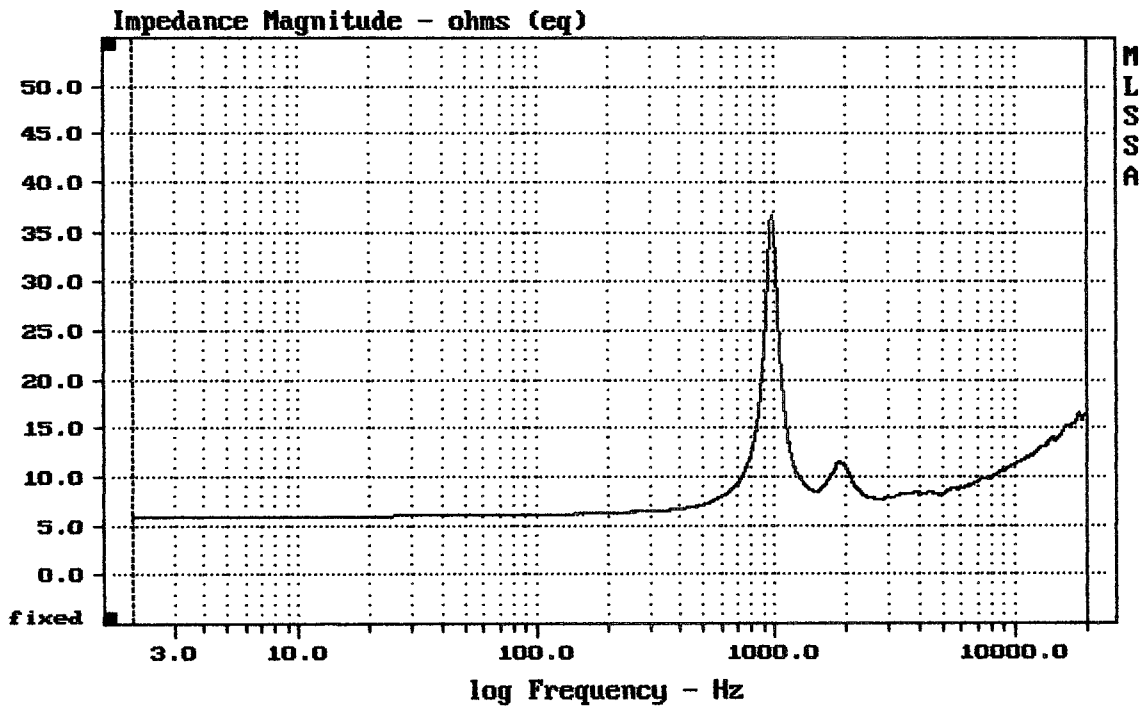

mean: 11.86, rms: 12.32, std: 3.354, max: 36.71, min: 5.881

T5840A


MLSSA: Frequency Domain

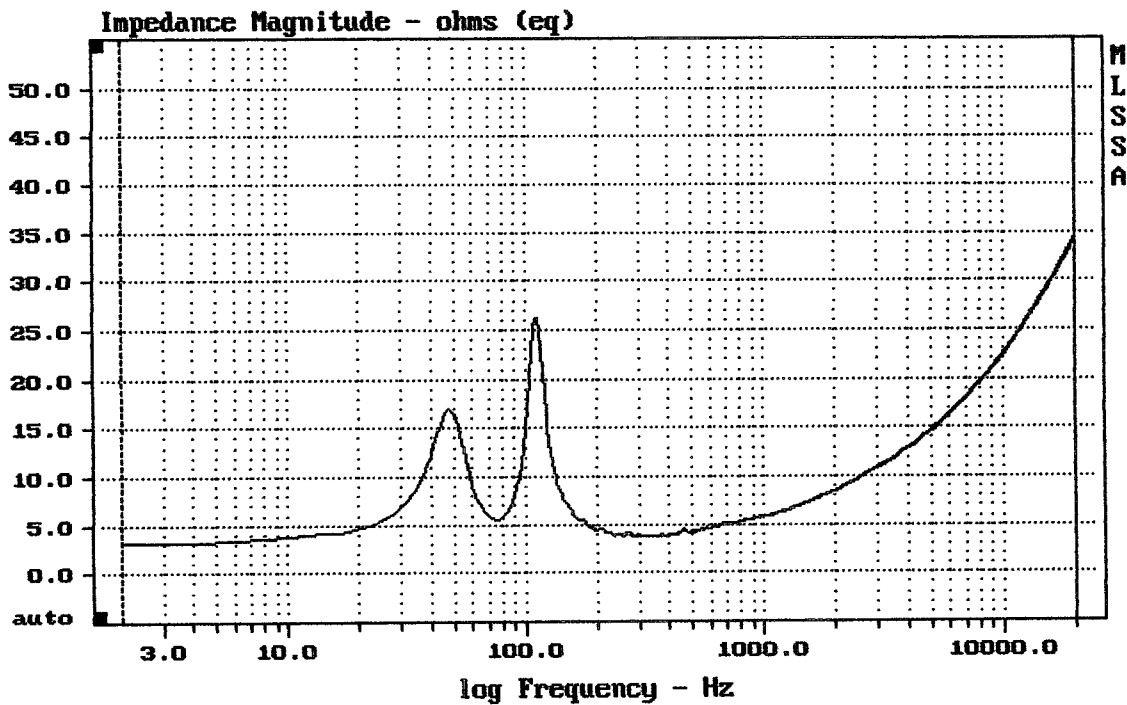

mean: 21.48, rms: 23.12, std: 8.566, max: 35.02, min: 3.094

T5840A


MLSSA: Frequency Domain

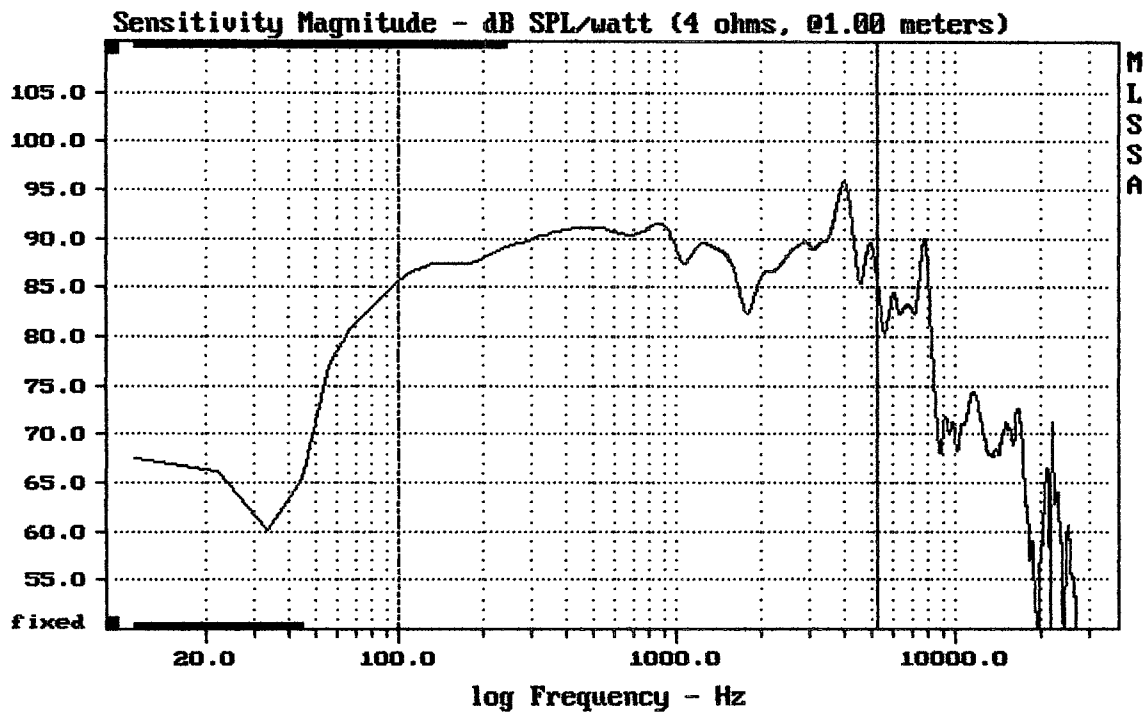

Level (100:5249 Hz) = 89.49 dB SPL/watt (4 ohms, @1.00 meters)

T5840A

MLSSA: Frequency Domain

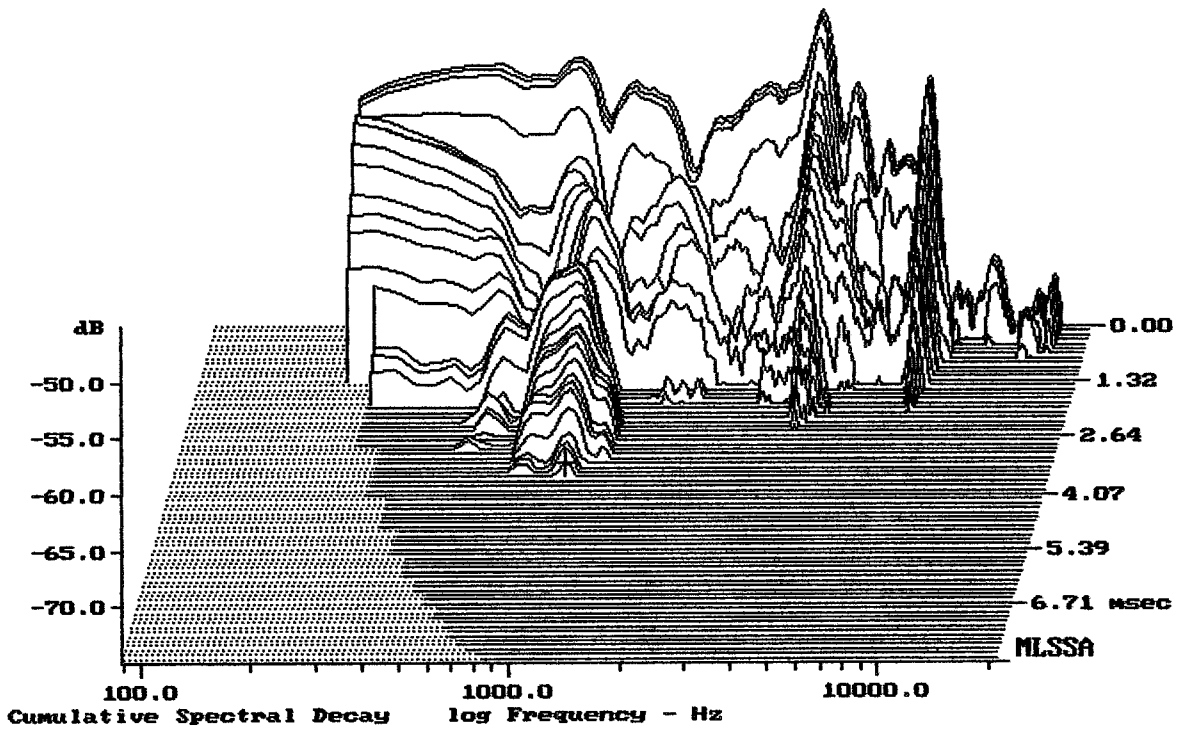

-73.81 dB, 1821 Hz (23), 3.630 msec (34)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.34	Ohms
2	Fs	72.70	Hz
3	Re	2.92	Ohms[dc]
4	Res	36.84	Ohms
5	Qms	4.26	
6	Qes	0.34	
7	Qts	0.31	
8	L1	0.38	mH
9	L2	0.65	mH
10	R2	2.77	Ohms
11	RMSE-load	0.88	Ohms
12	Vas(Sd)	20.20	liters
13	Mms	13.47	grams
14	Cms	356	$\mu\text{M}/\text{Newton}$
15	B1	7.29	Tesla-M
16	SPLref(Sd)	95.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 201.06 sq cm


DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -40.3% (-20% to -50% is recommended).

T5840A FROM DLM8

MLSSA: Parameters

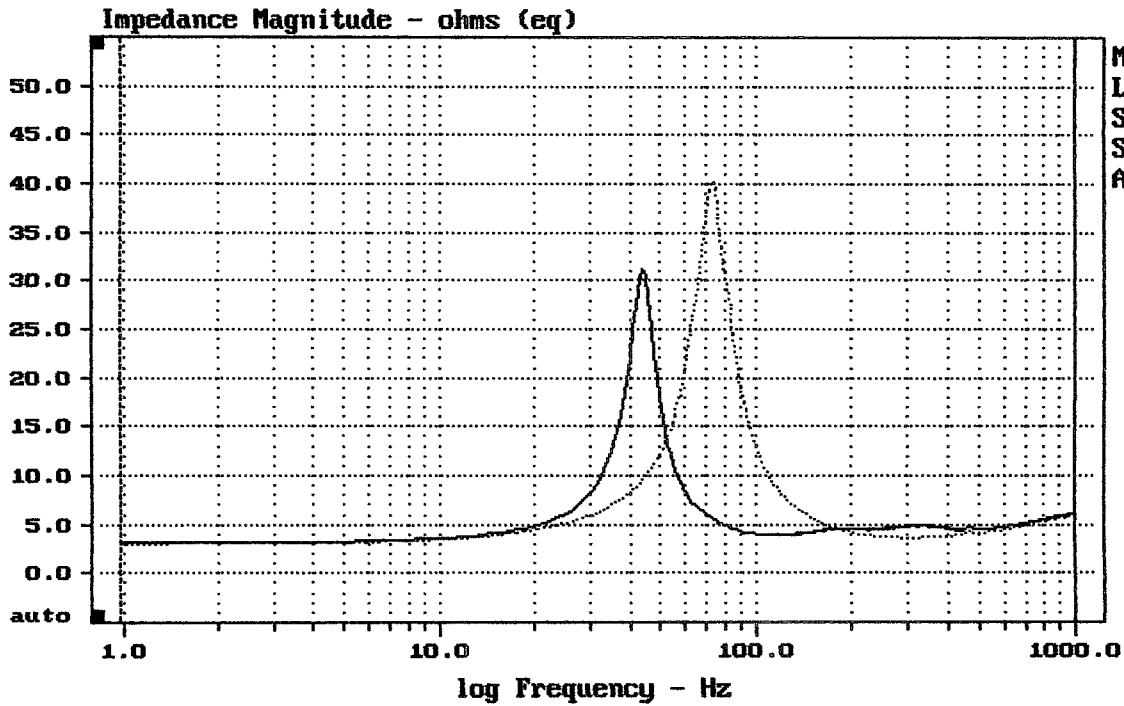

mean: 5.863, rms: 7.617, std: 4.863, max: 40.14, min: 3.081

DTTO

MLSSA: Frequency Domain