



Sensitivity Magnitude - dB SPL/watt (4 ohms, @1.60 meters)

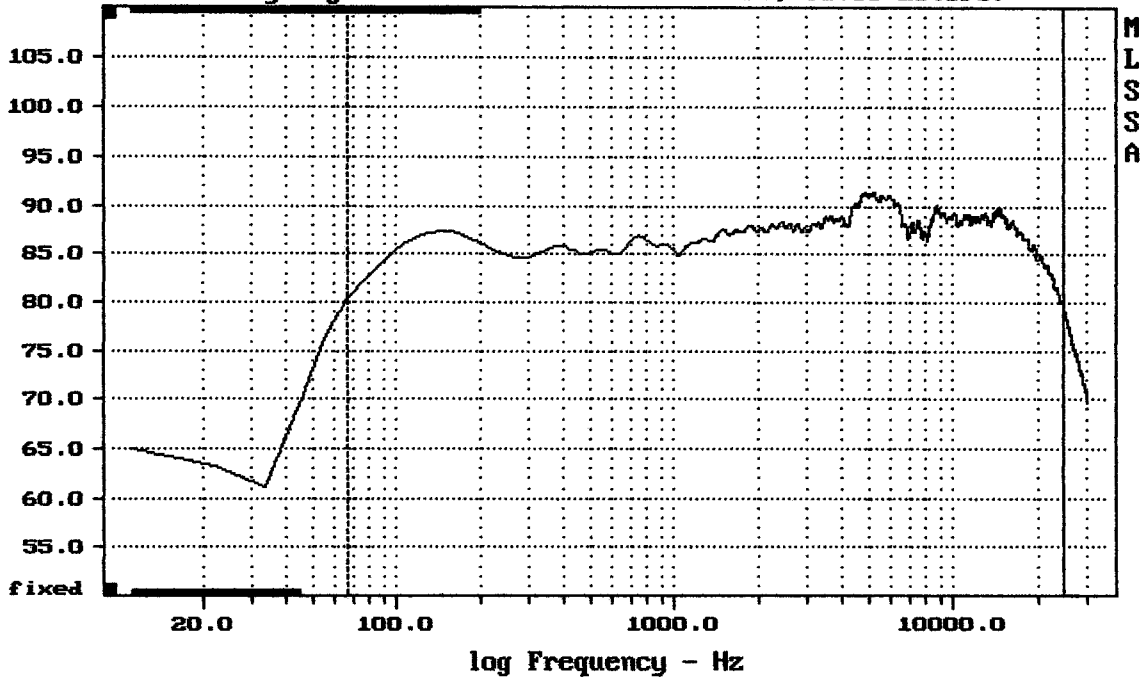

mean: 87.44, rms: 87.75, std: 2.10, max: 91.55, min: 79.35

MACKIE MRS MK III


MLSSA: Frequency Domain

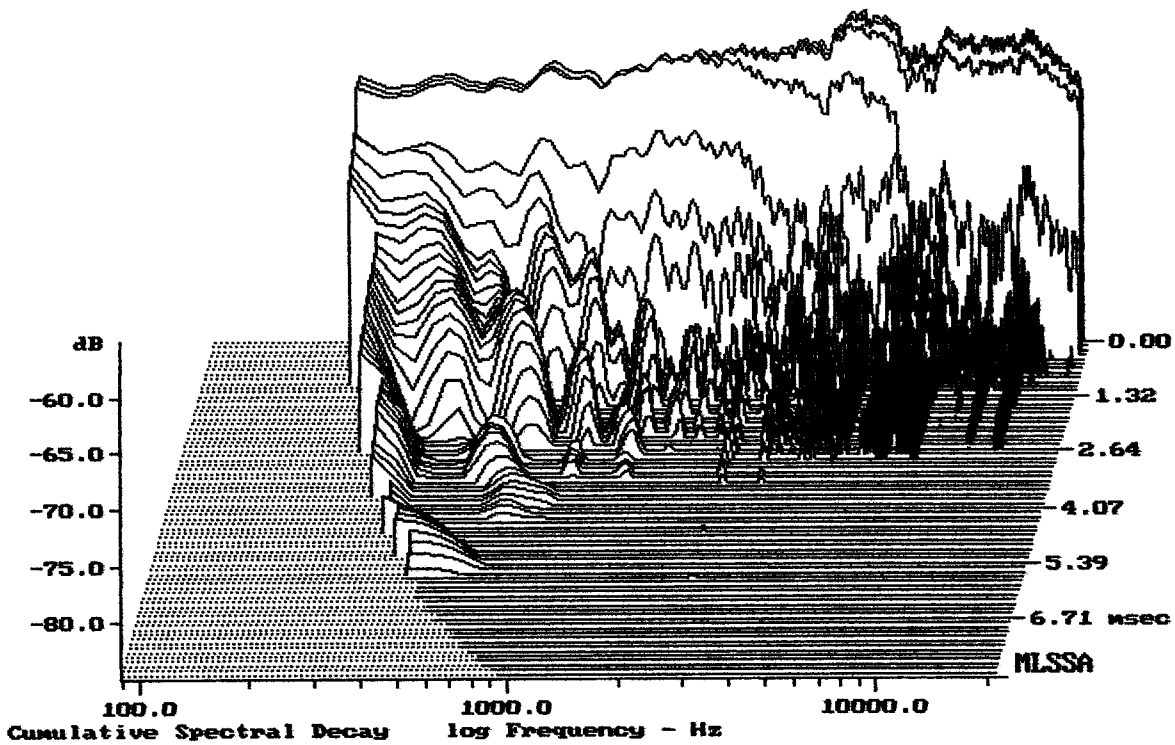

-84.02 dB, 5194 Hz (117), 2.860 msec (27)

DTTO

Step Response - volts

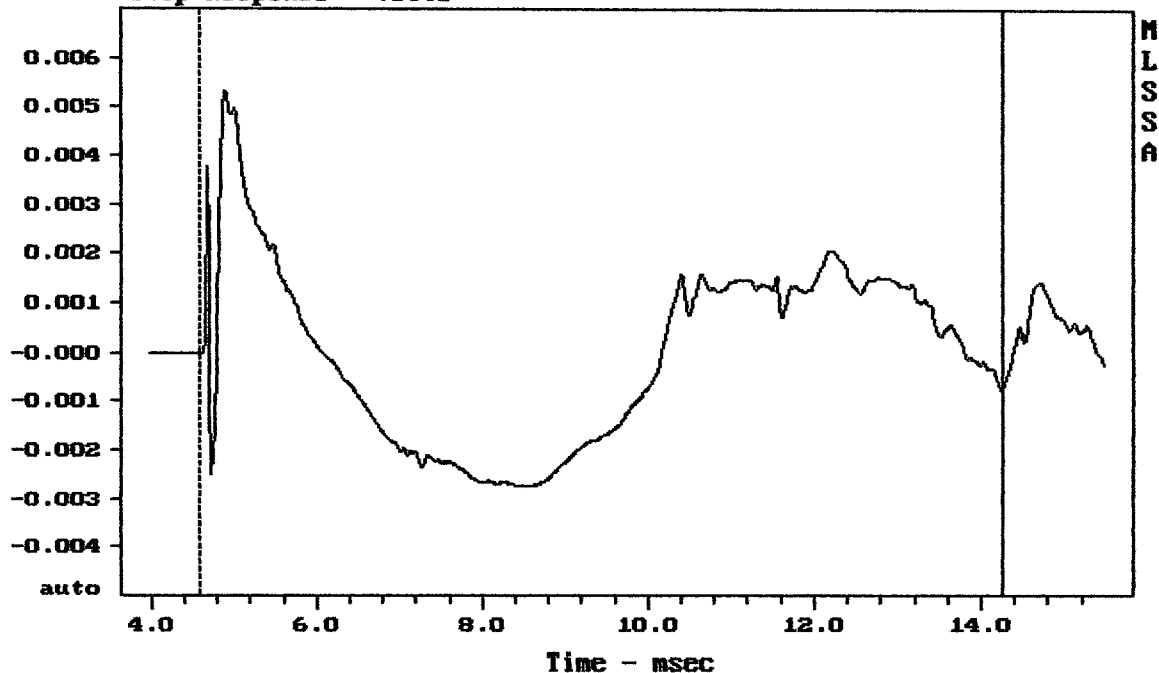


mean: -3.697e-005, rms: 0.001831, std: 0.001831, max: 0.005339, min: -0.002755

MACKIE MRS MK III

MLSSA: Time Domain

Sensitivity Mag - dB SPL/watt (4 ohms, @1.60 meters) (0.33 oct)

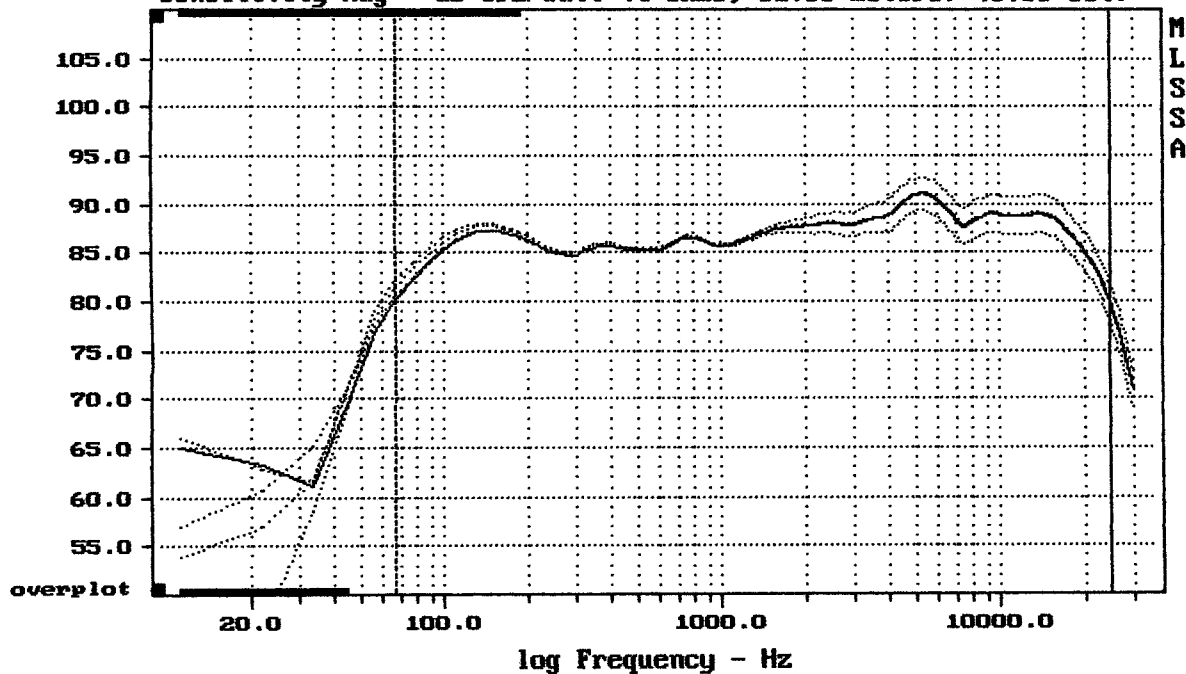


CURSOR: y = 81.5256 x = 24902.3430 (2244)

MACKIE MRS MK III

MLSSA: Frequency Domain

Sensitivity Phase - deg (dly:0.15 ms)

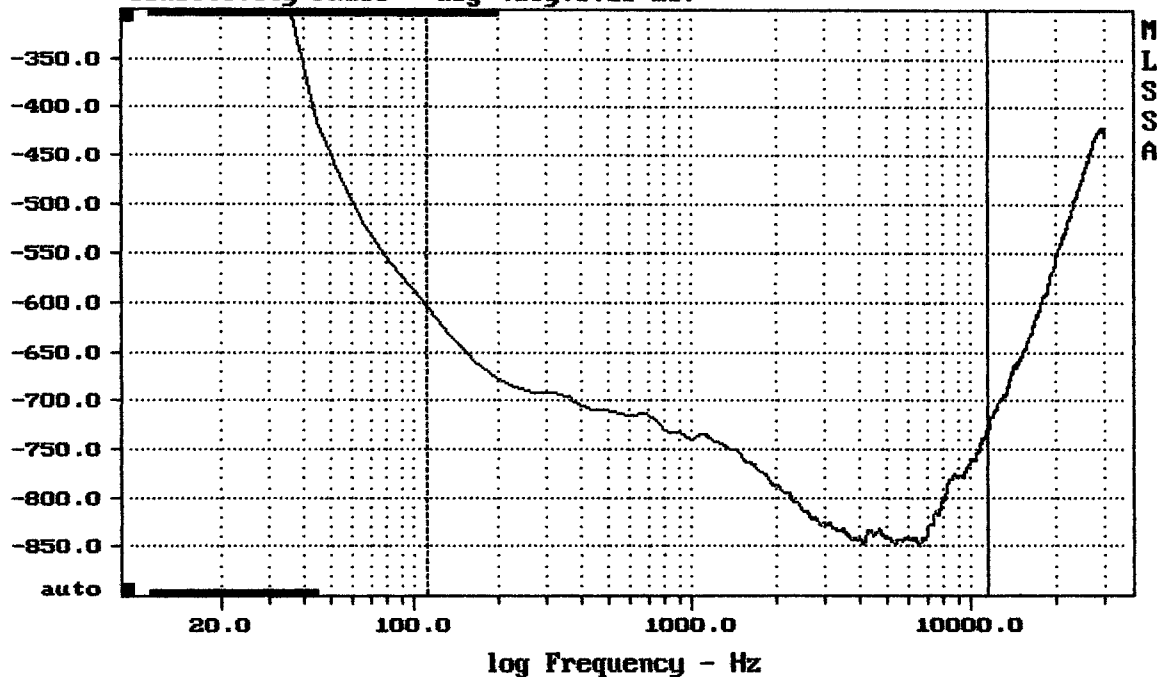

---


mean: -795.4, rms: 796.6, std: 44.62, max: -603.5, min: -849

---

MACKIE MRS MK III

MLSSA: Frequency Domain

Sensitivity Group Delay - ms

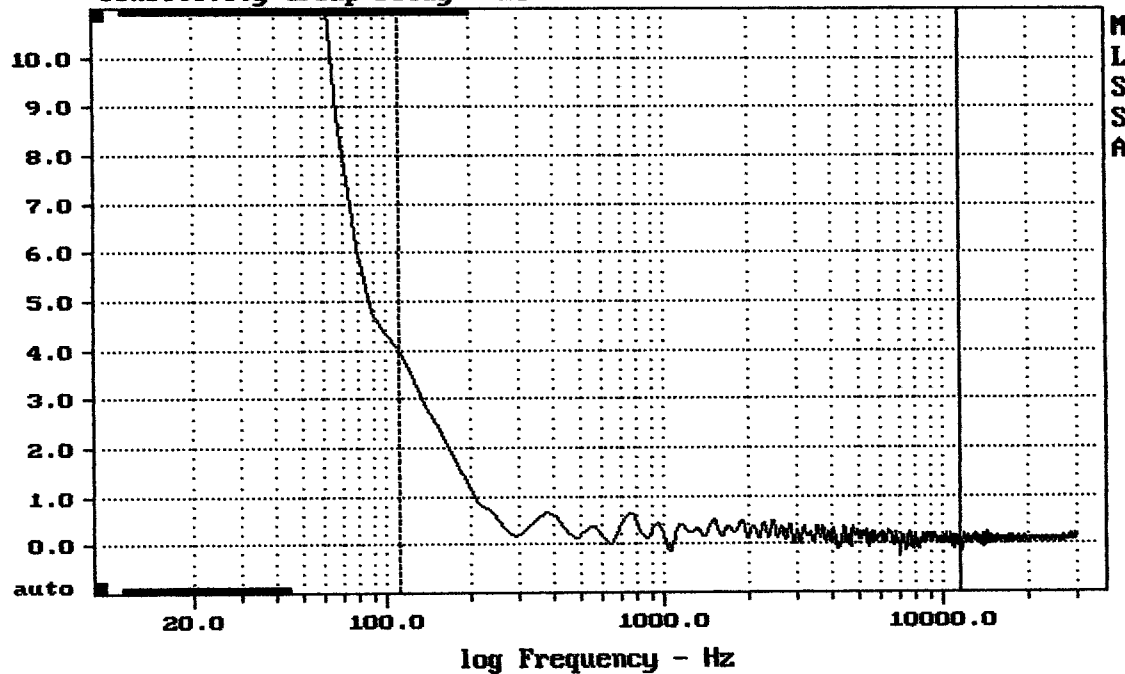

---


mean: 0.1783, rms: 0.3257, std: 0.2725, max: 4.021, min: -0.2574

---

MACKIE MRS MK III

MLSSA: Frequency Domain

Sensitivity Mag - dB SPL/watt (4 ohms, @1.60 meters) (0.33 oct)

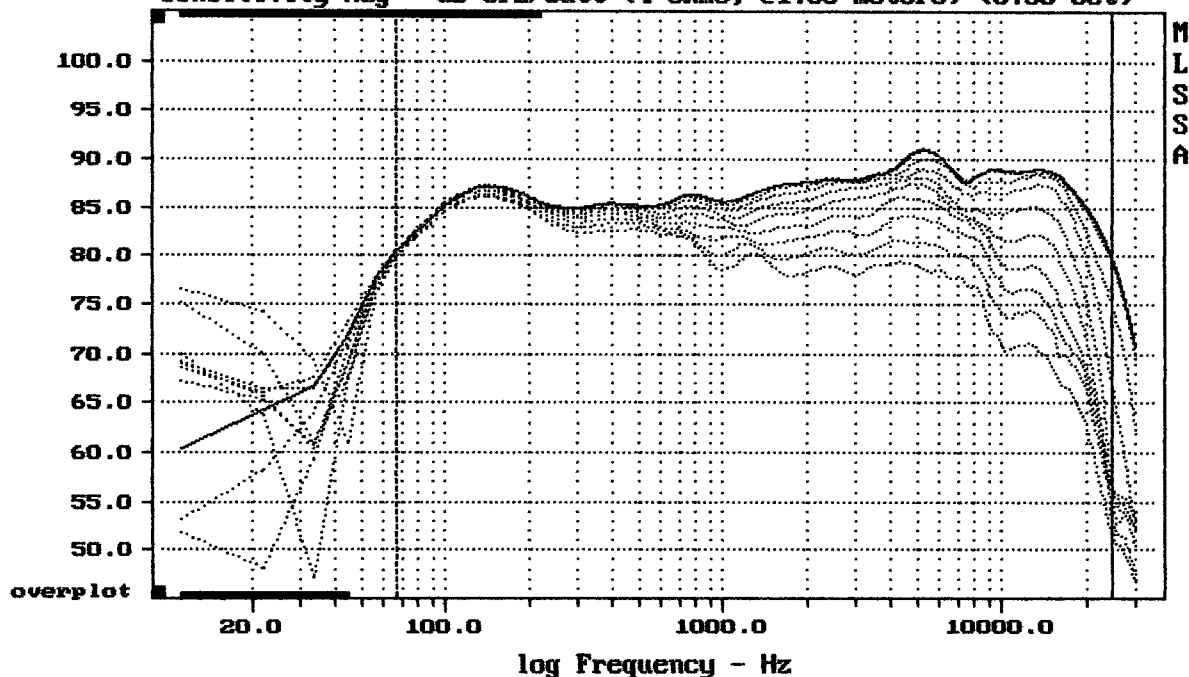


Overlay Compare: dev= +17/-11, std= 6.4, avg= -17

MACKIE MRS MK III

MLSSA: Frequency Domain

Sensitivity Mag - dB SPL/watt (4 ohms, @1.60 meters) (0.33 oct)

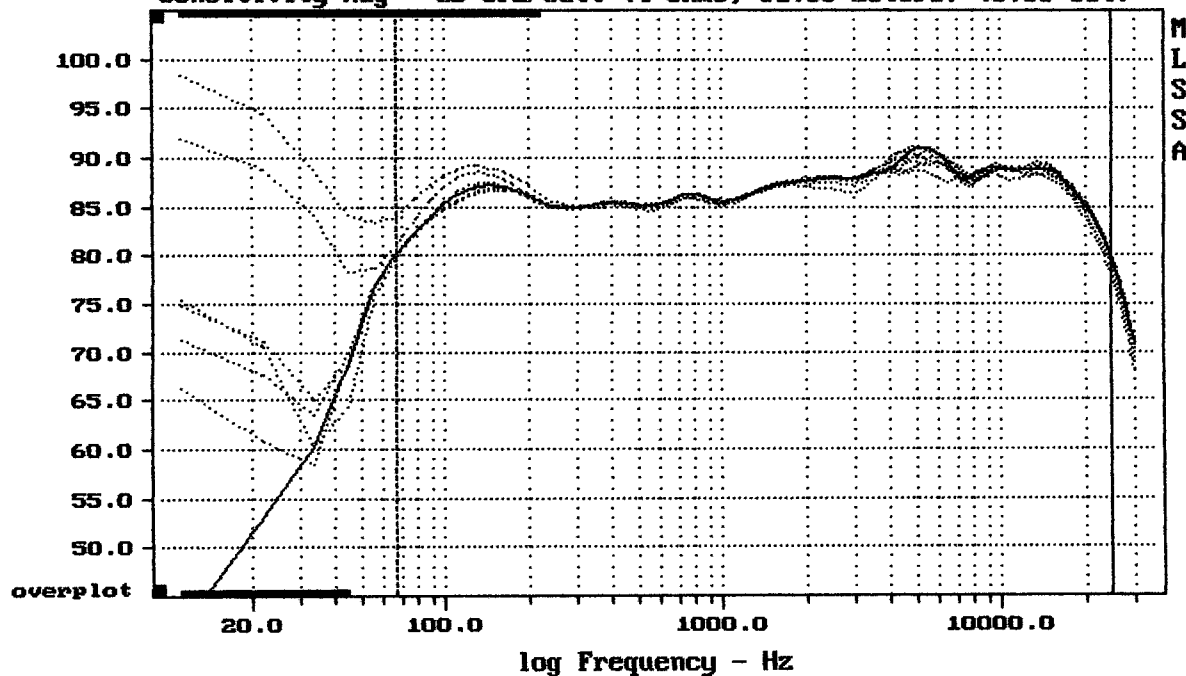

mean: 86.52, rms: 86.82, std: 2.86, max: 88.87, min: 77.77

MACKIE MRS MK III

MLSSA: Frequency Domain