


Level (100:400 Hz) = 96.37 dB SPL/watt (8 ohms, @1.00 meters)

10FW64

MLSSA: Frequency Domain

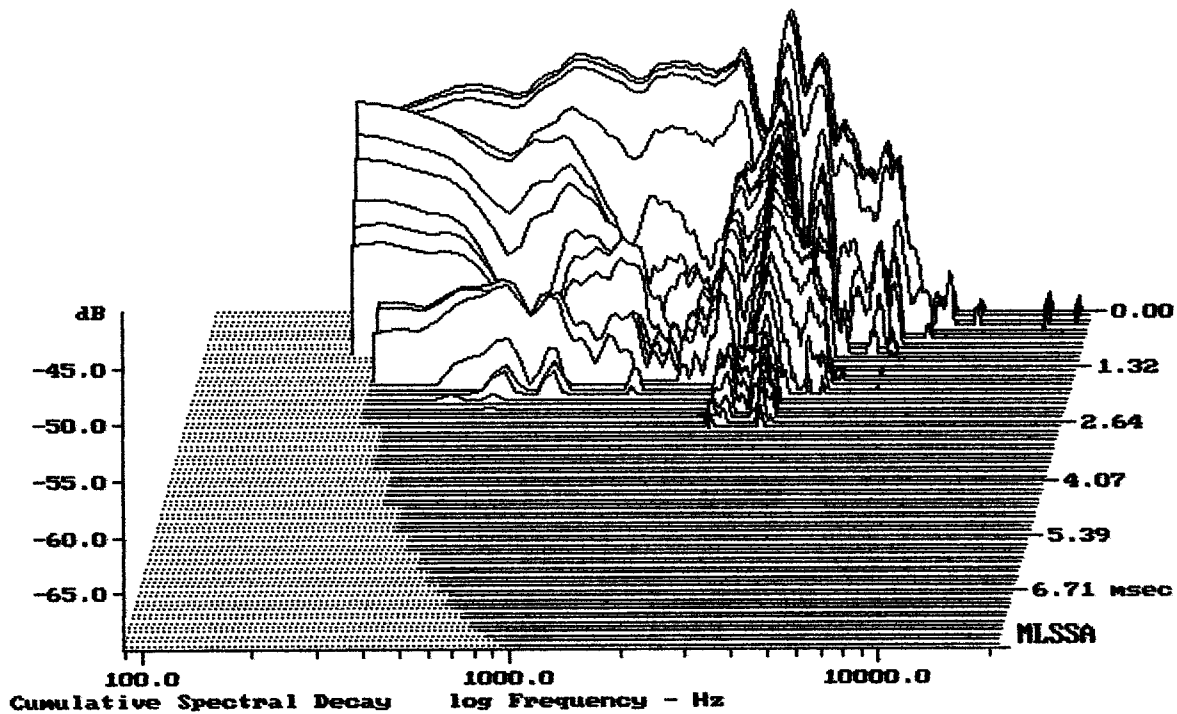

-68.95 dB, 2353 Hz (53), 2.750 msec (26)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.71	Ohms
2	Fs	79.43	Hz
3	Re	5.37	Ohms[dc]
4	Res	77.22	Ohms
5	Qms	4.69	
6	Qes	0.33	
7	Qts	0.31	
8	L1	0.46	mH
9	L2	1.13	mH
10	R2	4.41	Ohms
11	RMSE-load	0.33	Ohms
12	Vas(Sd)	23.40	liters
13	Mms	28.91	grams
14	Cms	139	$\mu\text{M}/\text{Newton}$
15	Bl	15.40	Tesla-M
16	SPLref(Sd)	97.4	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)


Area (Sd): 346.36 sq cm

DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -42.6% (-20% to -50% is recommended).

MLSSA: Parameters

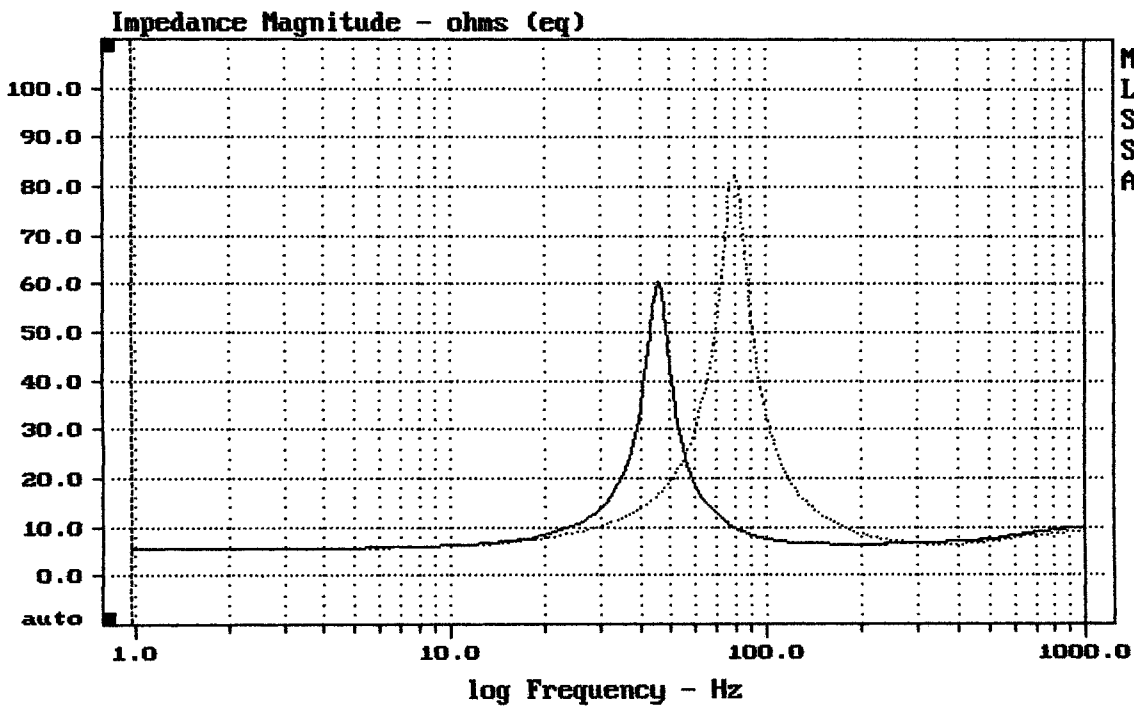

mean: 10.65, rms: 14.84, std: 10.34, max: 82.22, min: 5.468

DTTO

MLSSA: Frequency Domain