



Sensitivity Magnitude - dB SPL/watt (8 ohms, @1.65 meters)

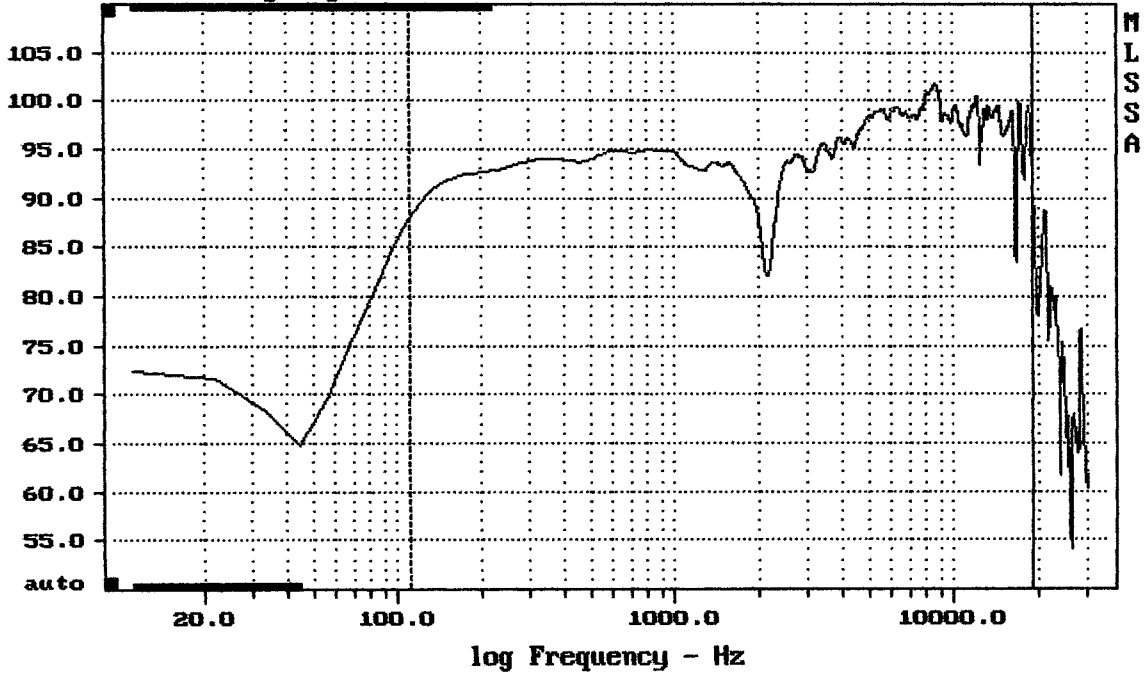

Level (111:19389 Hz) = 95.54 dB SPL/watt (8 ohms, @1.65 meters)

M602


MLSSA: Frequency Domain

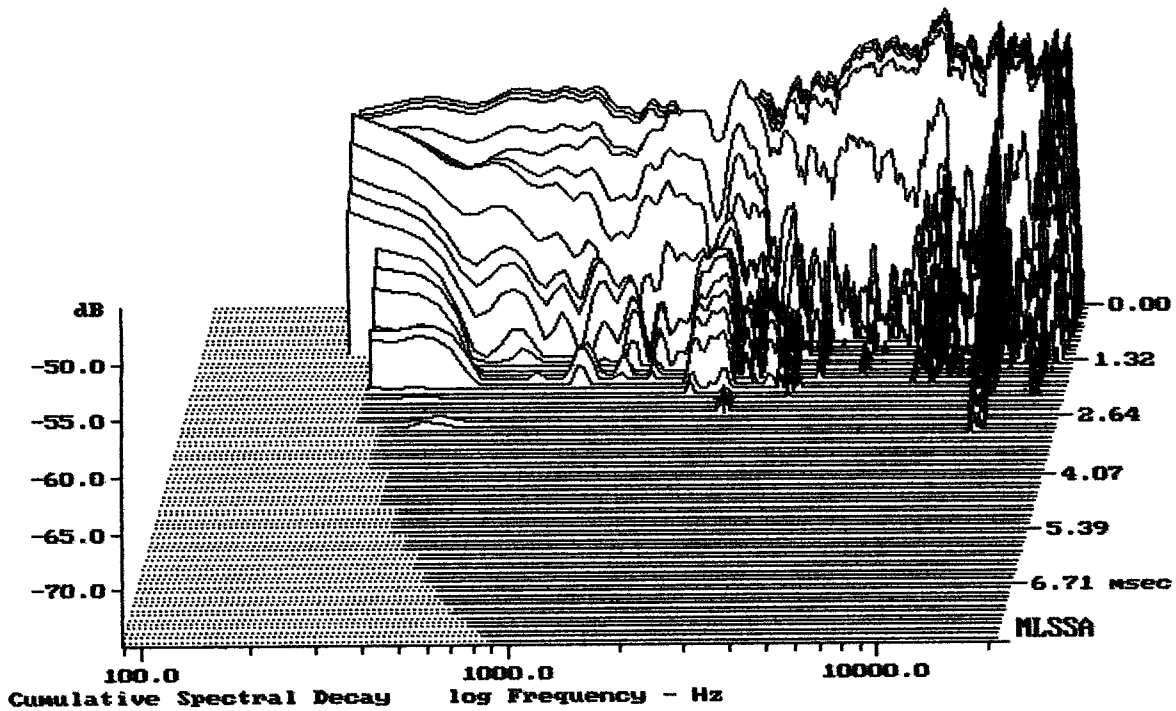

-74.01 dB, 2575 Hz (58), 2.530 msec (24)

DTTO

Step Response - volts

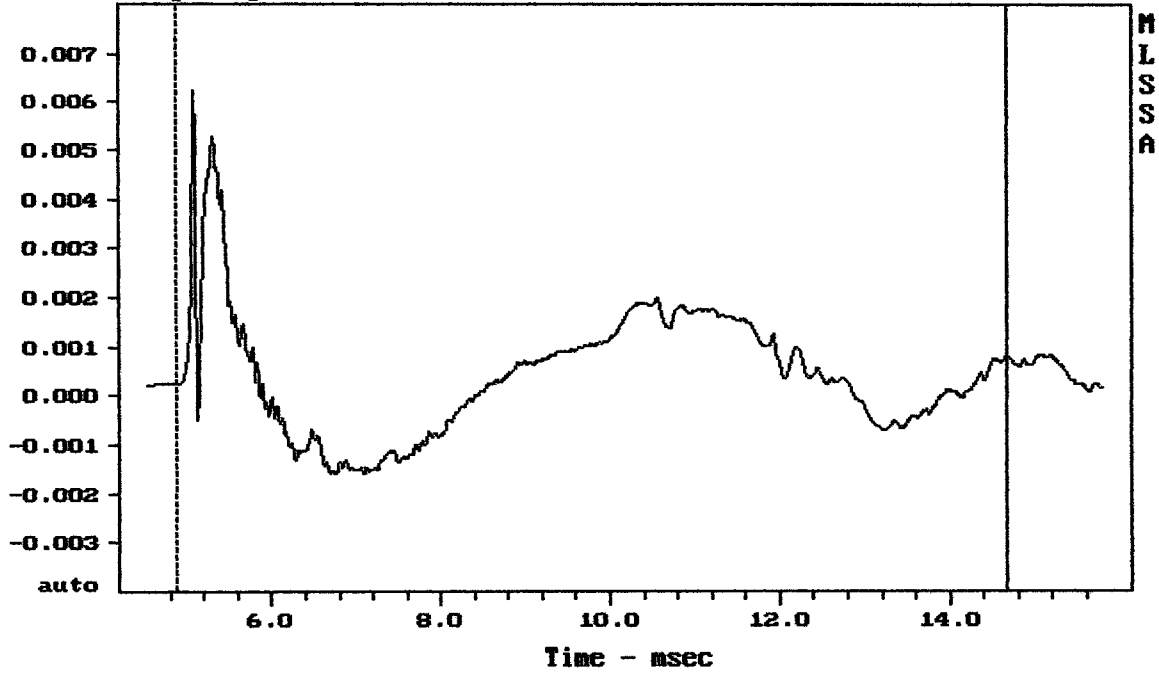

---


mean: 0.000417, rms: 0.001304, std: 0.001235, max: 0.006256, min: -0.001589

---

M602

MLSSA: Time Domain

Sensitivity Phase - deg (dly:0.29 ms)

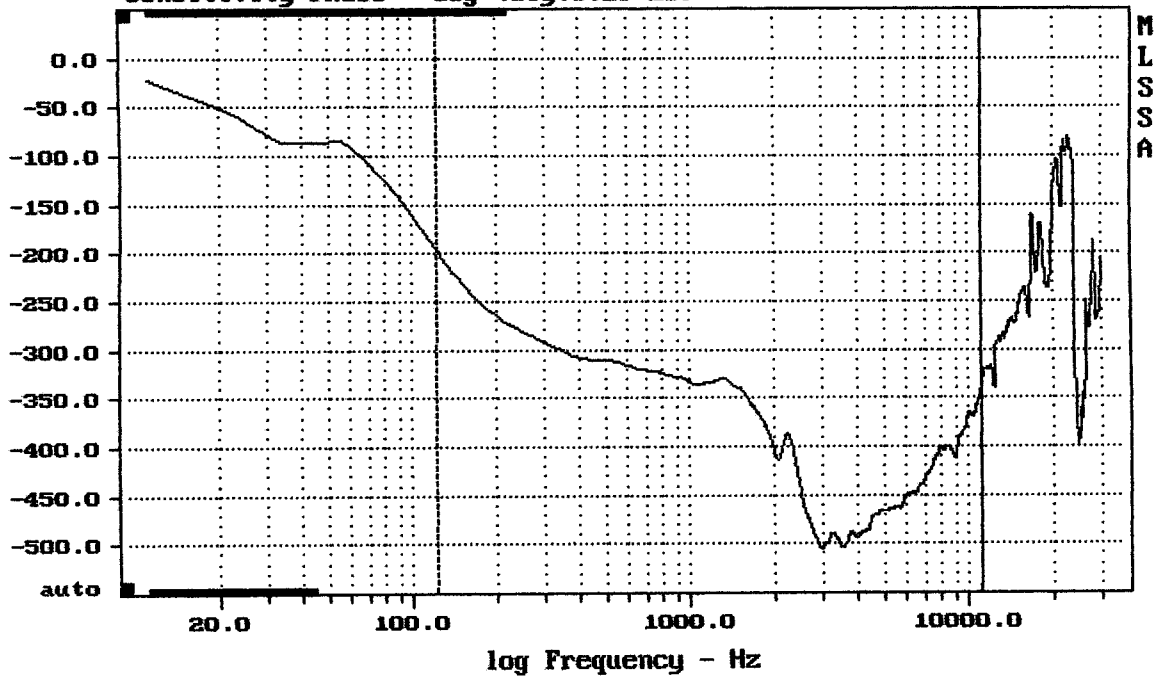


---

mean: -413.5, rms: 417.6, std: 57.88, max: -195.9, min: -504.5

---

M602


MLSSA: Frequency Domain

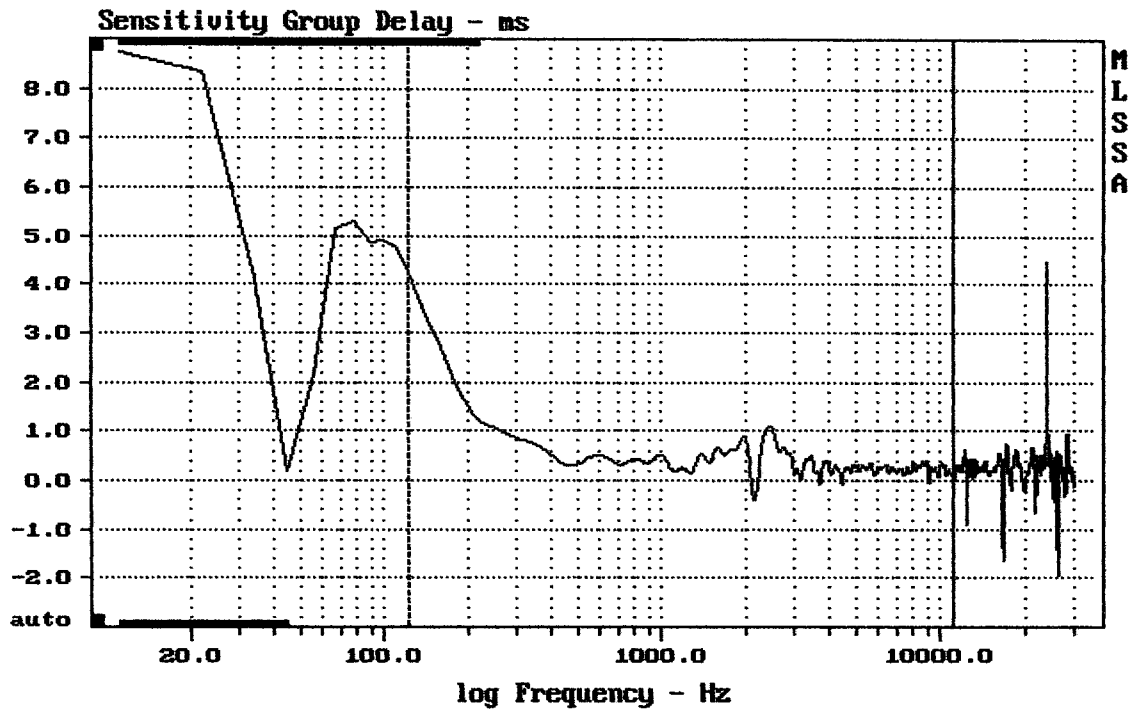

mean: 0.3245, rms: 0.4529, std: 0.3159, max: 4.263, min: -0.3884

M602


MLSSA: Frequency Domain

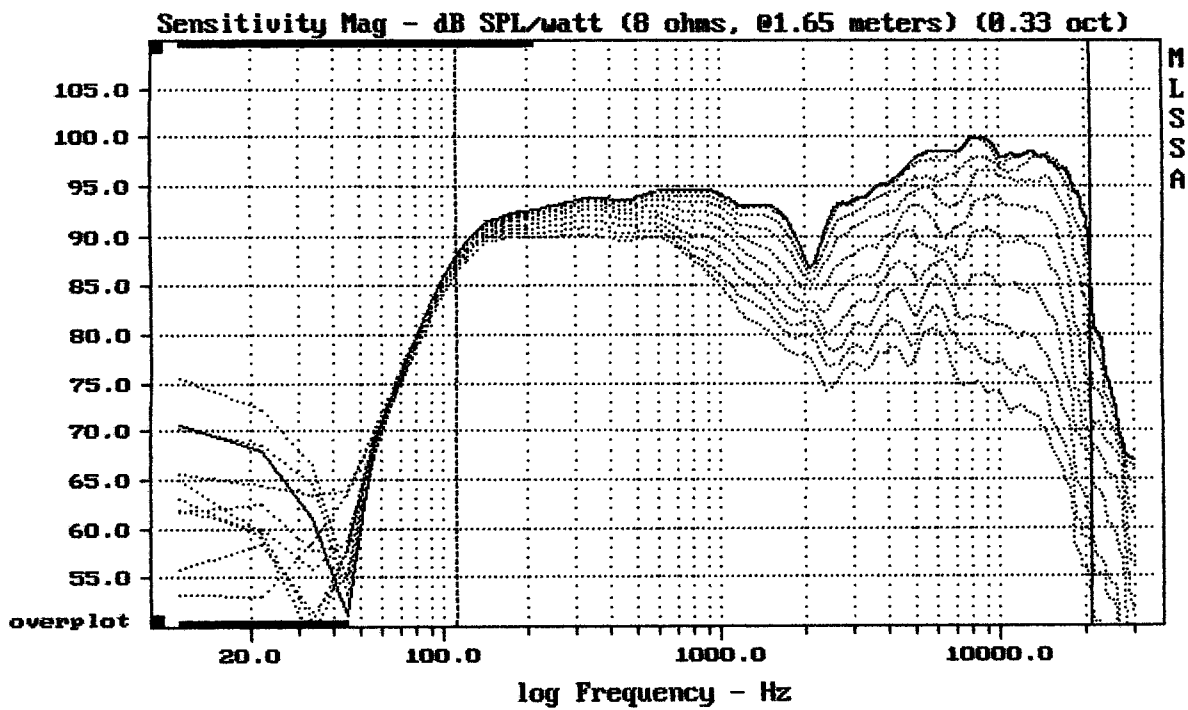

Overlay Compare: dev= +23/-13, std= 7.9, avg= -25

M602


MLSSA: Frequency Domain

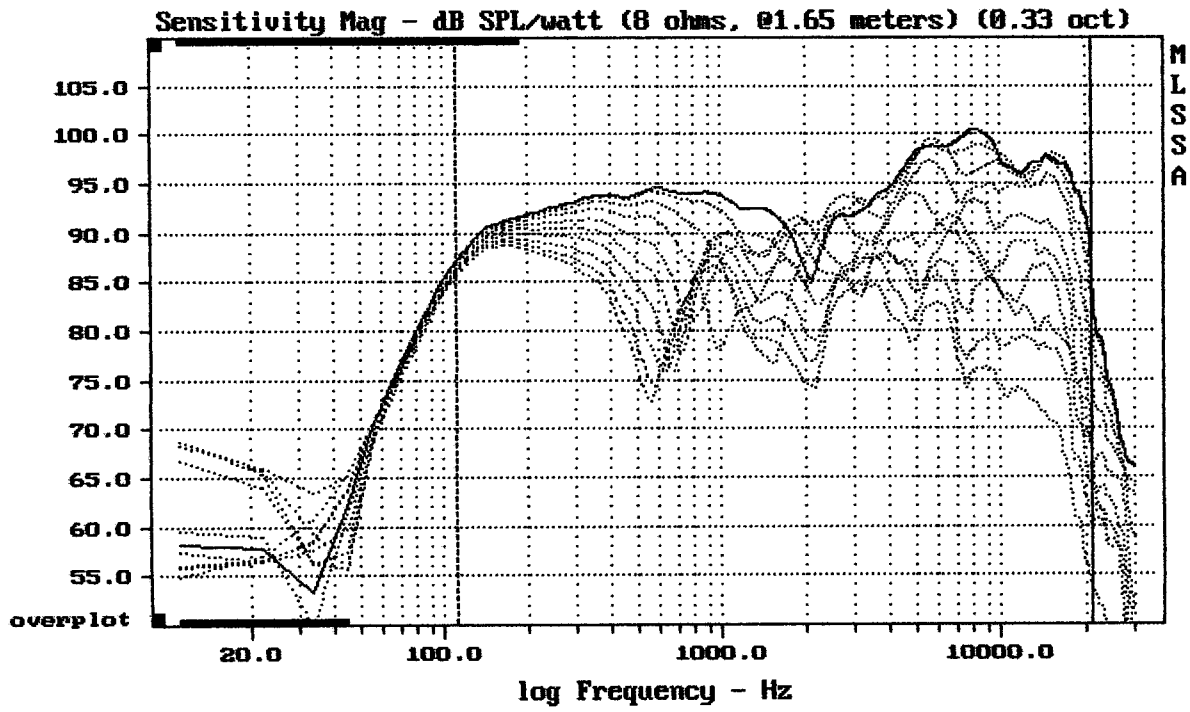

Overlay Compare: dev= +21/-13, std= 7.9, avg= -23

M602


MLSSA: Frequency Domain

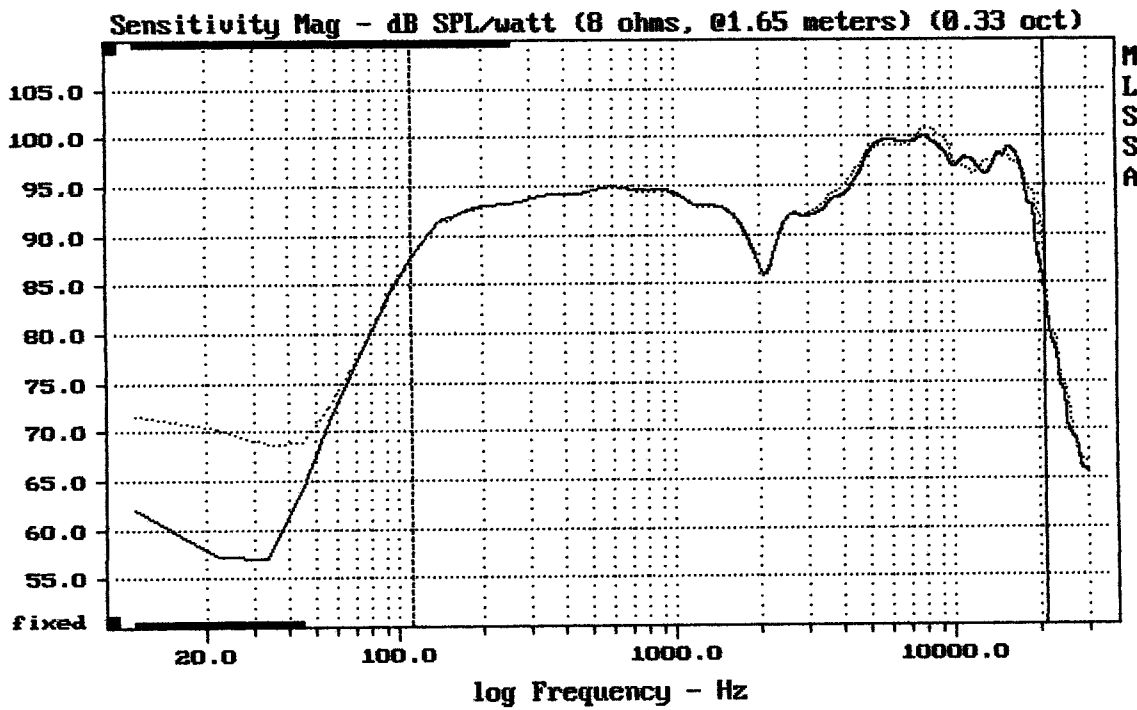

Overlay Compare: dev= +1.9/-4.3, std= 1.3, avg= -0.48

M602


MLSSA: Frequency Domain

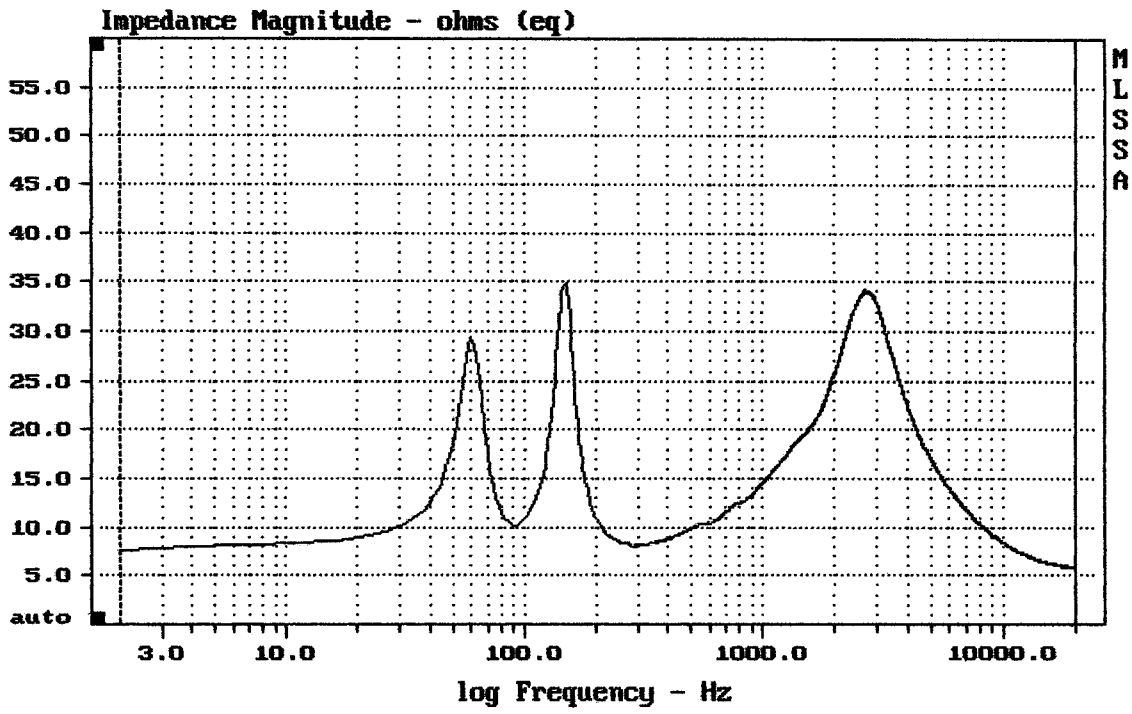


mean: 11.72, rms: 13.89, std: 7.46, max: 34.92, min: 5.768

M602

MLSSA: Frequency Domain

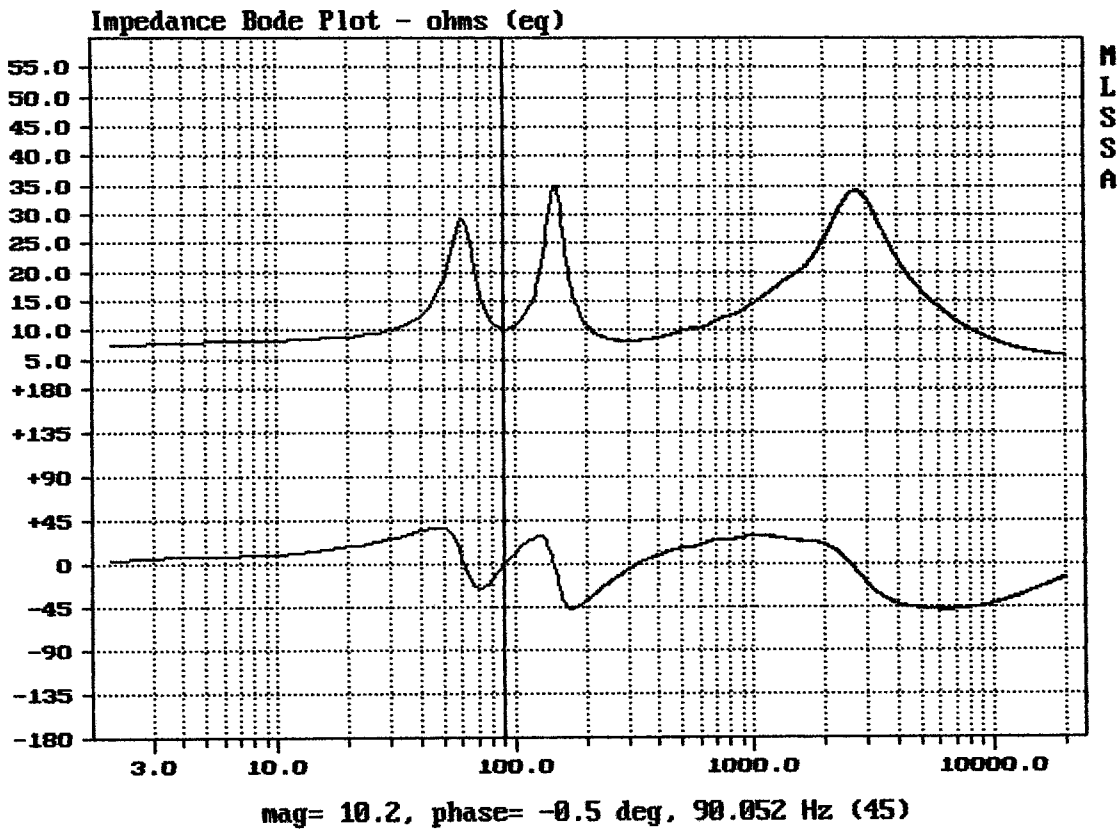


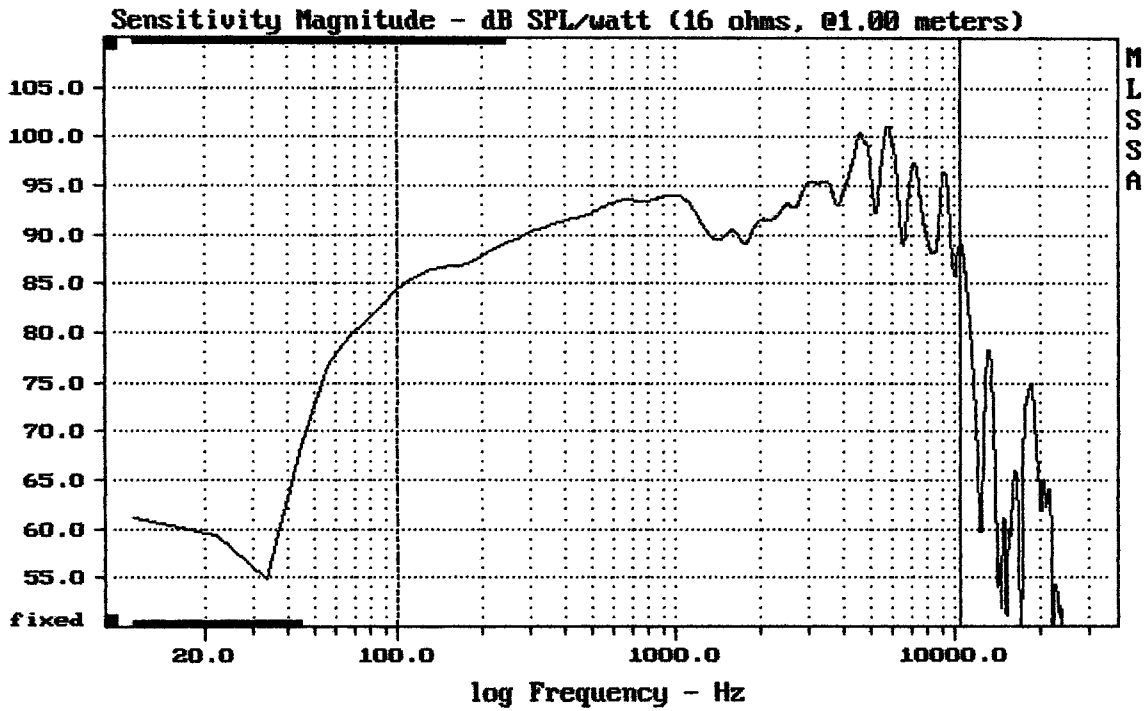

Level (100:10509 Hz) = 93.04 dB SPL/watt (16 ohms, @1.00 meters)

M602

MLSSA: Frequency Domain

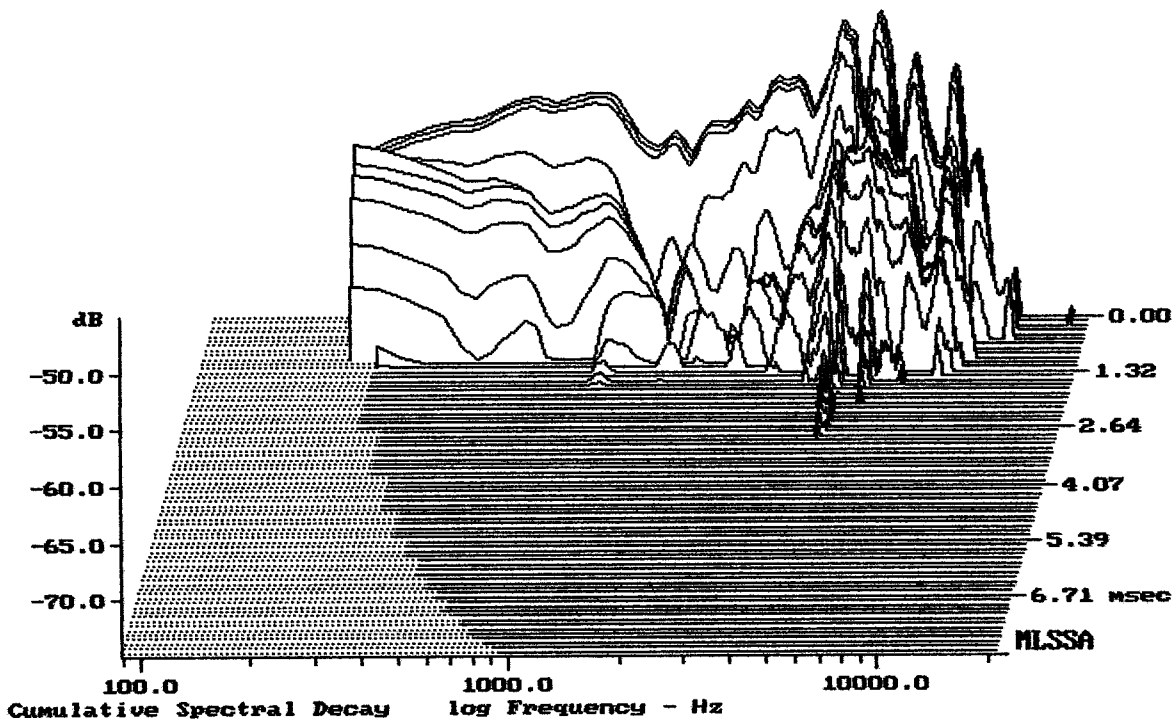

-74.22 dB, 4705 Hz (106), 2.860 msec (27)

DT10

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.38	Ohms
2	Fs	108.82	Hz
3	Re	14.46	Ohms[dc]
4	Res	100.18	Ohms
5	Qms	4.59	
6	Qes	0.66	
7	Qts	0.58	
8	L1	0.73	mH
9	L2	1.30	mH
10	R2	3.89	Ohms
11	RMSE-load	0.56	Ohms
12	Vas(Sd)	6.17	liters
13	Mms	8.58	grams
14	Cms	249	$\mu\text{M}/\text{Newton}$
15	B1	11.31	Tesla-M
16	SPLref(Sd)	92.6	dB[Re]
17	Rub-index	0.28	

Method: Mass-loaded (10.00 grams)

Area (Sd): 132.73 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.1% (-20% to -50% is recommended).

M602

MLSSA: Parameters

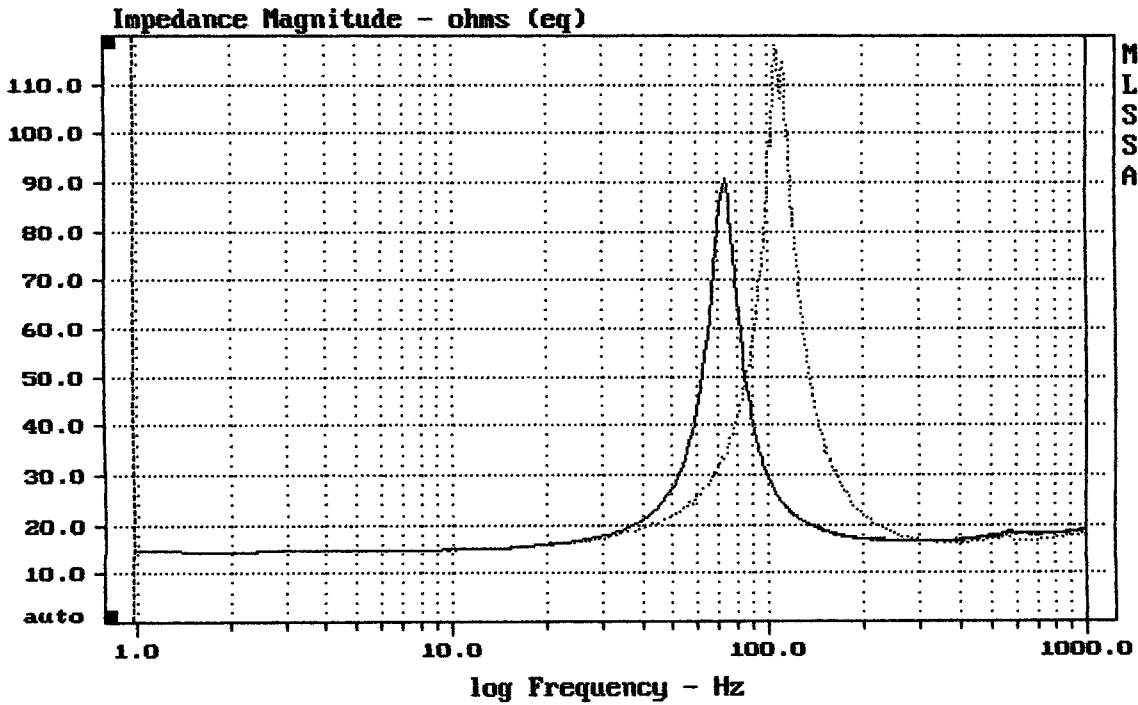

mean: 21.9, rms: 26.66, std: 15.2, max: 117.9, min: 14.59

MLSSA: Frequency Domain