


mean: 100.61, rms: 100.85, std: 1.85, max: 106.23, min: 90.14

RCF TT5-A


MLSSA: Frequency Domain

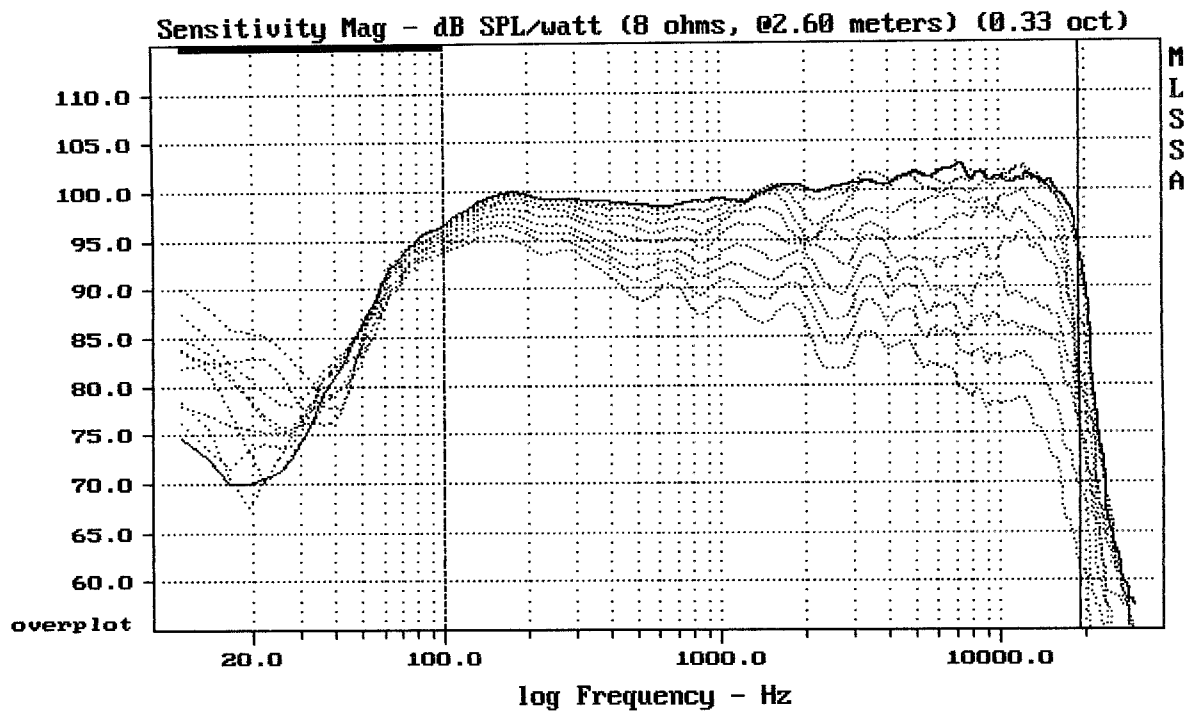

Overlay Compare: dev= +20/-11, std= 6.3, avg= -23

RCF TT5-A


MLSSA: Frequency Domain

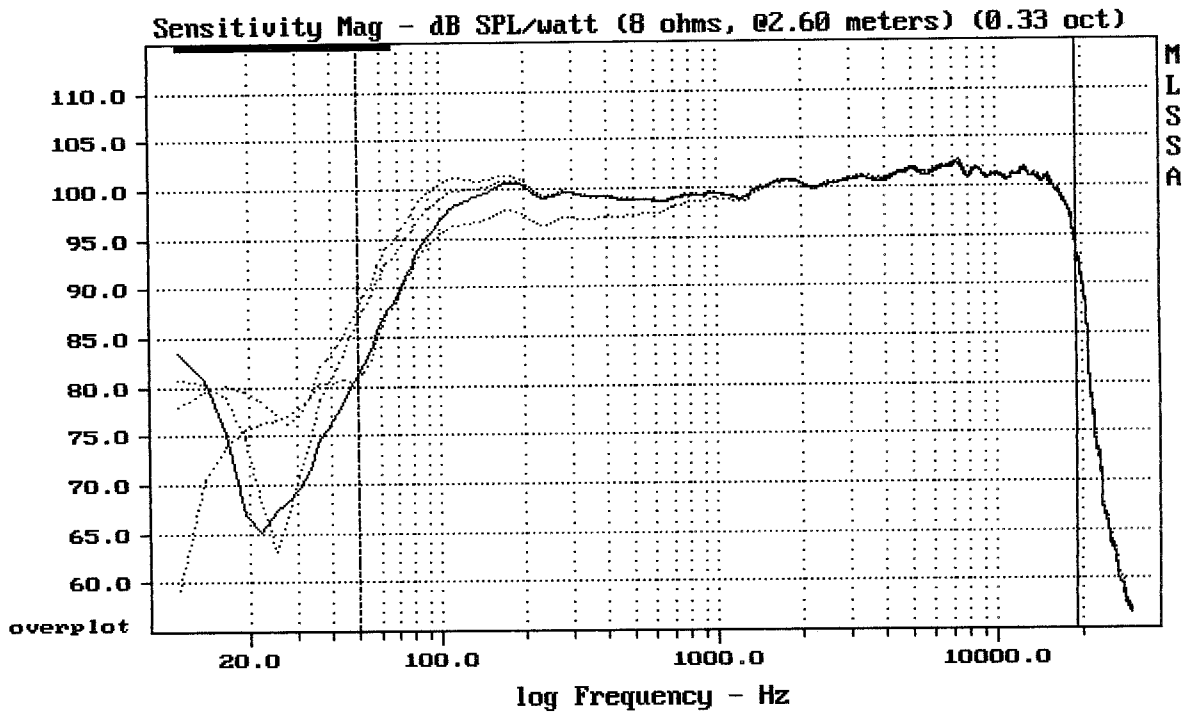

CURSOR: y = 94.1061 x = 19137.2952 (6898)

RCF TT5-A preset L3 .-. / L1 ... / L2 --- / L4 -.-


MLSSA: Frequency Domain

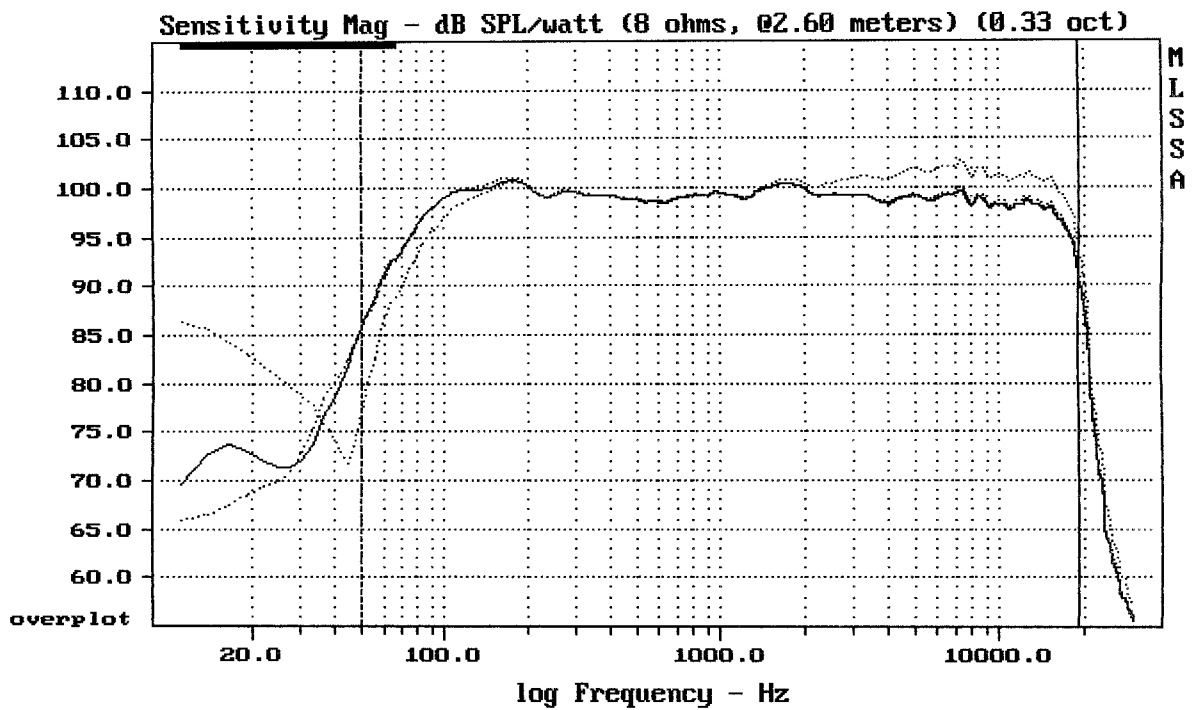

Overlay Compare: dev= +2.3/-6.4, std= 0.76, avg= -2.2

RCF TT5-A preset L1 ... / C1 --- / C2 .-.


MLSSA: Frequency Domain

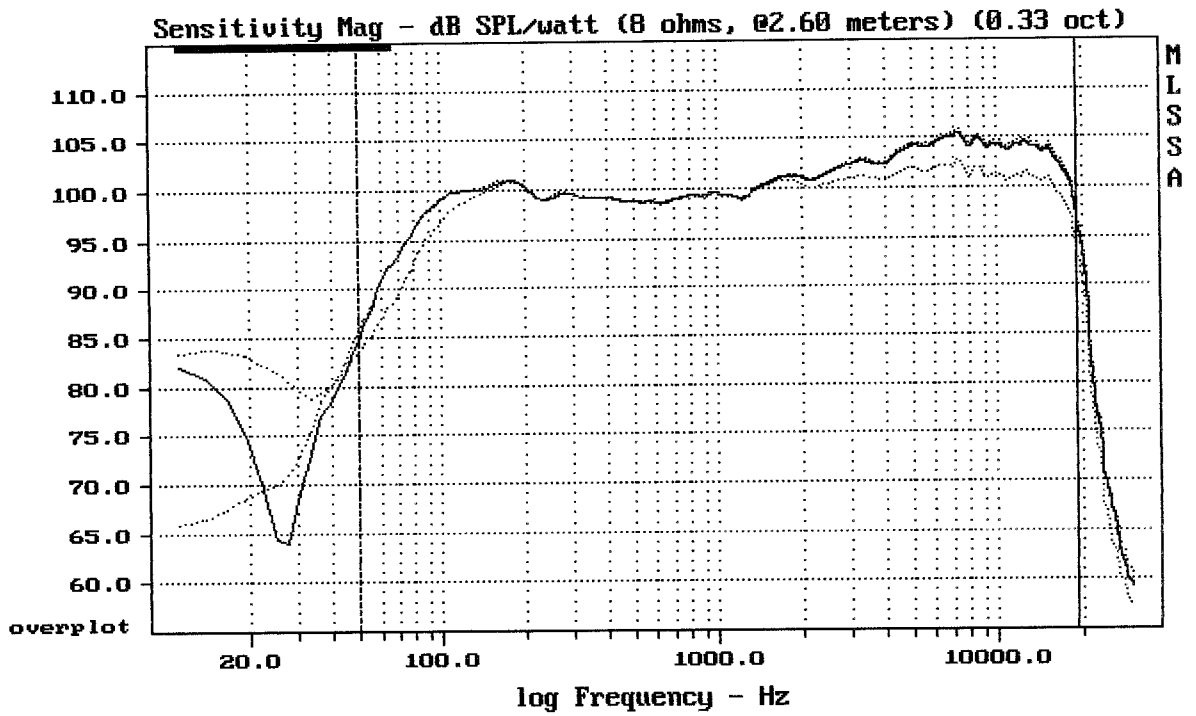

Overlay Compare: dev= +0.88/-6.9, std= 1.2, avg= 2.8

RCF TT5-A preset L1 ... / F1 --- / F2 .-.


MLSSA: Frequency Domain

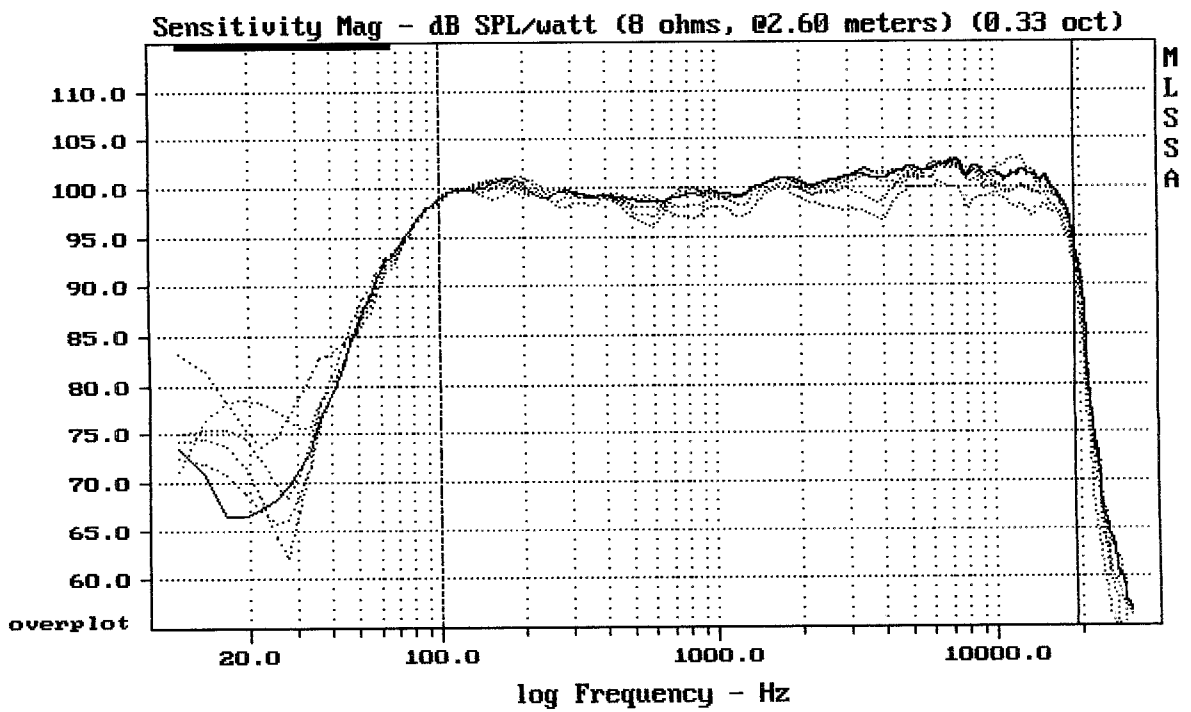

Overlay Compare: dev= +3.8/-1.9, std= 0.88, avg= -2.6

RCF TT5-A vert.


MLSSA: Frequency Domain

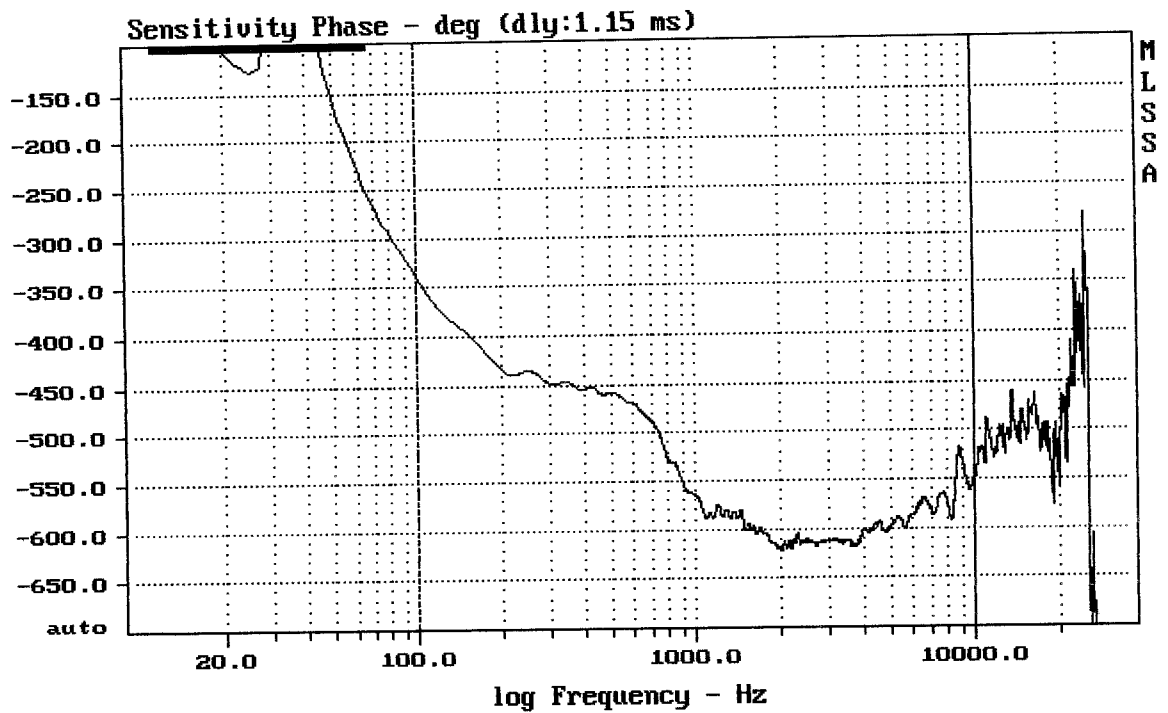

mean: -575.8, rms: 577.4, std: 42.03, max: -339.4, min: -622.4

RCF TT5-A


MLSSA: Frequency Domain

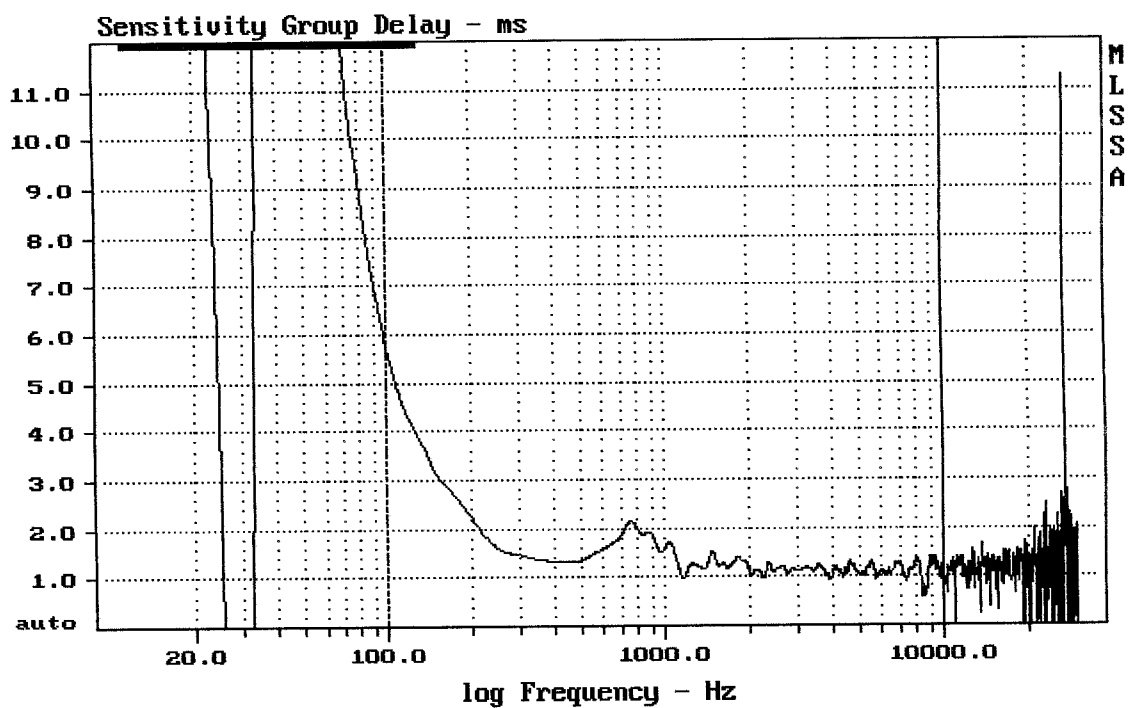

mean: 1.208, rms: 1.251, std: 0.3267, max: 5.674, min: 0.5854


RCF TT5-A

MLSSA: Frequency Domain

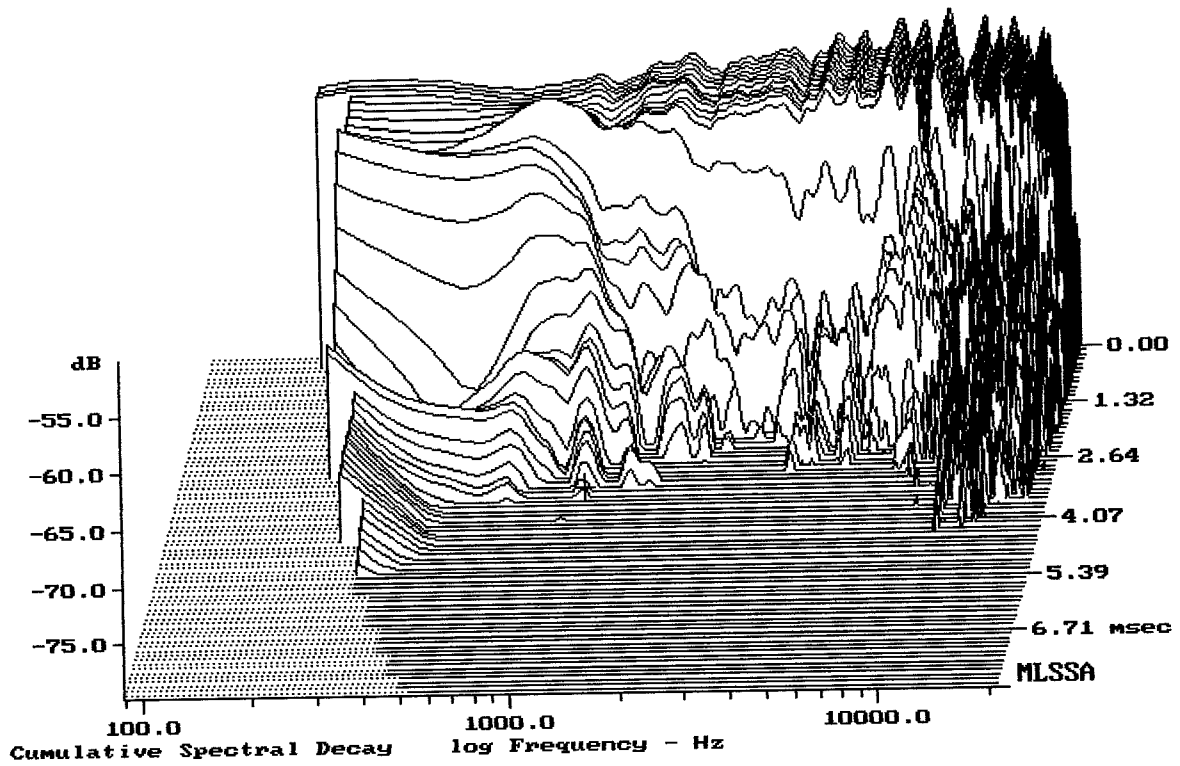


-79.23 dB, 1154 Hz (26), 3.410 msec (32)

RCF TT5-A

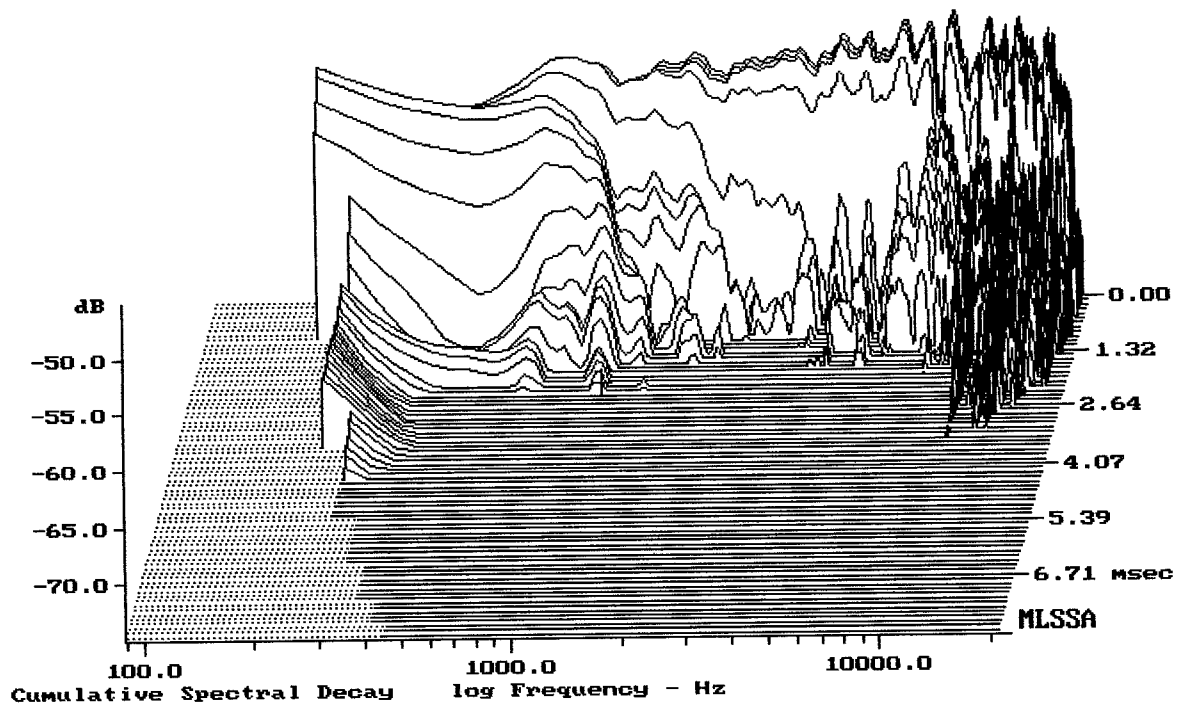

-74.27 dB, 1154 Hz (26), 2.200 msec (21)

RCF TT5-A

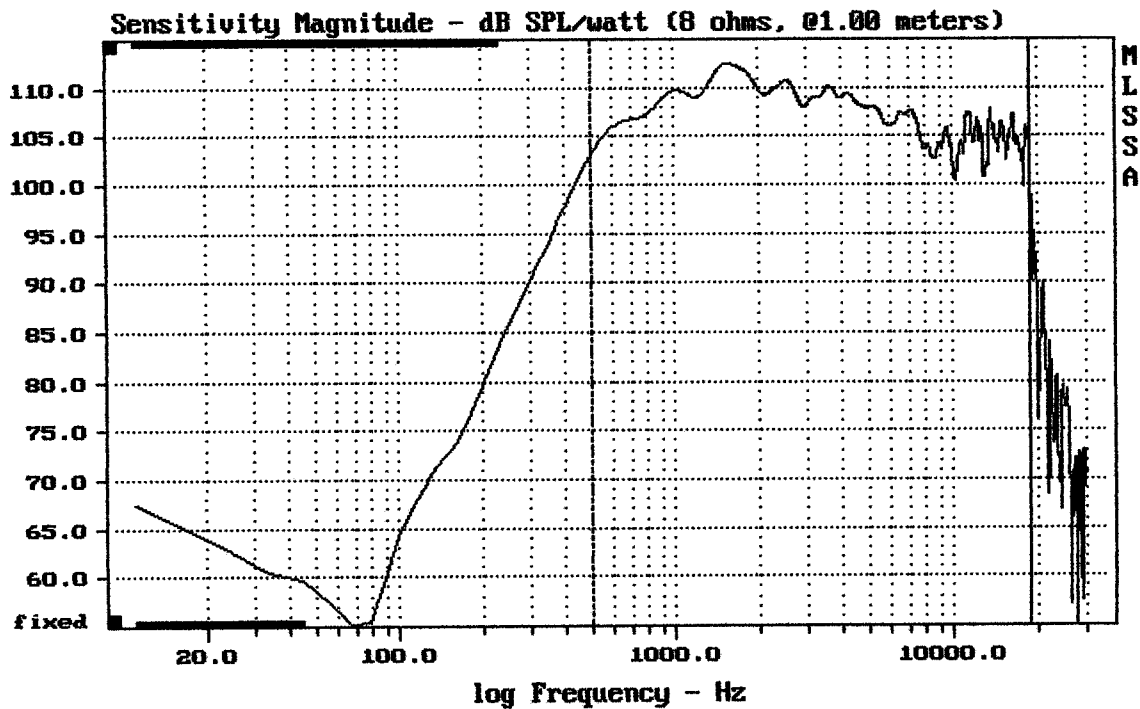


Level (499:18999 Hz) = 108.33 dB SPL/watt (8 ohms, @1.00 meters)

TTS-A


9-6-93 10:21 PM

MLSSA: Frequency Domain

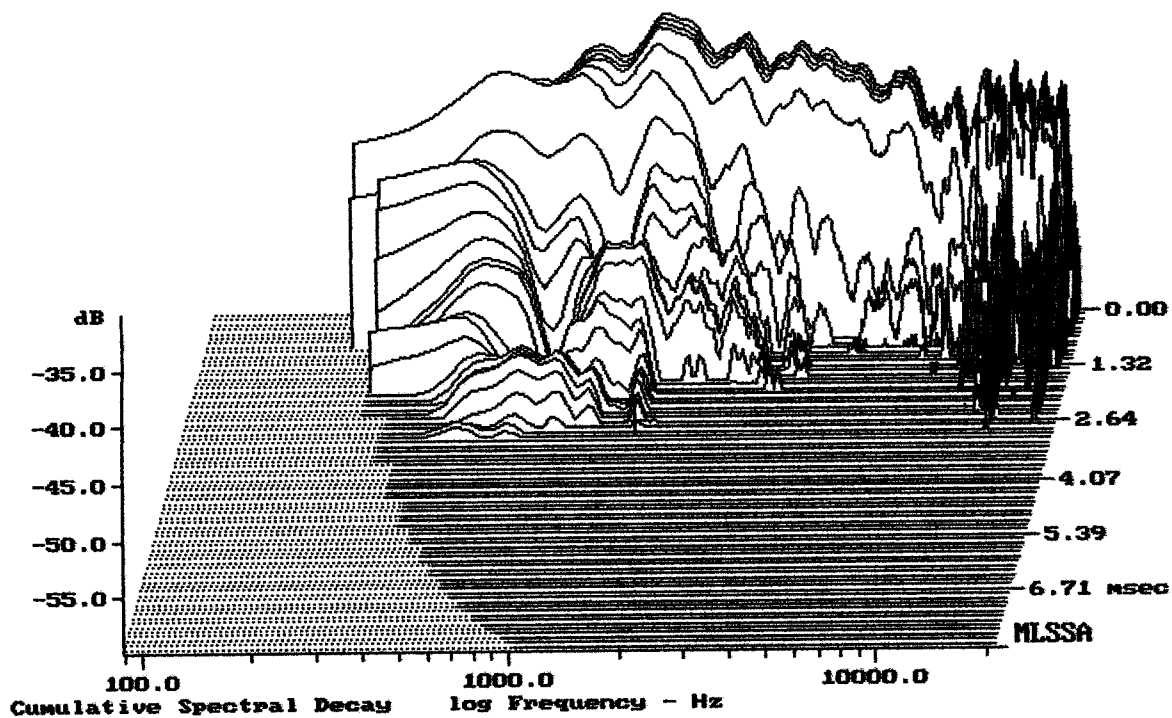

-59.55 dB, 1509 Hz (34), 2.750 msec (26)


DTTO

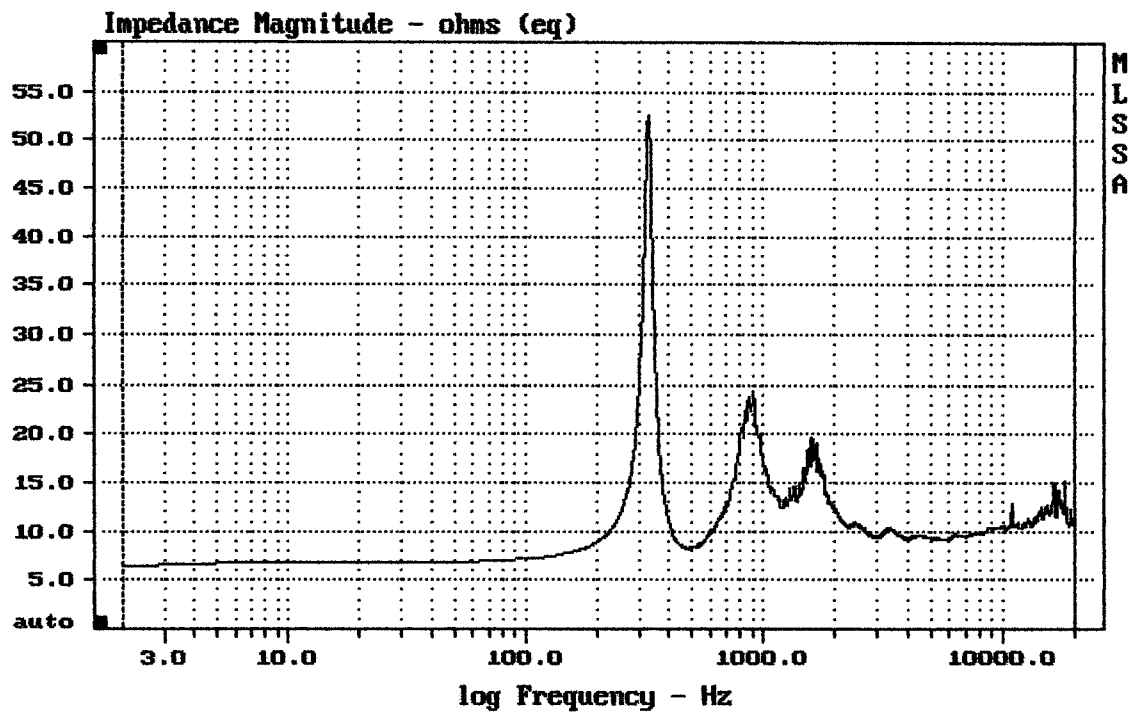

mean: 11.16, rms: 11.44, std: 2.497, max: 52.55, min: 6.404


TT5-A

MLSSA: Frequency Domain

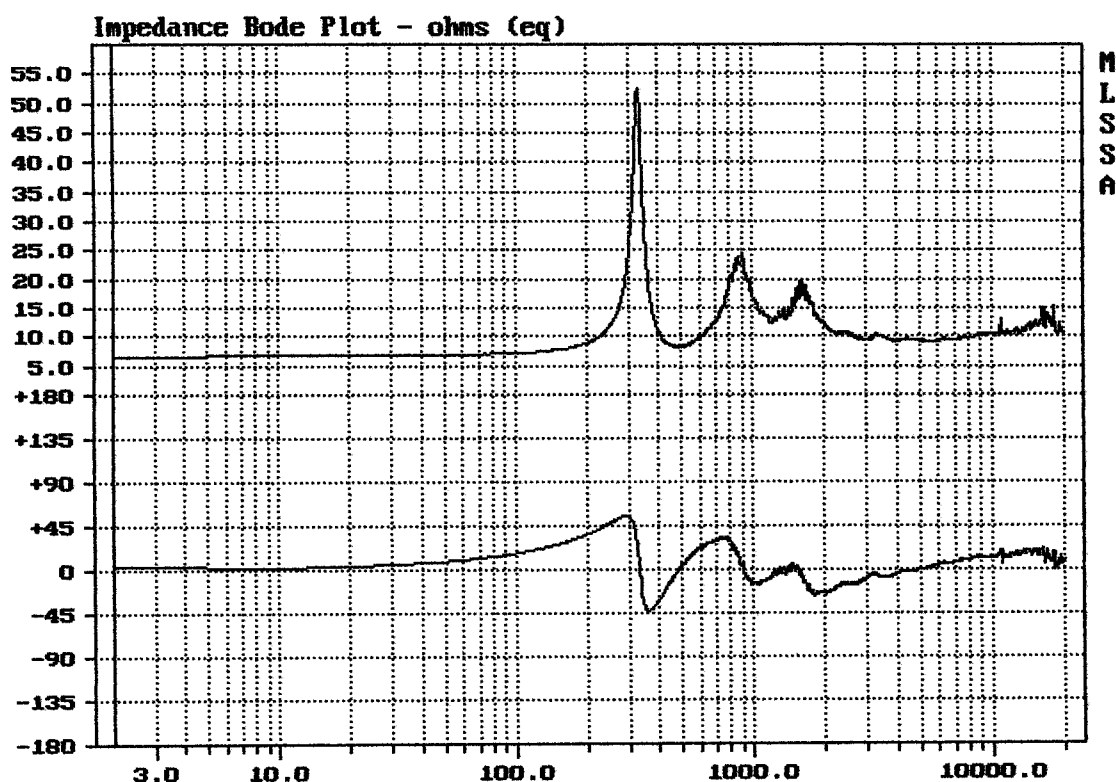

mag= 6.4, phase= 3.6 deg, 2.001 Hz (1)


DTTO

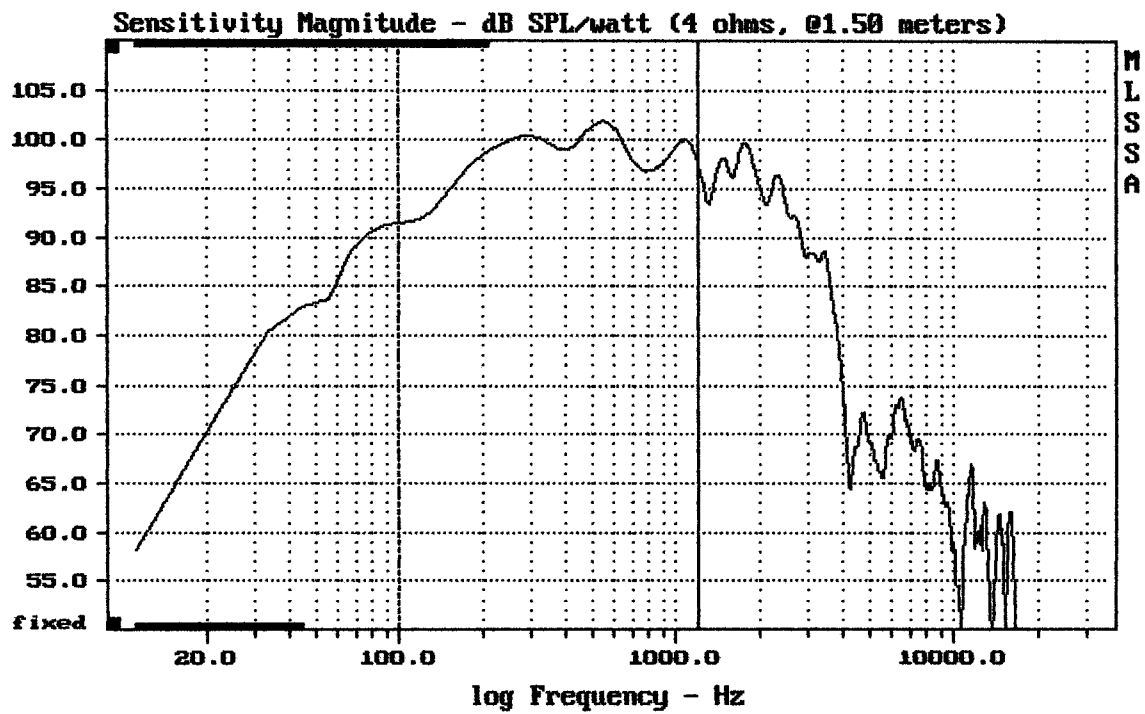

Level (100:1210 Hz) = 98.72 dB SPL/watt (4 ohms, @1.50 meters)

IT5-A

MLSSA: Frequency Domain

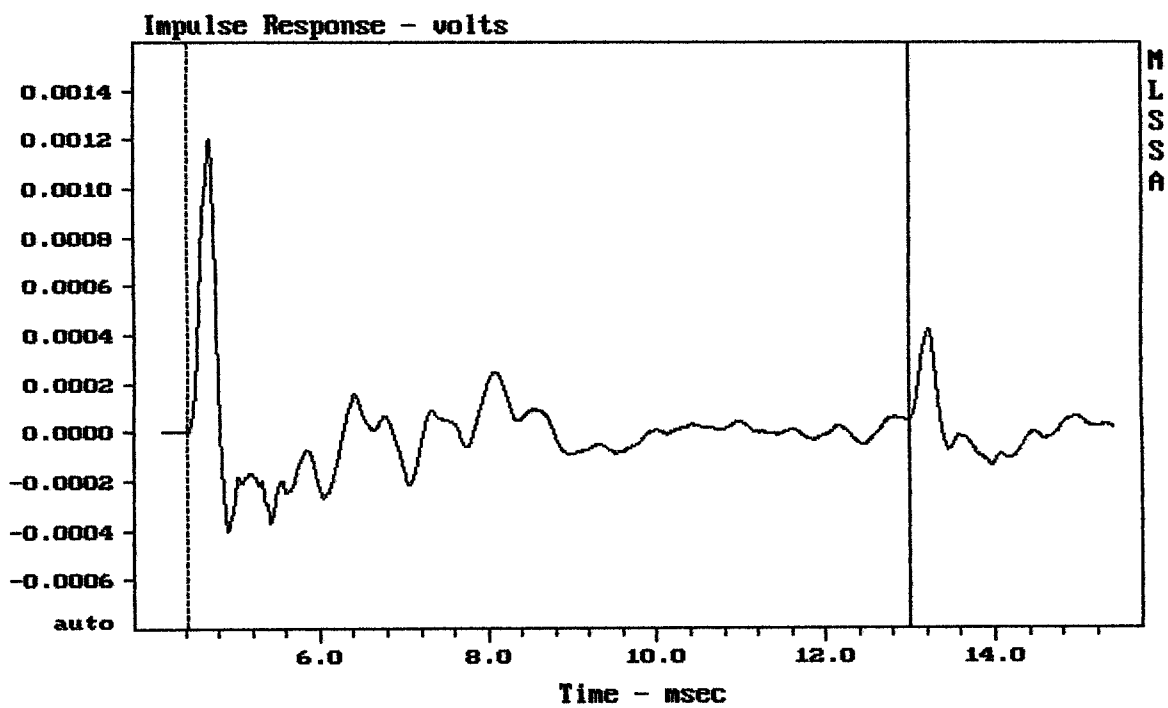

mean: -2.056e-006, rms: 0.000188, std: 0.000188, max: 0.001204, min: -0.000402

IT5-A

MLSSA: Time Domain

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.41	Ohms
2	Fs	48.83	Hz
3	Re	2.38	Ohms[dc]
4	Res	78.67	Ohms
5	Qms	6.65	
6	Qes	0.20	
7	Qts	0.20	
8	L1	0.52	mH
9	L2	1.20	mH
10	R2	4.20	Ohms
11	RMSE-load	0.66	Ohms
12	Vas(Sd)	130.36	liters
13	Mms	94.35	grams
14	Cms	113	$\mu\text{M}/\text{Newton}$
15	B1	18.51	Tesla-M
16	SPLref(Sd)	100.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 907.92 sq cm


DCR mode: Measure (-0.14 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.1% (-20% to -50% is recommended).

TT5-A

MLSSA: Parameters

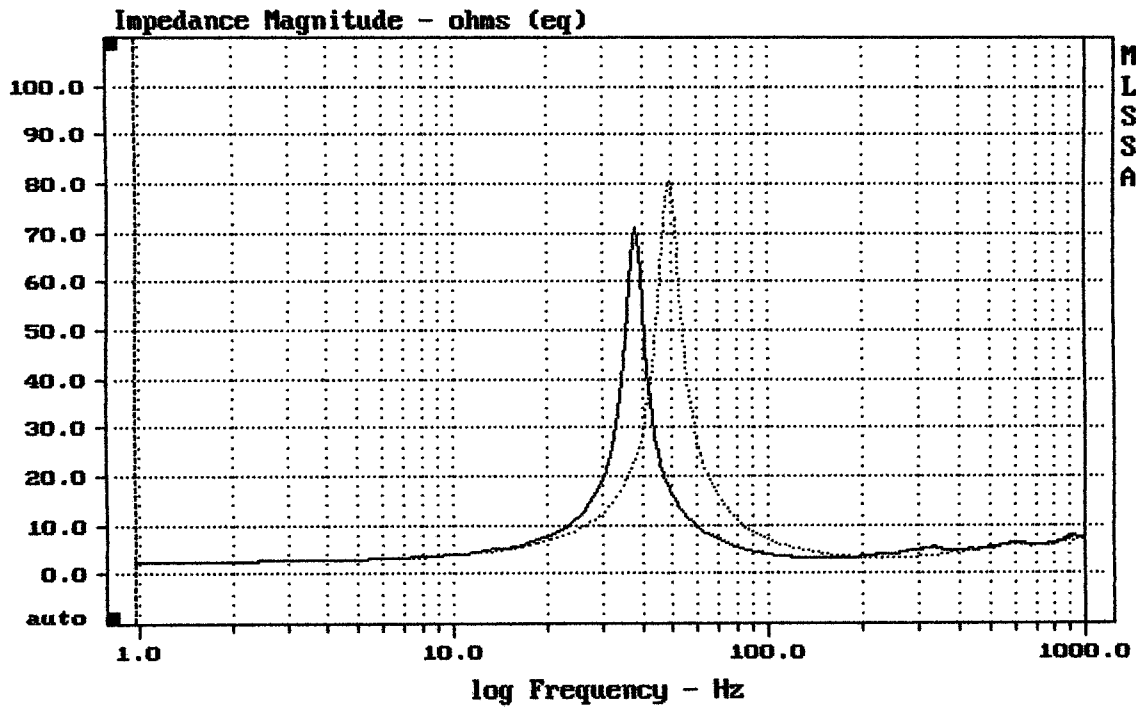

mean: 6.715, rms: 9.94, std: 7.329, max: 88.54, min: 2.526

DT10

MLSSA: Frequency Domain