


Level (100:2752 Hz) = 96.92 dB SPL/watt (16 ohms, @1.50 meters)

PD184/16

MLSSA: Frequency Domain

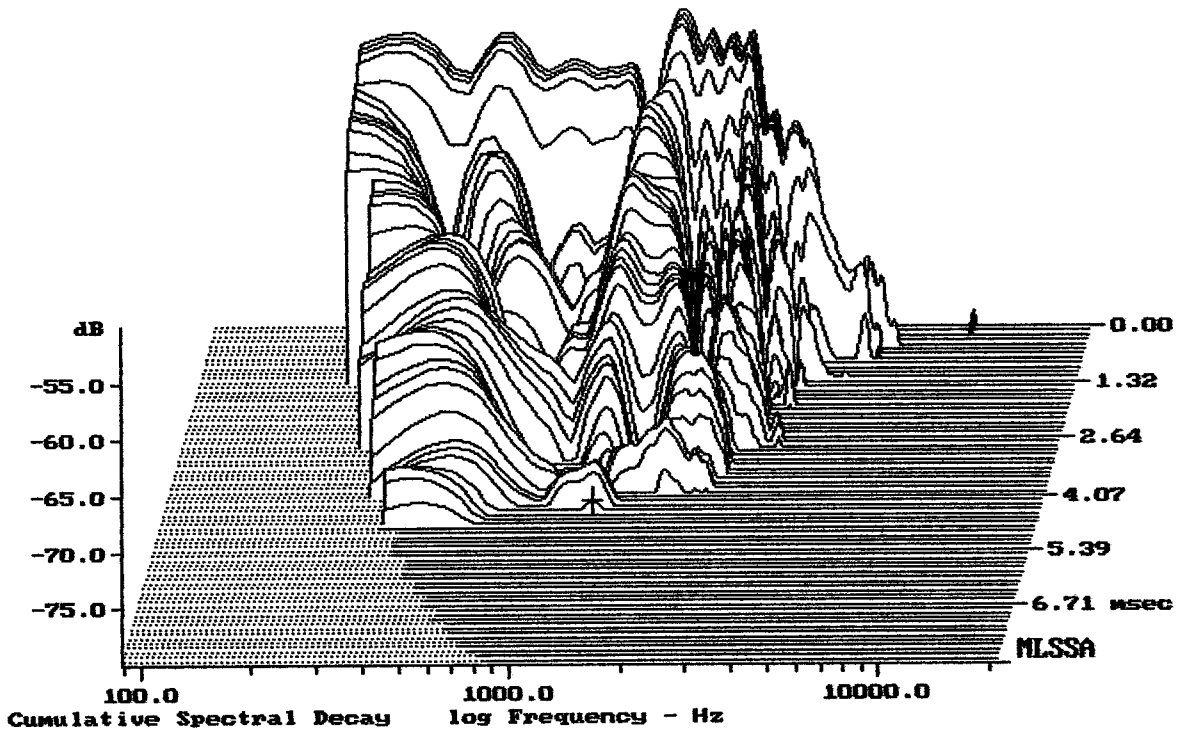

-79.11 dB, 1287 Hz (29), 4.400 msec (41)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.67	Ohms
2	Fs	38.08	Hz
3	Re	13.30	Ohms[dc]
4	Res	412.49	Ohms
5	Qms	12.23	
6	Qes	0.39	
7	Qts	0.38	
8	L1	2.45	mH
9	L2	4.54	mH
10	R2	17.73	Ohms
11	RMSE-load	1.64	Ohms
12	Vas(Sd)	234.77	liters
13	Mms	141.62	grams
14	Cms	123	μ M/Newton
15	B1	33.81	Tesla-M
16	SPLref(Sd)	97.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1164.16 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.9% (-20% to -50% is recommended).

PD184/16

MLSSA: Parameters

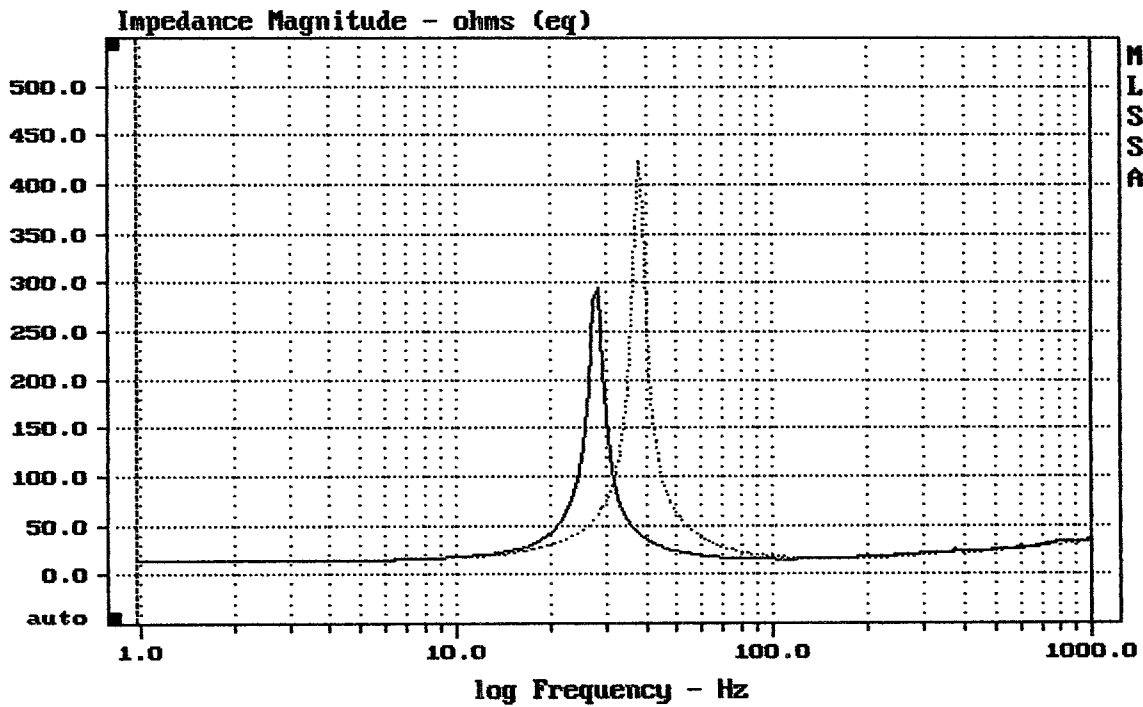

mean: 28.57, rms: 38.66, std: 26.03, max: 423.7, min: 13.33

PD184/16

MLSSA: Frequency Domain