



Sensitivity Magnitude - dB SPL/watt (8 ohms, @1.00 meters)

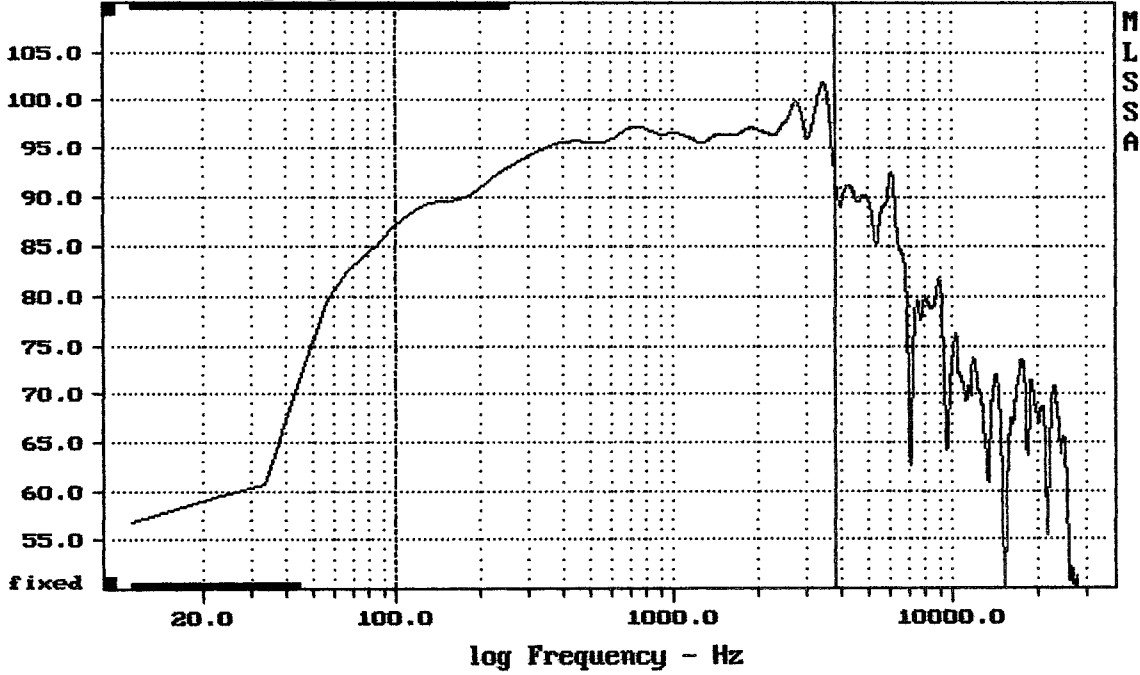

Level (100:3829 Hz) = 95.62 dB SPL/watt (8 ohms, @1.00 meters)

MB10N305

MLSSA: Frequency Domain

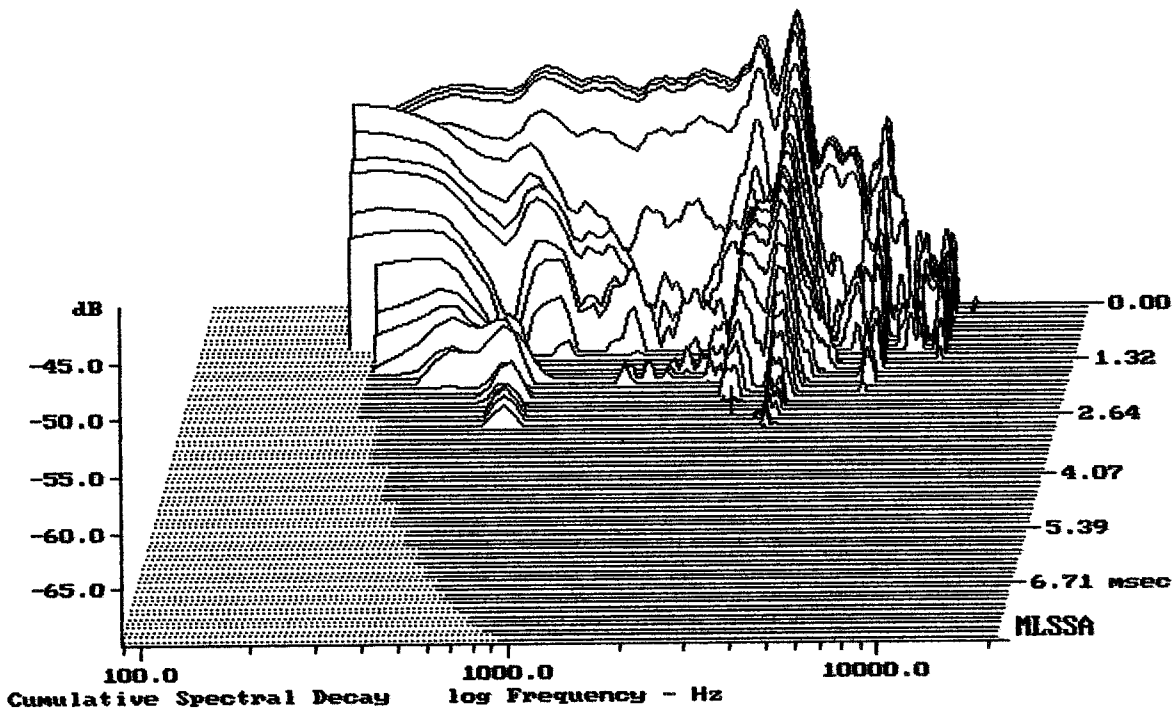

-69.93 dB, 2663 Hz (60), 2.310 msec (22)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.44	Ohms
2	Fs	62.39	Hz
3	Re	5.60	Ohms[dc]
4	Res	167.29	Ohms
5	Qms	7.19	
6	Qes	0.24	
7	Qts	0.23	
8	L1	0.63	mH
9	L2	1.12	mH
10	R2	4.15	Ohms
11	RMSE-load	0.39	Ohms
12	Vas(Sd)	29.23	liters
13	Mms	37.51	grams
14	Cms	173	$\mu\text{M}/\text{Newton}$
15	B1	18.50	Tesla-M
16	SPLref(Sd)	96.5	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.3% (-20% to -50% is recommended).

MB10N305

MLSSA: Parameters

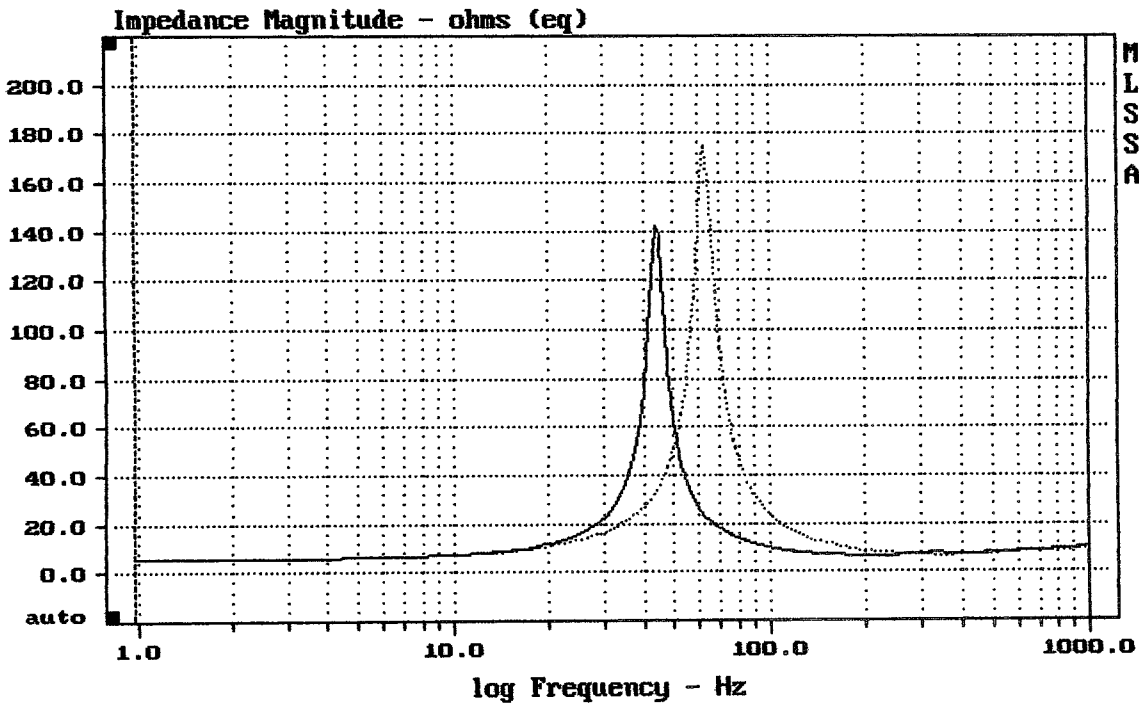

mean: 12.33, rms: 21.24, std: 17.3, max: 174.9, min: 5.756

MB10N305

MLSSA: Frequency Domain