


mean: 93.33, rms: 95.32, std: 4.92, max: 106.13, min: 66.59

PL8X + TRAF0


MLSSA: Frequency Domain

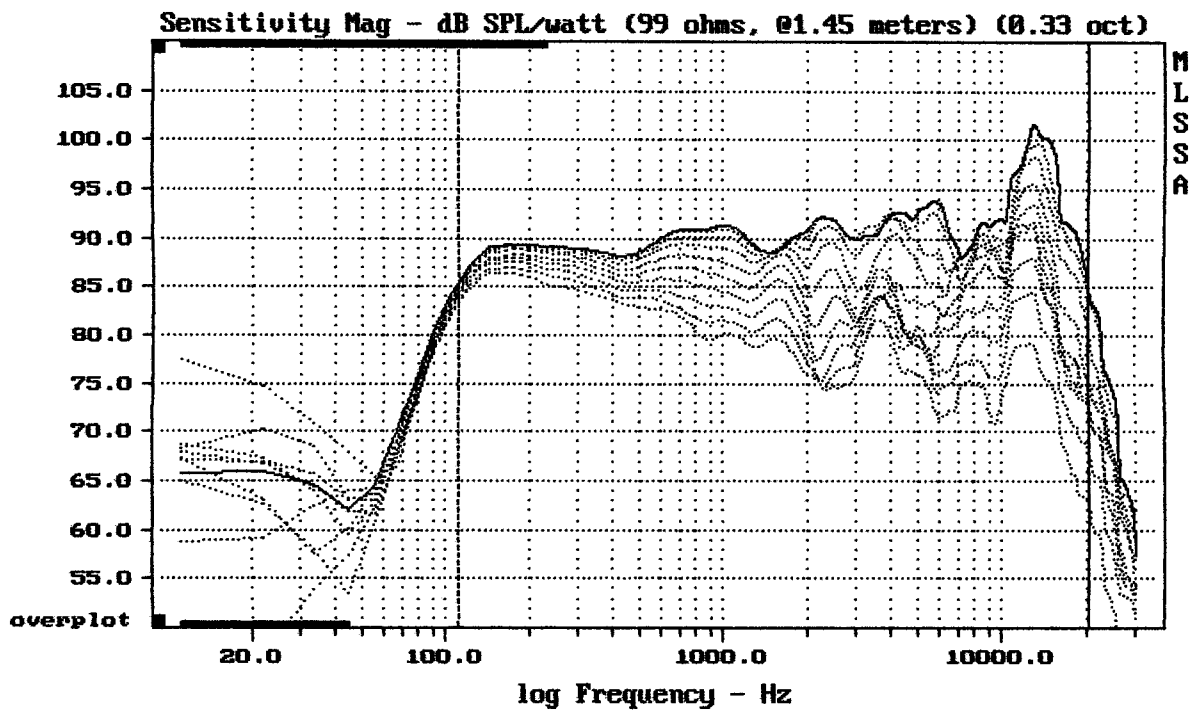

Overlay Compare: dev= +17/-7.3, std= 5.3, avg= -19

PL8X + TRAF0


MLSSA: Frequency Domain

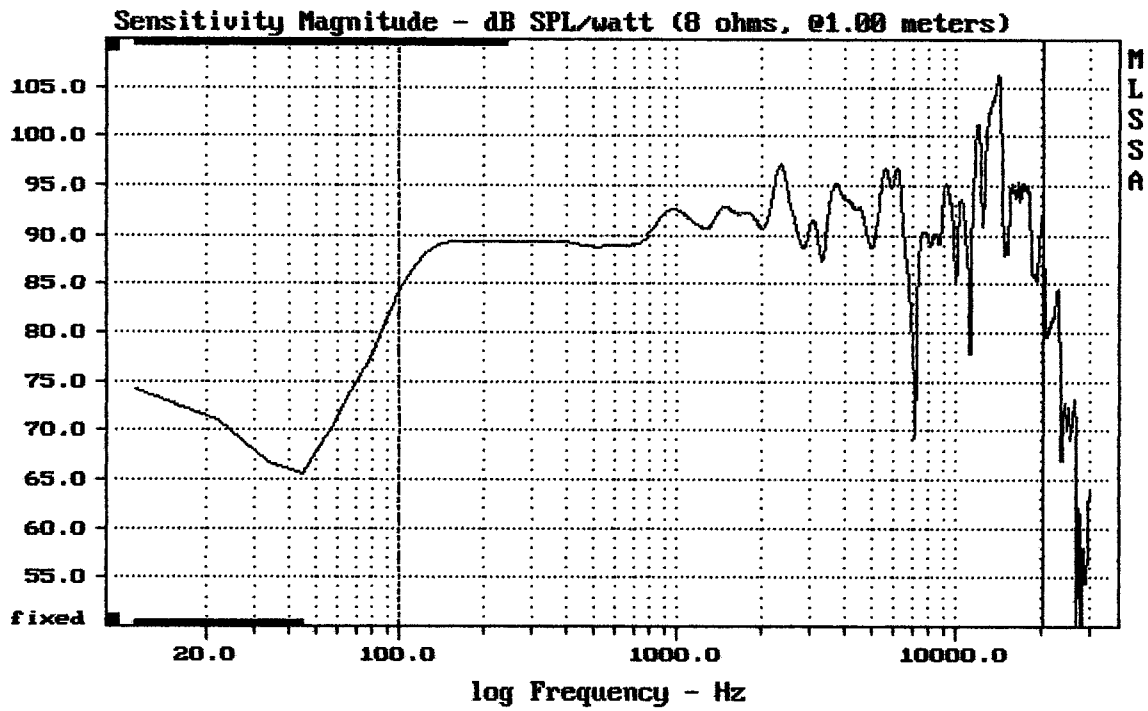

Level (100:20500 Hz) = 92.96 dB SPL/watt (8 ohms, @1.00 meters)


PL8X

MLSSA: Frequency Domain

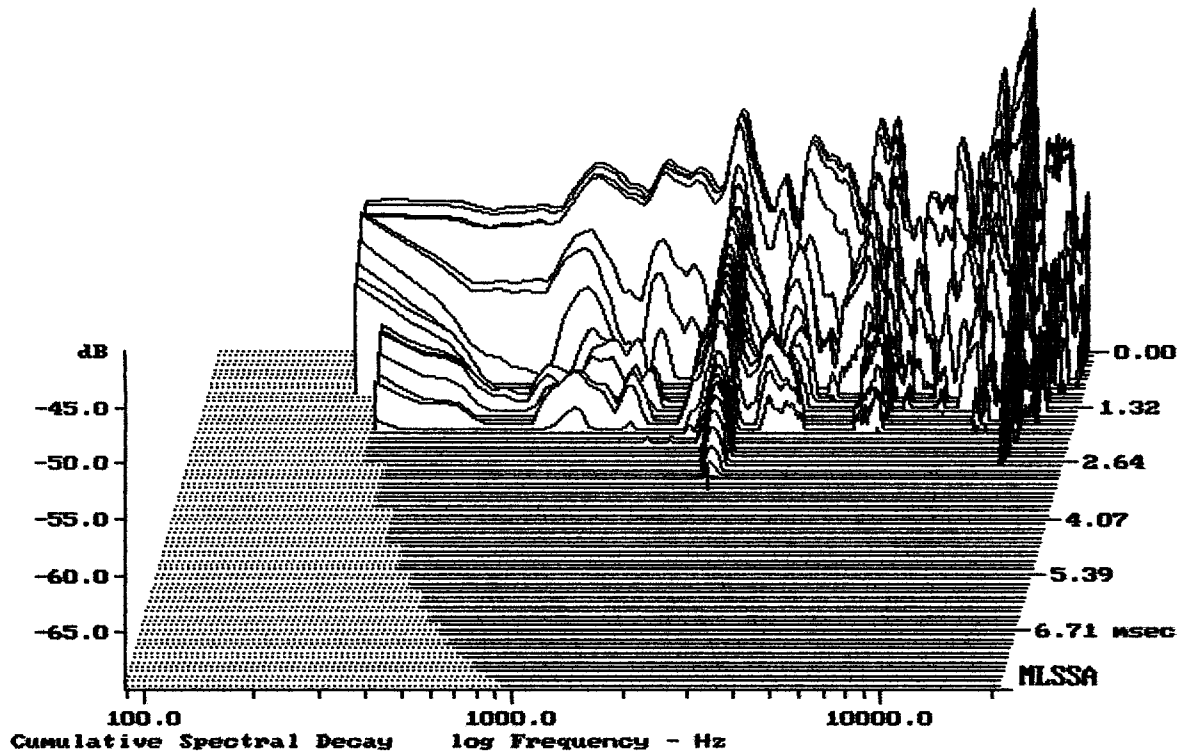

-69.76 dB, 2353 Hz (53), 3.080 msec (29)


DTTO

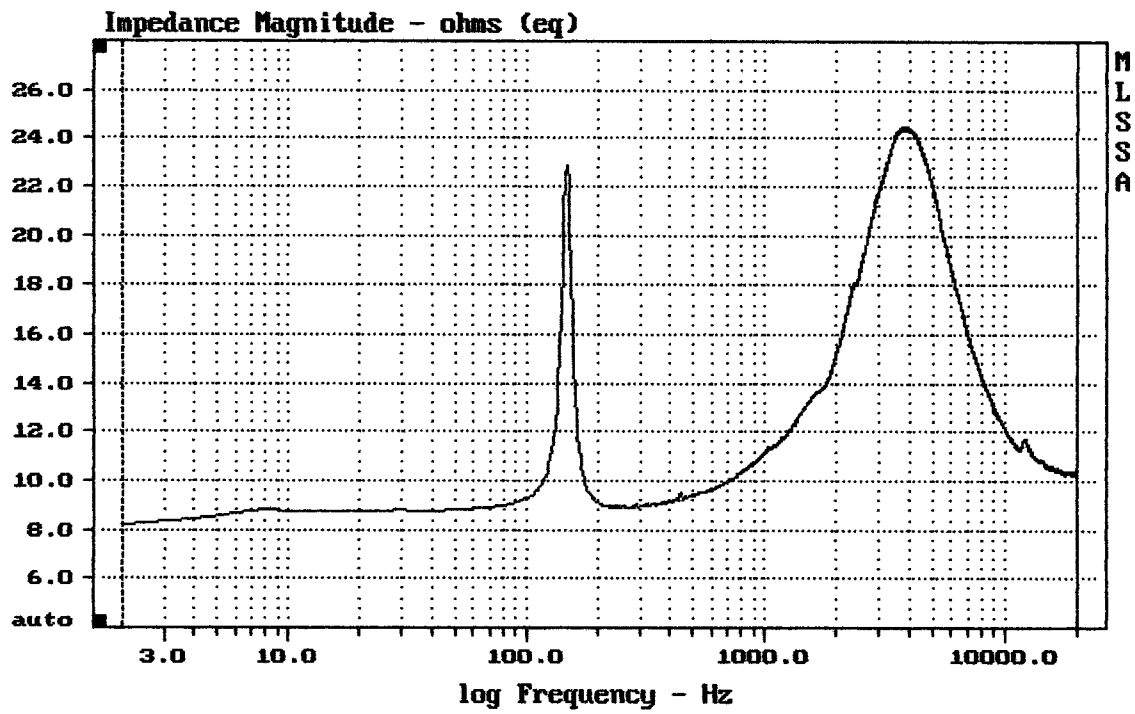

mean: 13.79, rms: 14.48, std: 4.487, max: 24.48, min: 8.171

PL8X

MLSSA: Frequency Domain

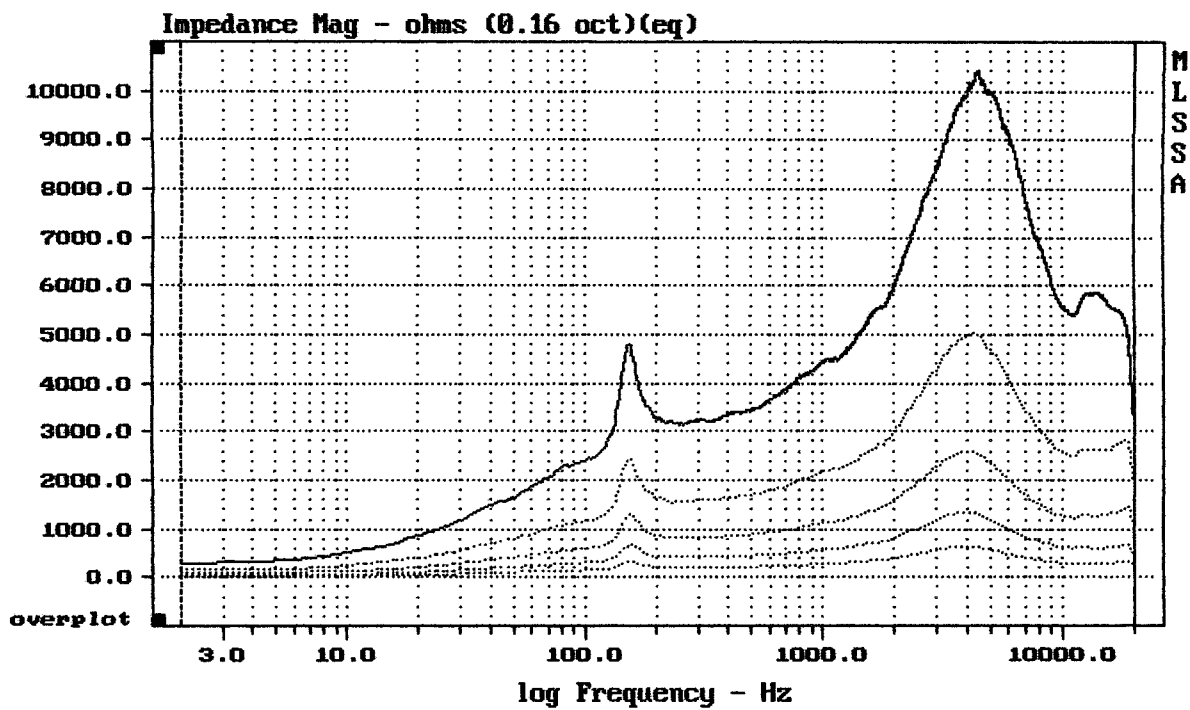

mean: 364.7, rms: 382.5, std: 115.1, max: 658.6, min: 19.93

PL8X

MLSSA: Frequency Domain

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.08	Ohms
2	Fs	147.94	Hz
3	Re	6.44	Ohms[dc]
4	Res	15.15	Ohms
5	Qms	11.04	
6	Qes	4.70	
7	Qts	3.30	
8	L1	-0.15	mH
9	L2	0.93	mH
10	R2	16.84	Ohms
11	RMSE-load	0.13	Ohms
12	Vas(Sd)	10.00	liters
13	Mms	8.37	grams
14	Cms	138	$\mu\text{M}/\text{Newton}$
15	B1	3.27	Tesla-M
16	SPLref(Sd)	90.2	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (10.00 grams)

Area (Sd): 226.98 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.2% (-20% to -50% is recommended).

PL8X

MLSSA: Parameters

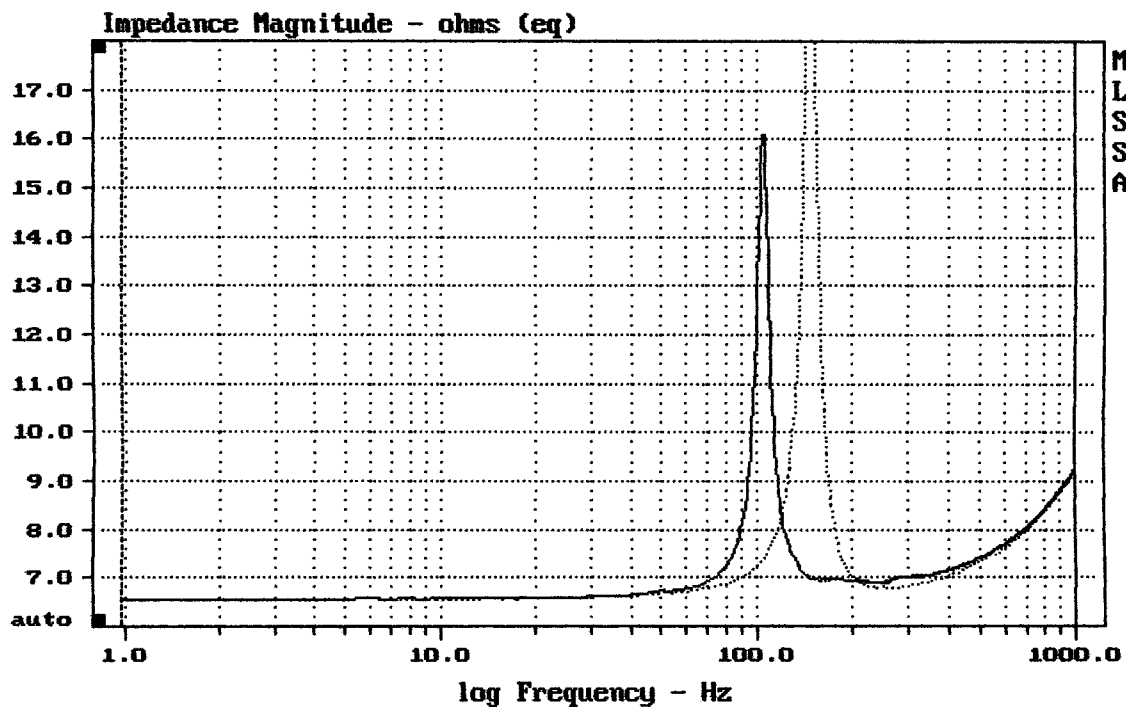

 mean: 7.922, rms: 8.187, std: 1.723, max: 21.87, min: 6.531

DTTO

MLSSA: Frequency Domain