


mean: 97.18, rms: 97.56, std: 2.30, max: 100.80, min: 86.12

ART400-A MKII


MLSSA: Frequency Domain

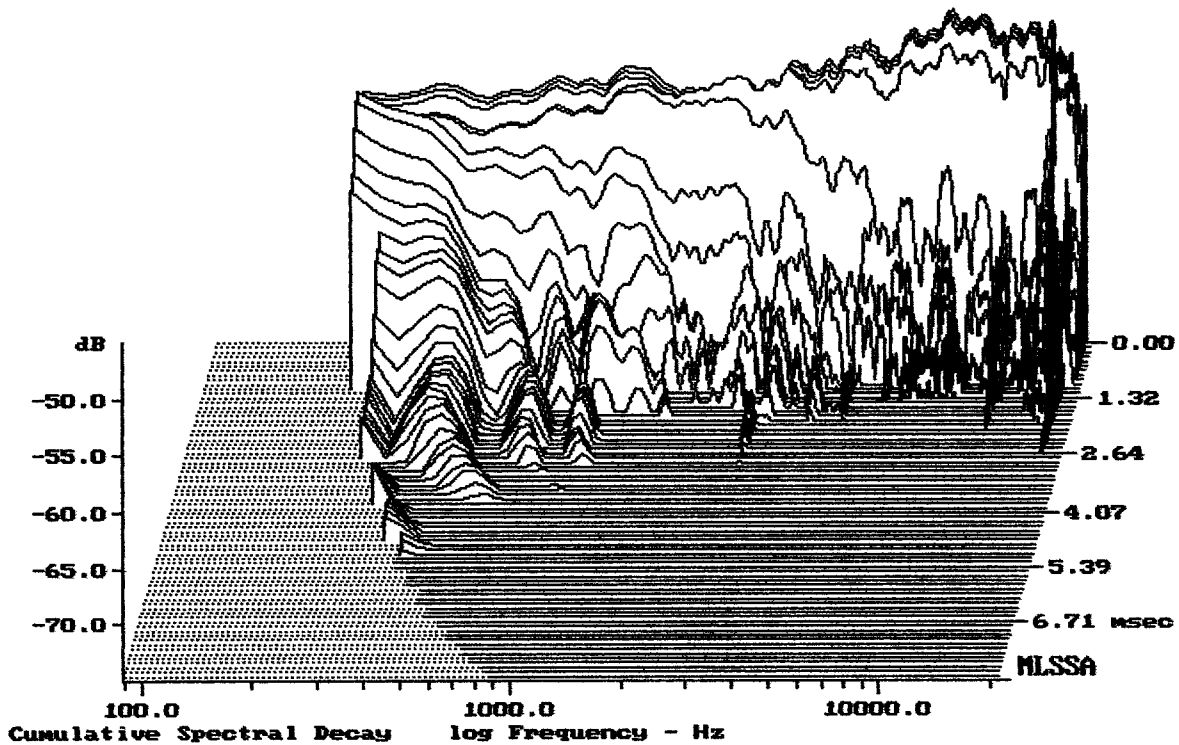

-74.65 dB, 2041 Hz (64), 2.530 msec (24)

DTTO

Step Response - volts

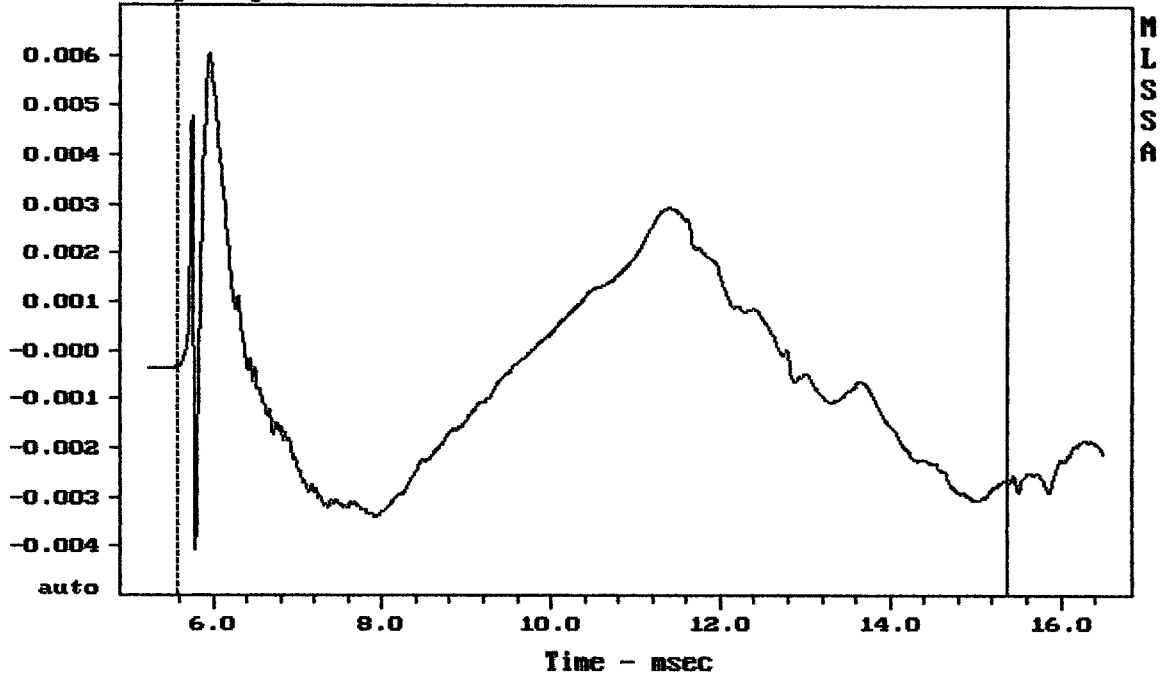


mean: -0.0005539, rms: 0.002086, std: 0.002011, max: 0.006014, min: -0.00406

ART408-A MKII

MLSSA: Time Domain


Sensitivity Magnitude - dB SPL/watt (4 ohms, @1.45 meters)

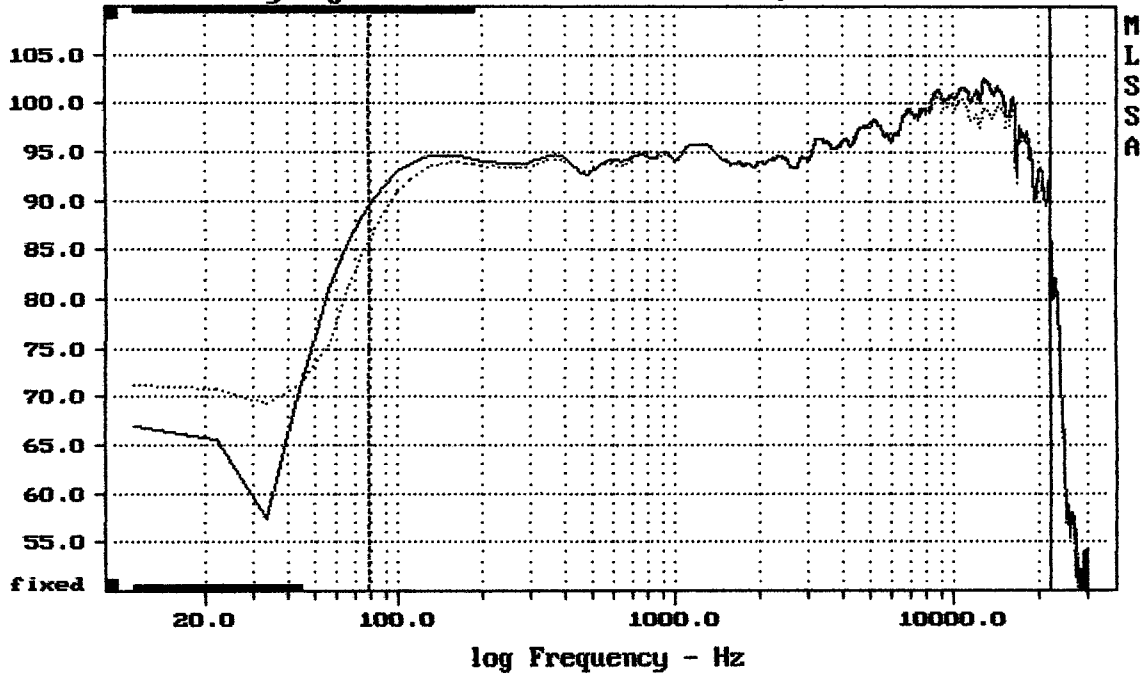

Overlay Compare: dev= +2.8/-1, std= 0.87, avg= 0.69

ART408-A MKII


MLSSA: Frequency Domain

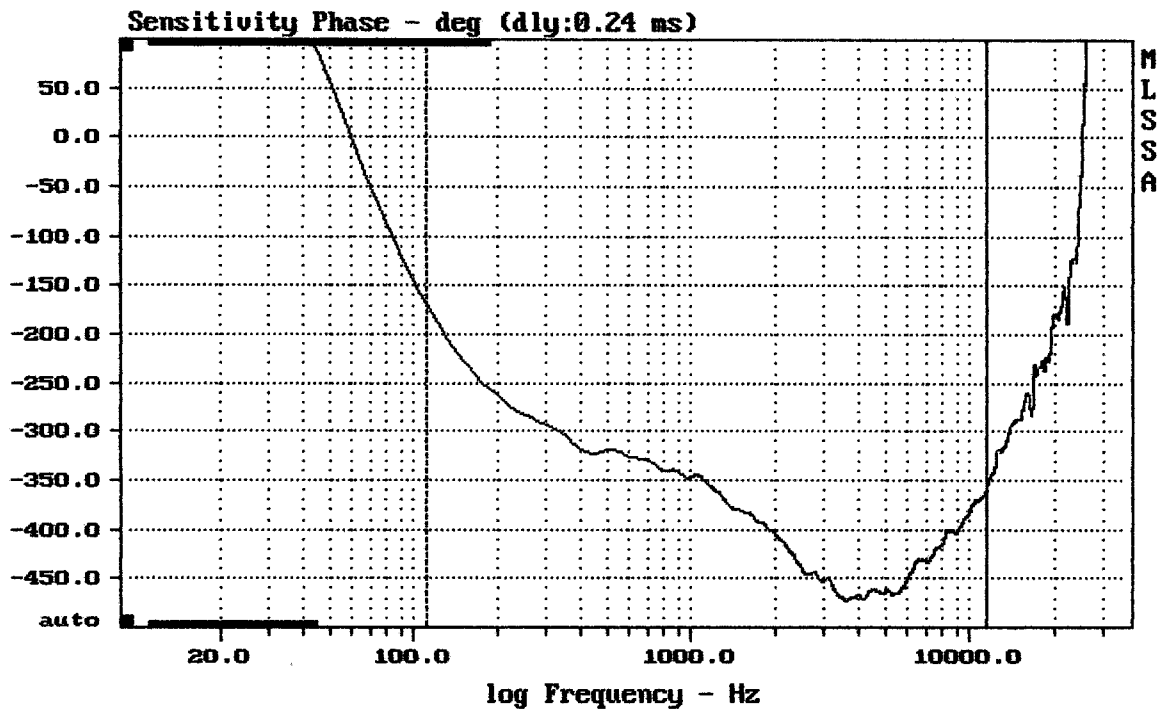

mean: -412, rms: 414.6, std: 46.39, max: -168.5, min: -472.6

ART408-A MKII

MLSSA: Frequency Domain

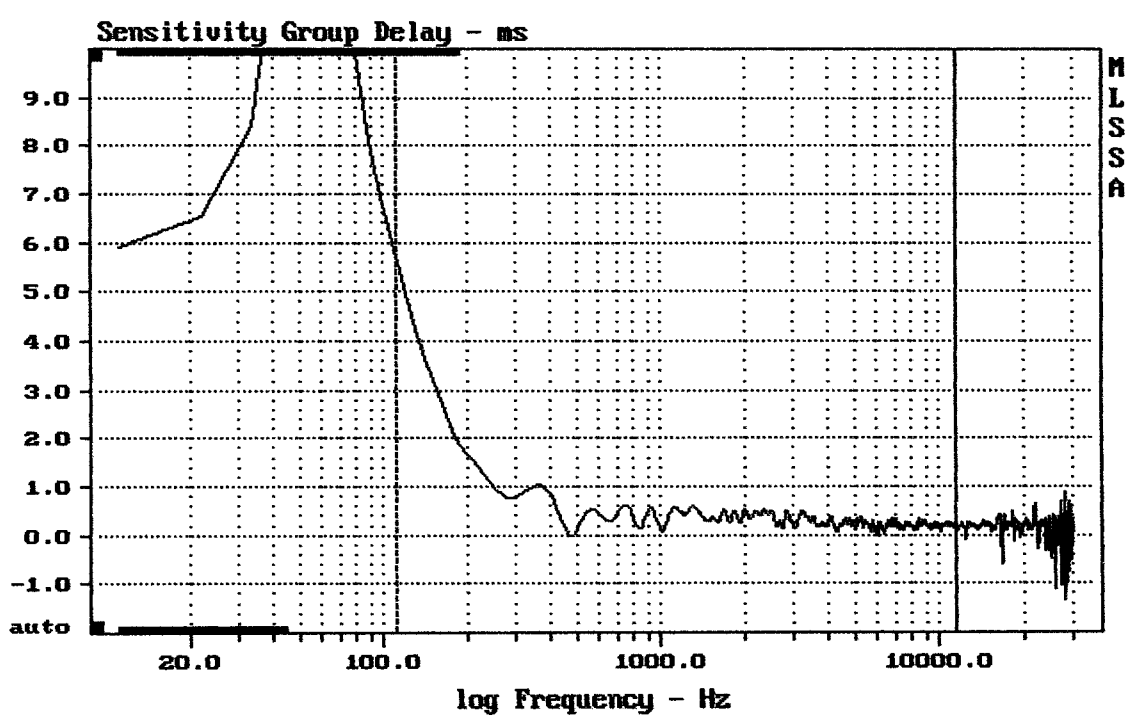


mean: 0.2932, rms: 0.4513, std: 0.3431, max: 5.715, min: -0.01435

ART408-A MKII

MLSSA: Frequency Domain

Sensitivity Mag - dB SPL/watt (4 ohms, @1.45 meters) (0.33 oct)

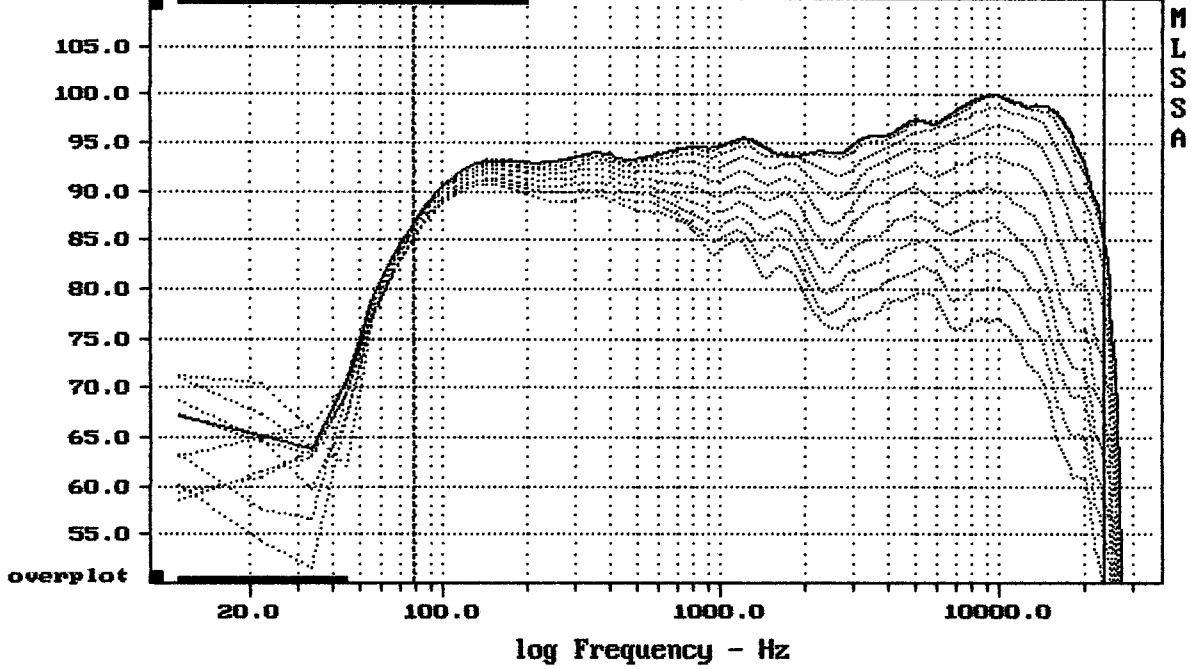


Overlay Compare: dev= +24/-11, std= 7.9, avg= -25

ART408-A MKII

MLSSA: Frequency Domain

Sensitivity Mag - dB SPL/watt (4 ohms, @1.45 meters) (0.33 oct)

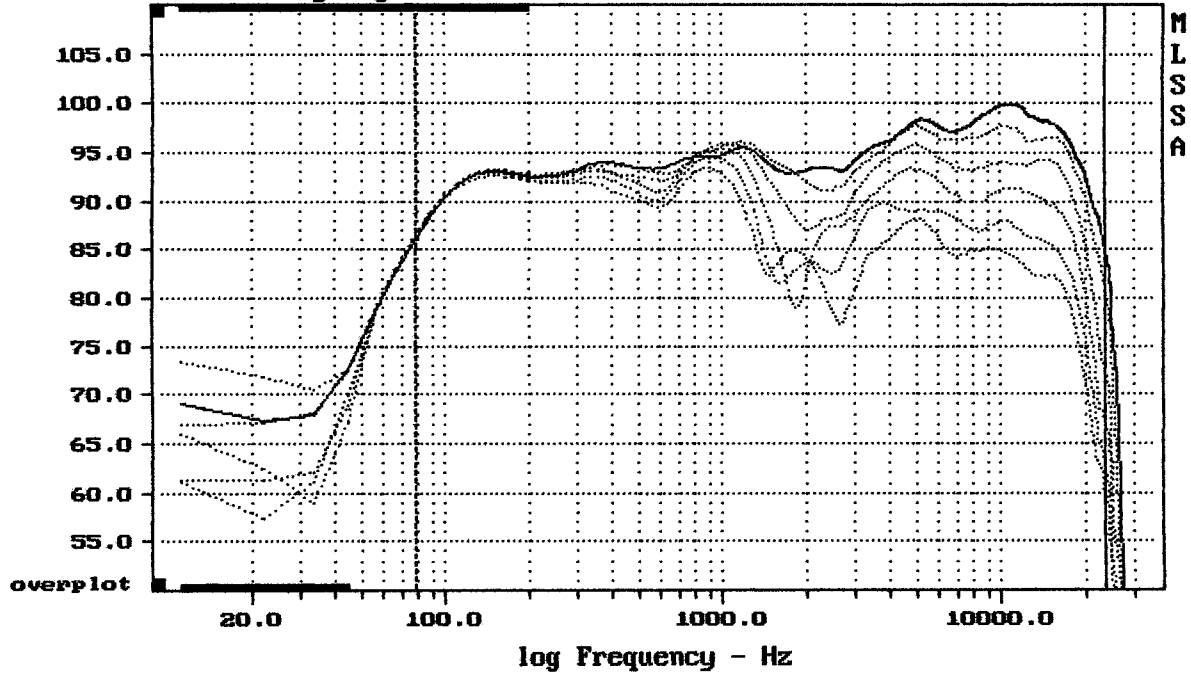


Overlay Compare: dev= +16/-10, std= 5.2, avg= -15

ART408-A MKII

MLSSA: Frequency Domain

Sensitivity Mag - dB SPL/watt (4 ohms, @1.45 meters) (0.33 oct)

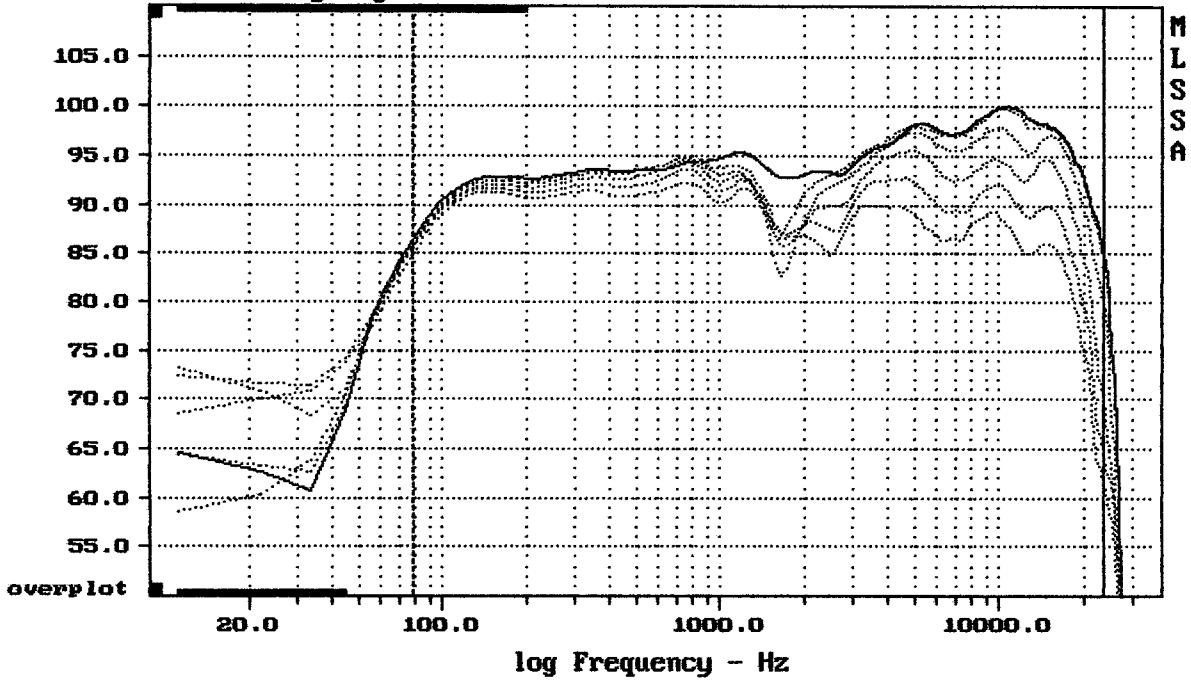


Overlay Compare: dev= +11/-12, std= 5.1, avg= -12

ART408-A MKII

MLSSA: Frequency Domain


Sensitivity Mag - dB SPL/watt (4 ohms, @1.75 meters) (0.33 oct)

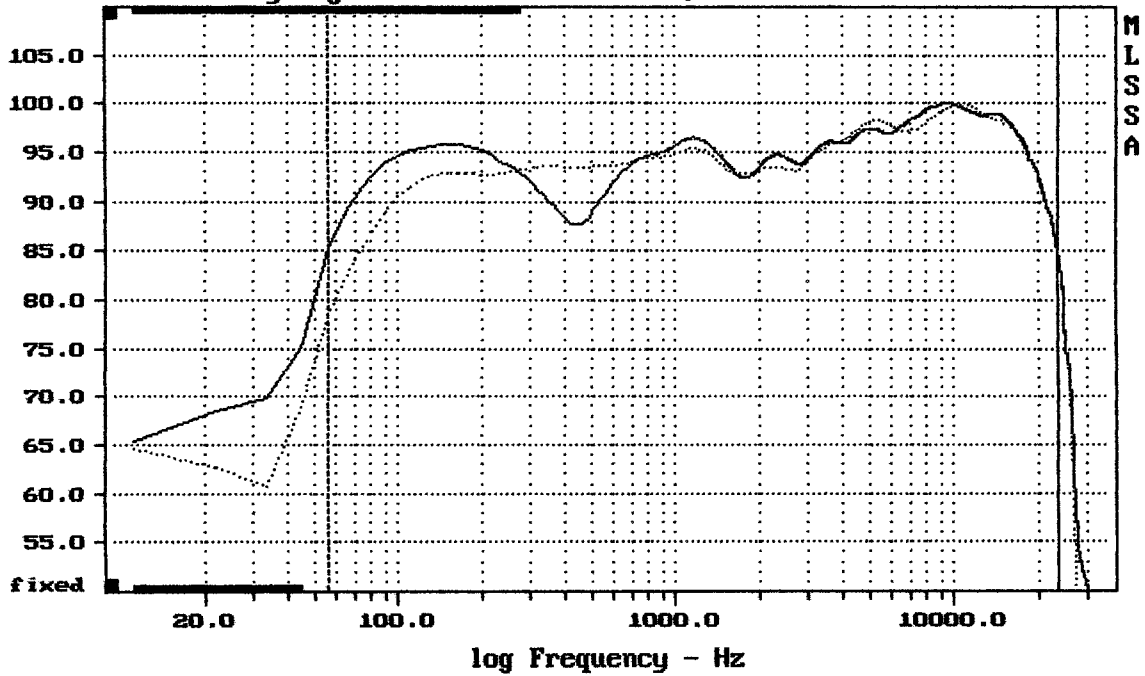

Overlay Compare: dev= +6.8/-5.8, std= 0.81, avg= 0.1

ART408-A MKII


MLSSA: Frequency Domain

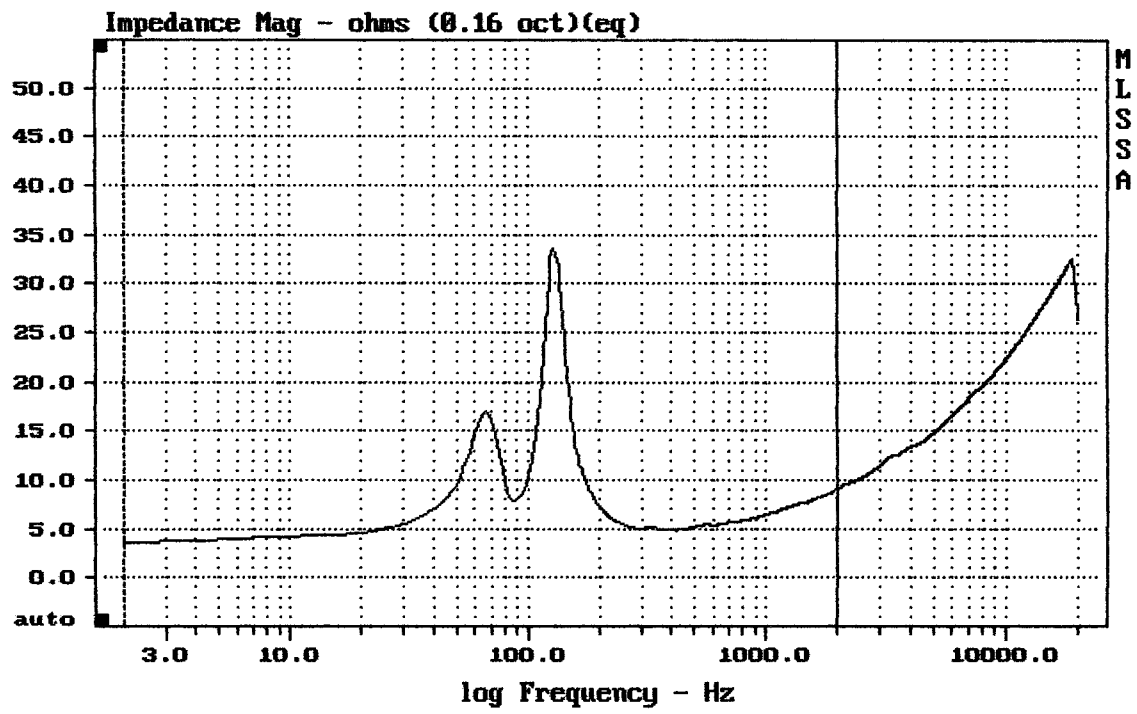


mean: 7.431, rms: 8.148, std: 3.341, max: 33.56, min: 3.581

ART408-A MKII

MLSSA: Frequency Domain

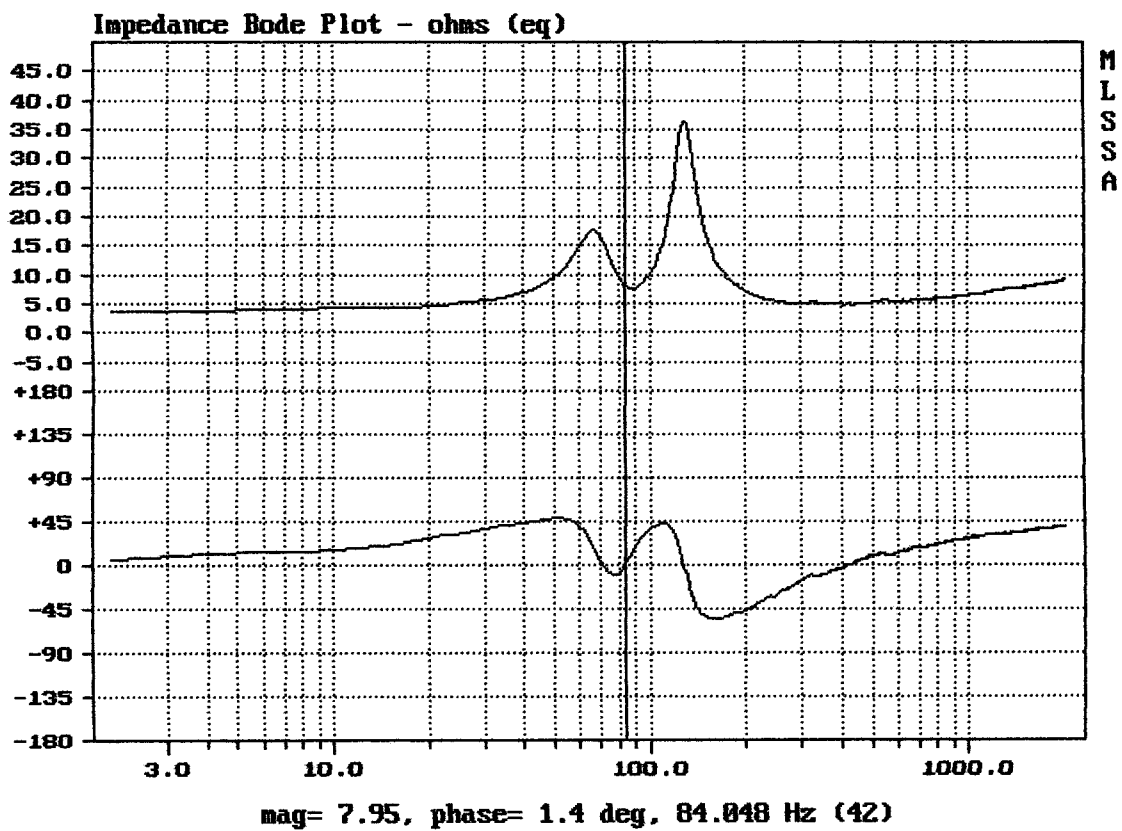


DTTO

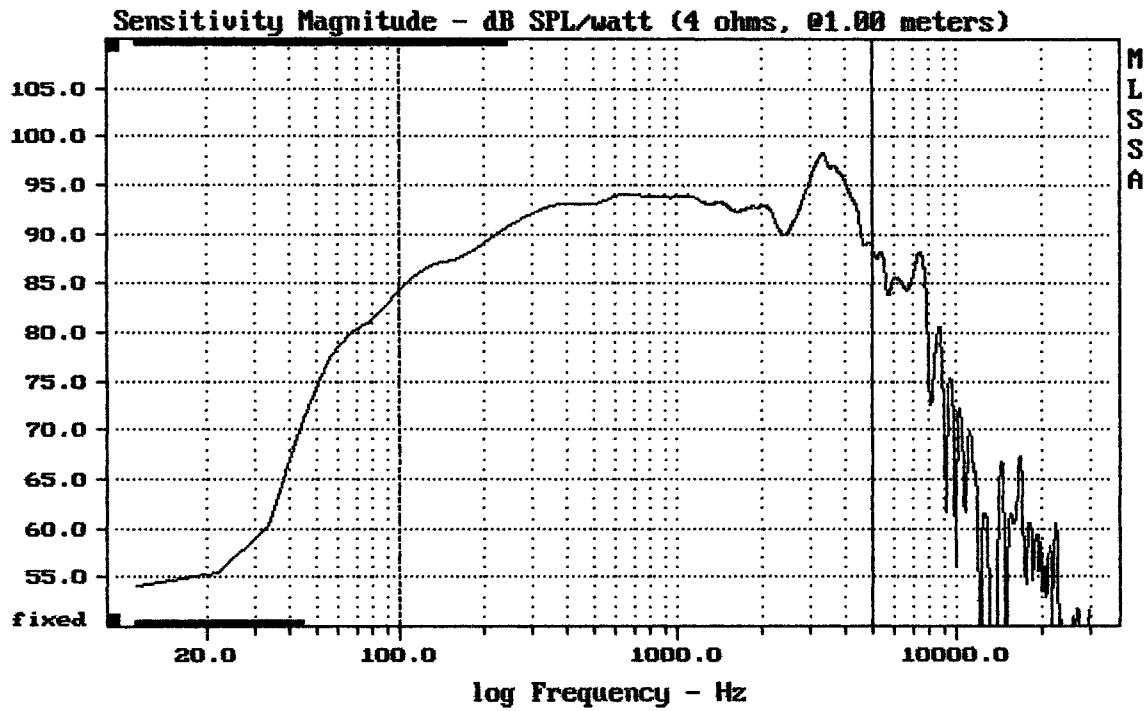

Level (100:5005 Hz) = 92.72 dB SPL/watt (4 ohms, @1.00 meters)

ART 408-A MK II

MLSSA: Frequency Domain

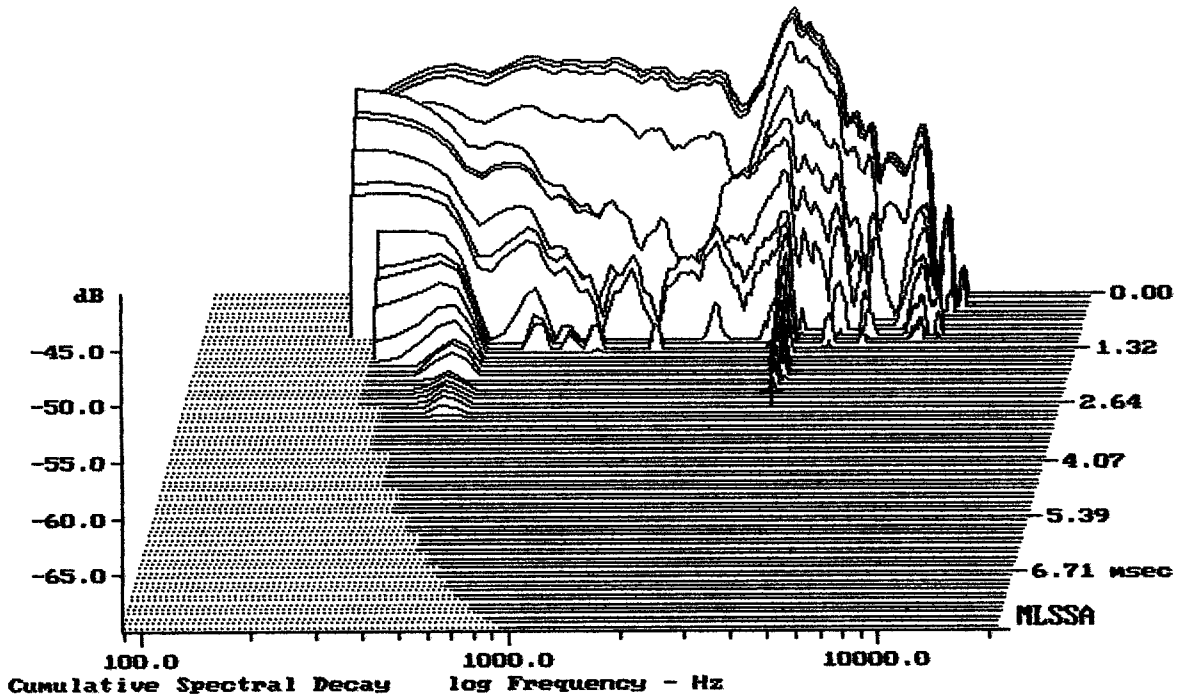

-69.88 dB, 3418 Hz (77), 2.420 msec (23)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.56	Ohms
2	Fs	99.42	Hz
3	Re	3.10	Ohms[dc]
4	Res	48.12	Ohms
5	Qms	5.16	
6	Qes	0.33	
7	Qts	0.31	
8	L1	0.45	mH
9	L2	0.85	mH
10	R2	2.17	Ohms
11	RMSE-load	0.16	Ohms
12	Vas(Sd)	8.97	liters
13	Mms	19.42	grams
14	Cms	132	μ M/Newton
15	B1	10.63	Tesla-M
16	SPLref(Sd)	96.1	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (40.00 grams)

Area (Sd): 220.00 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -42.1% (-20% to -50% is recommended).

ART 408-A MK II

MLSSA: Parameters

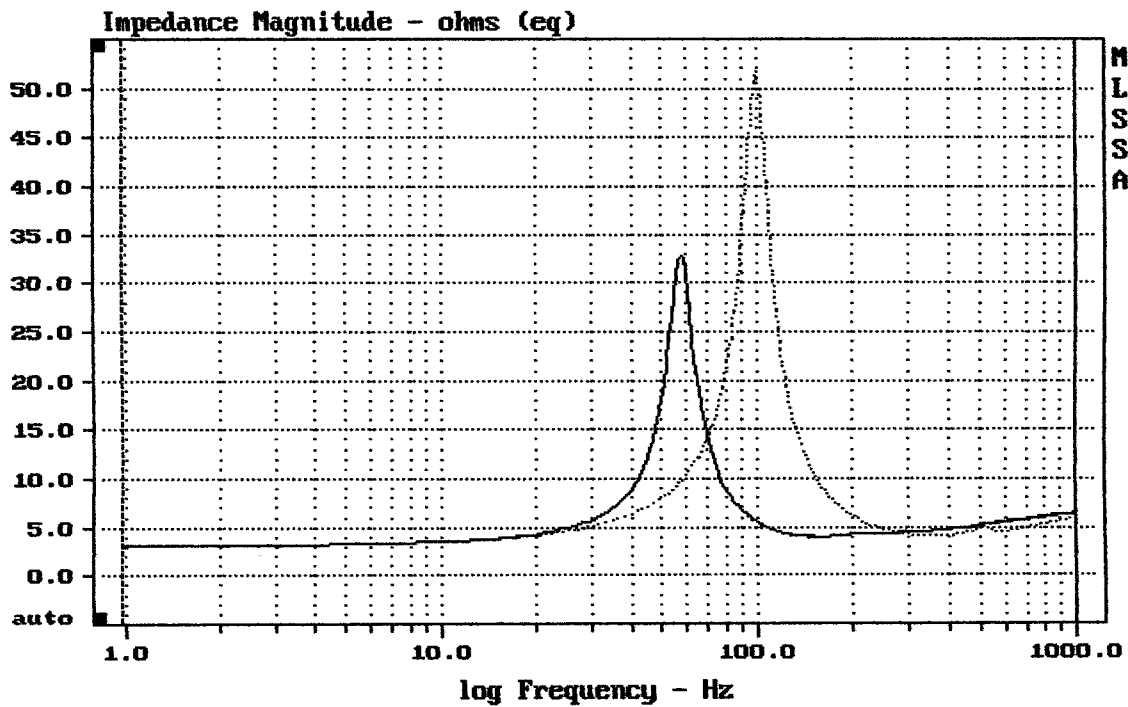

mean: 6.868, rms: 9.618, std: 6.734, max: 51.76, min: 3.229

DITO

MLSSA: Frequency Domain