


Level (78:18499 Hz) = 98.54 dB SPL/watt (8 ohms, @1.60 meters)


M1201

MLSSA: Frequency Domain

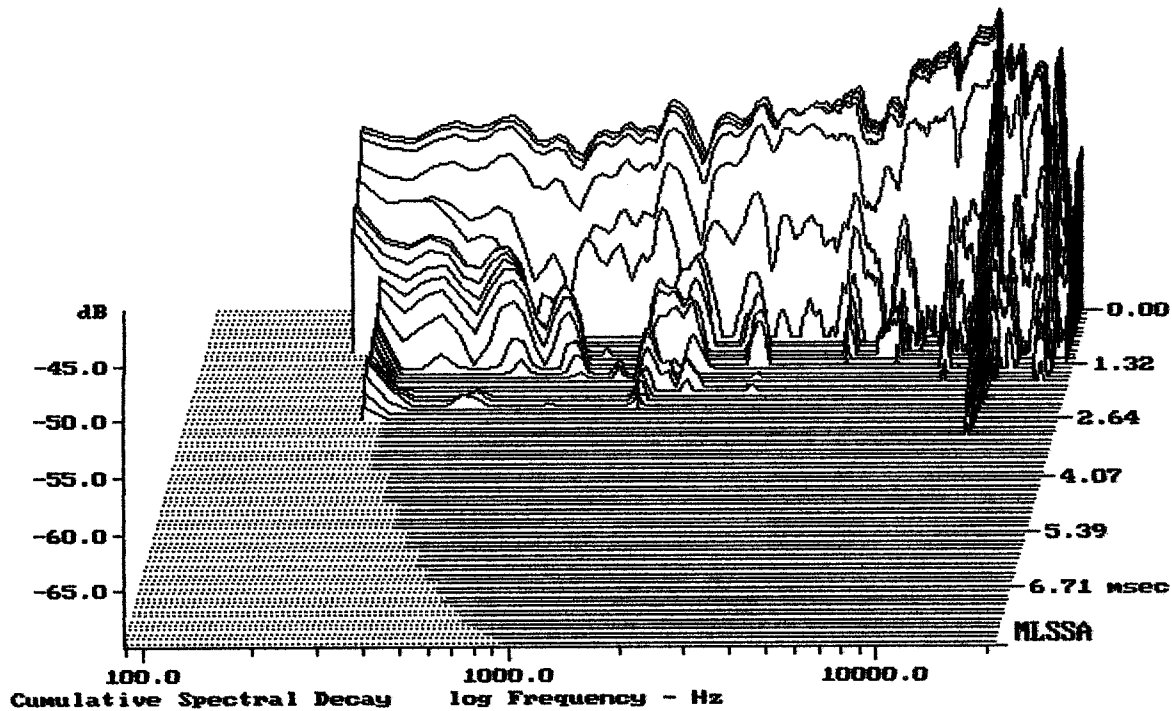

-69.03 dB, 1465 Hz (33), 2.310 msec (22)


DT0

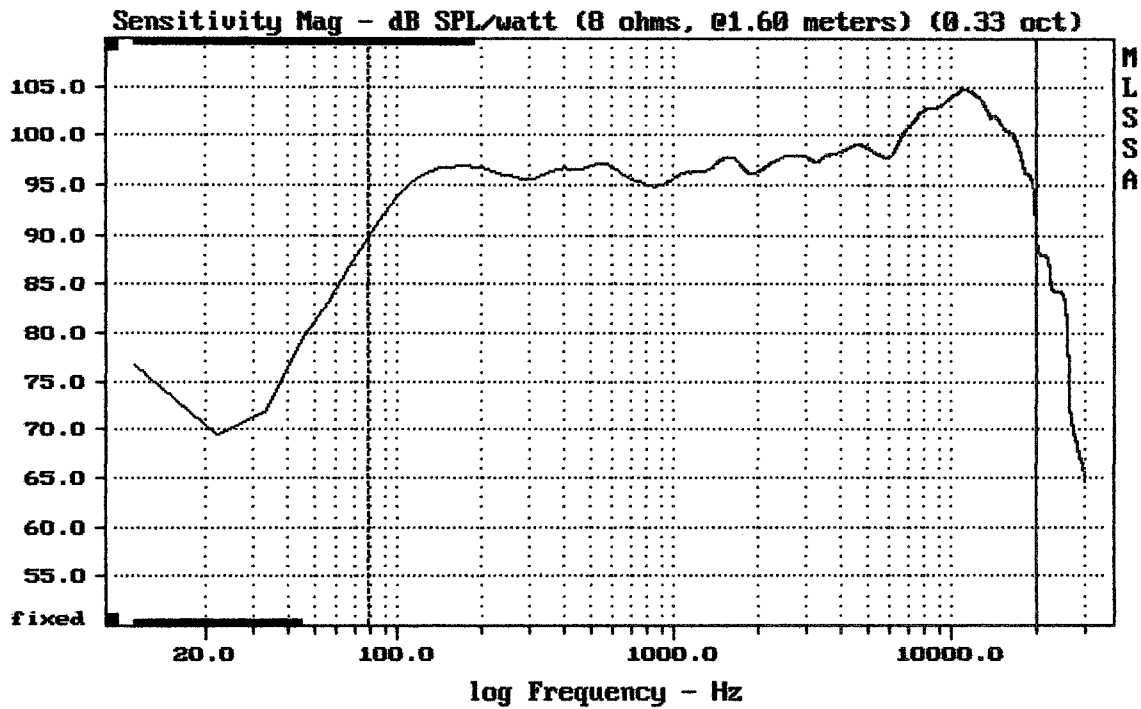

mean: 100.49, rms: 100.97, std: 2.54, max: 104.89, min: 89.74

M1201


MLSSA: Frequency Domain

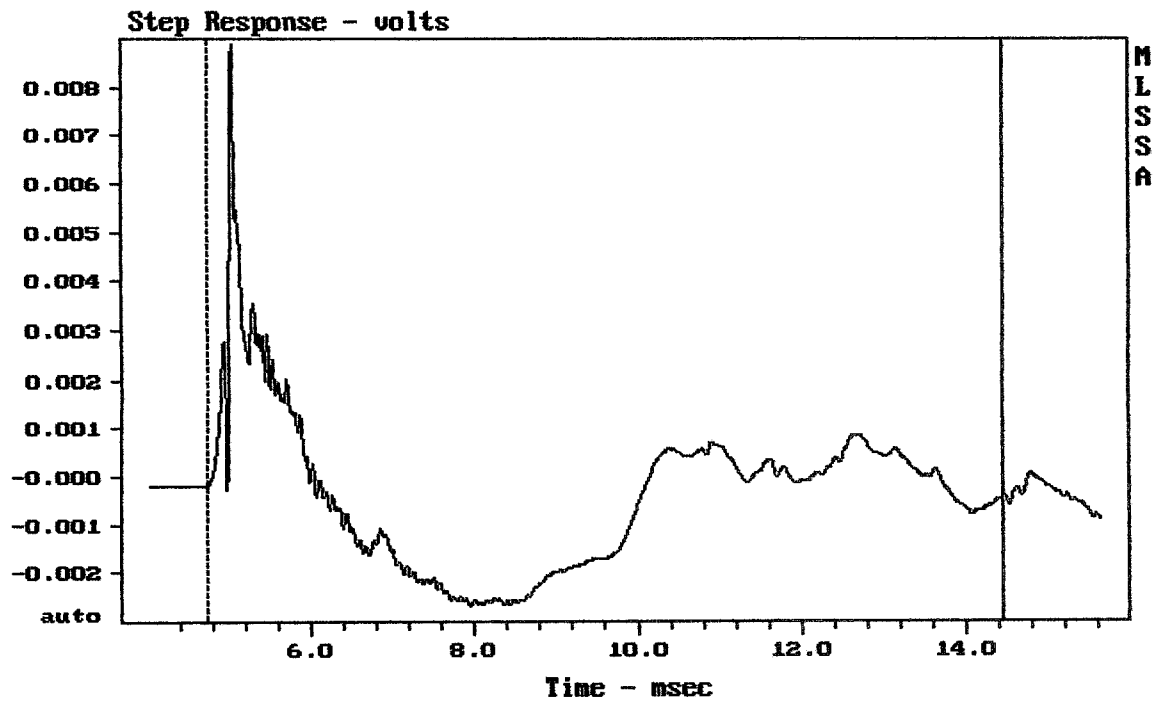

mean: -0.0003988, rms: 0.001625, std: 0.001575, max: 0.008873, min: -0.002671

M1201


MLSSA: Time Domain

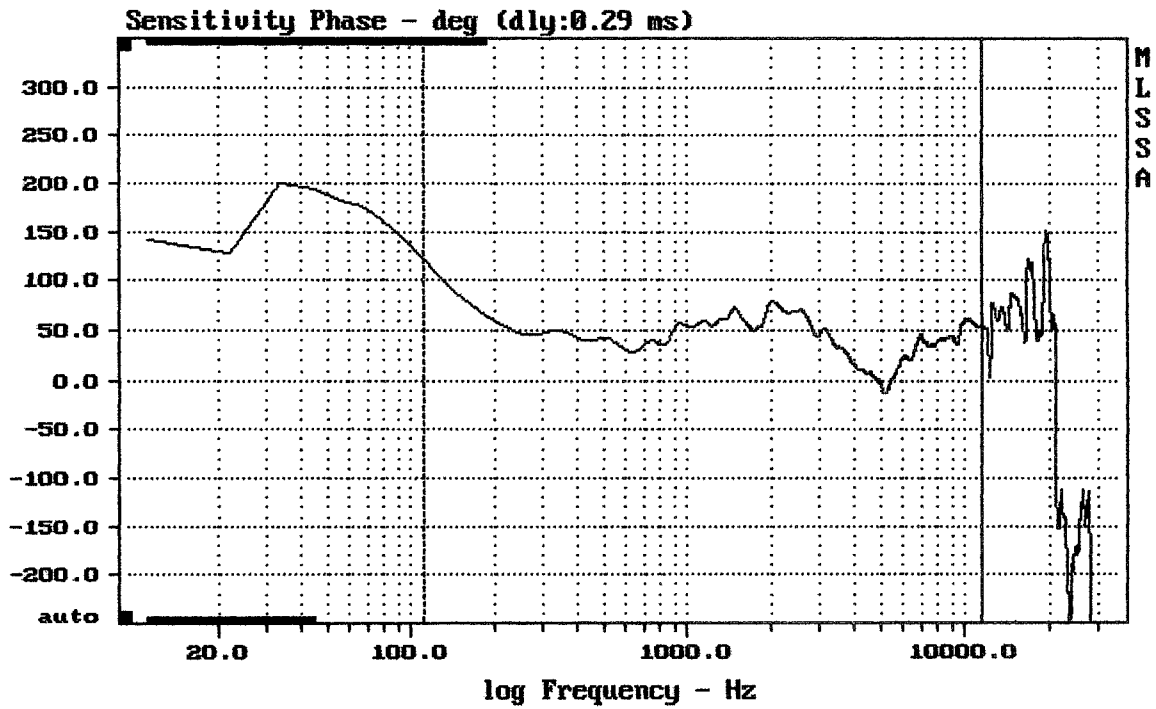

mean: 39.67, rms: 44.93, std: 21.09, max: 121.2, min: -12.65

M1201

MLSSA: Frequency Domain

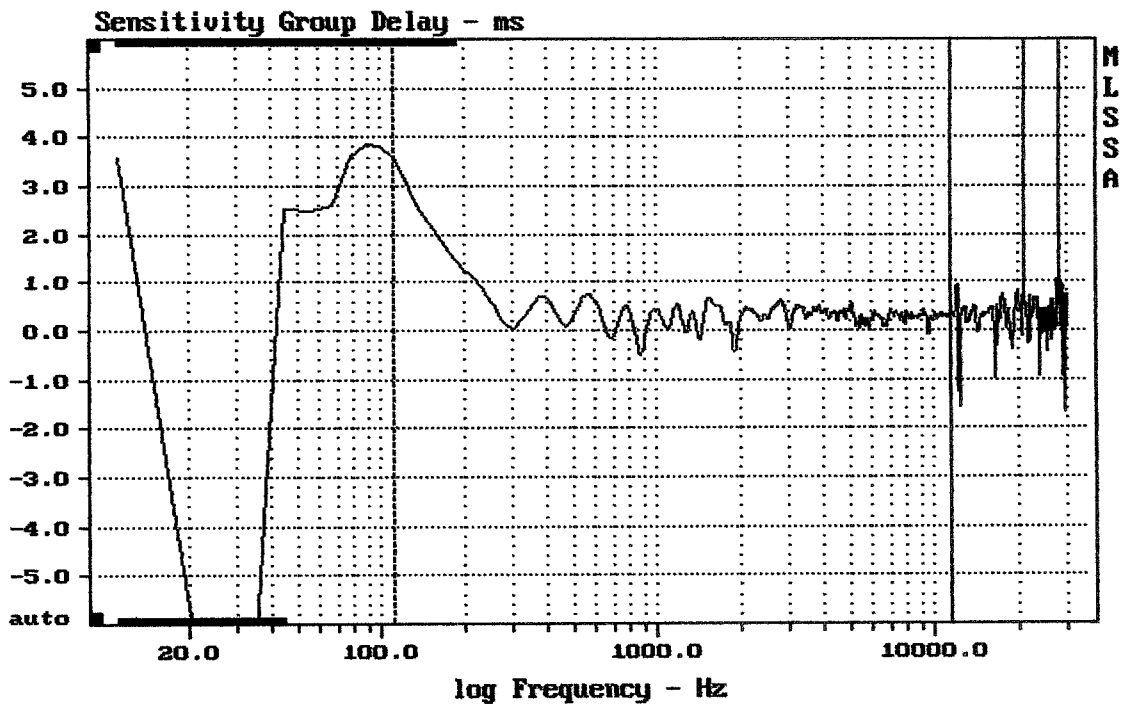


mean: 0.3064, rms: 0.3955, std: 0.2501, max: 3.573, min: -0.5014

M1201

MLSSA: Frequency Domain


Sensitivity Mag - dB SPL/watt (8 ohms, @1.60 meters) (0.33 oct)

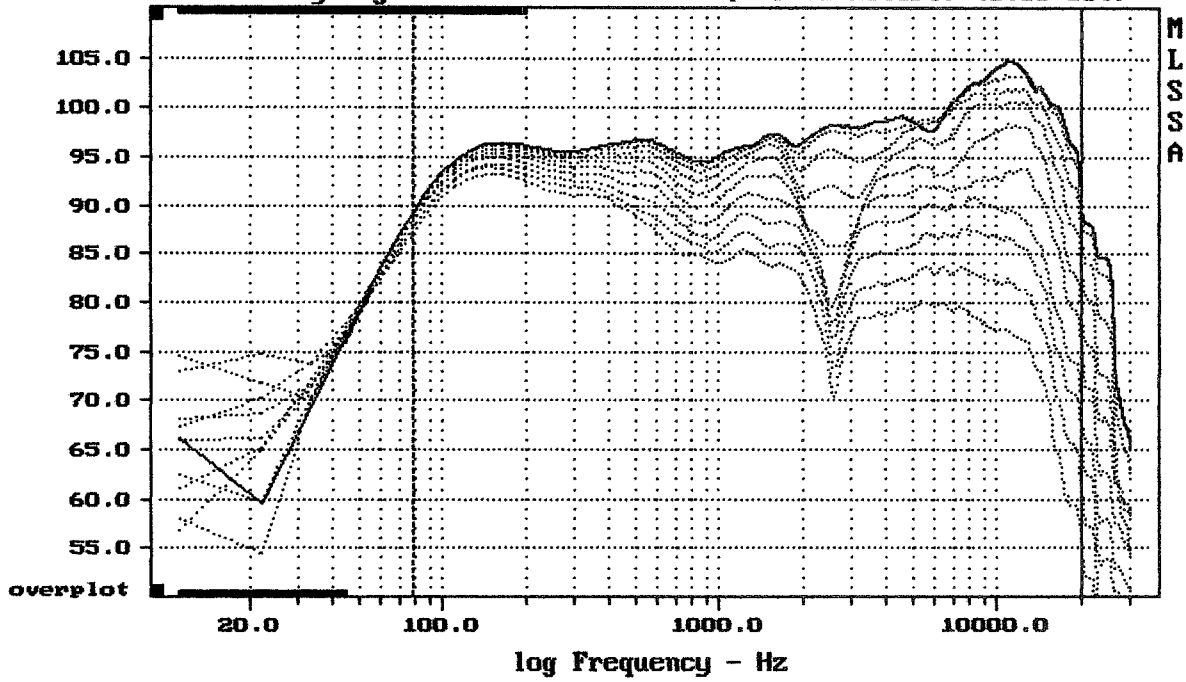

Overlay Compare: dev= +23/-12, std= 7.9, avg= -26

MLSSA: Frequency Domain


Sensitivity Mag - dB SPL/watt (8 ohms, @1.60 meters) (0.33 oct)

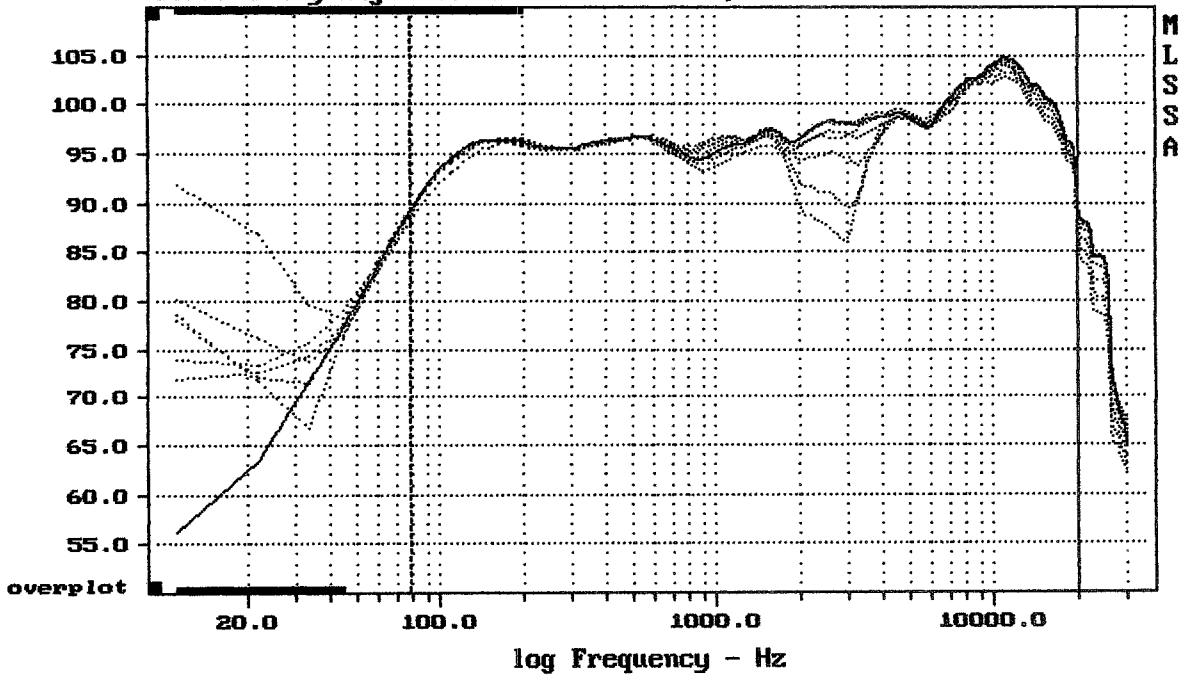

mean: 99.95, rms: 100.42, std: 2.52, max: 104.26, min: 89.33

M1201


MLSSA: Frequency Domain

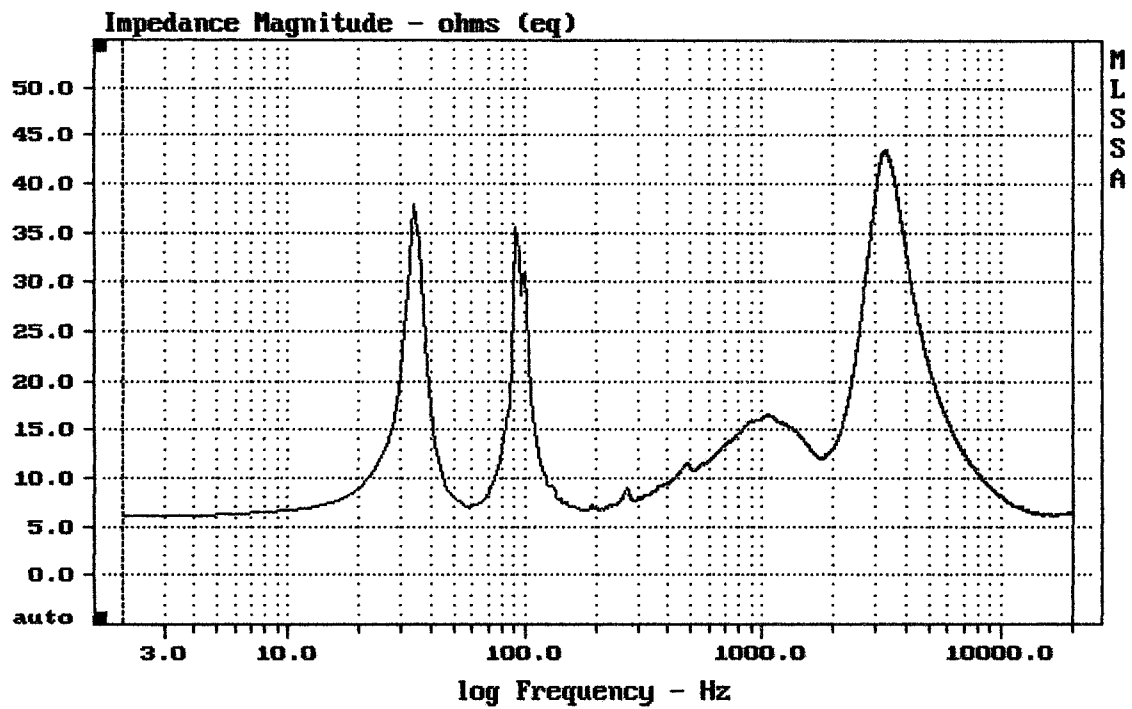


mean: 12.25, rms: 15.2, std: 9.004, max: 43.43, min: 6.073

M1201

MLSSA: Frequency Domain

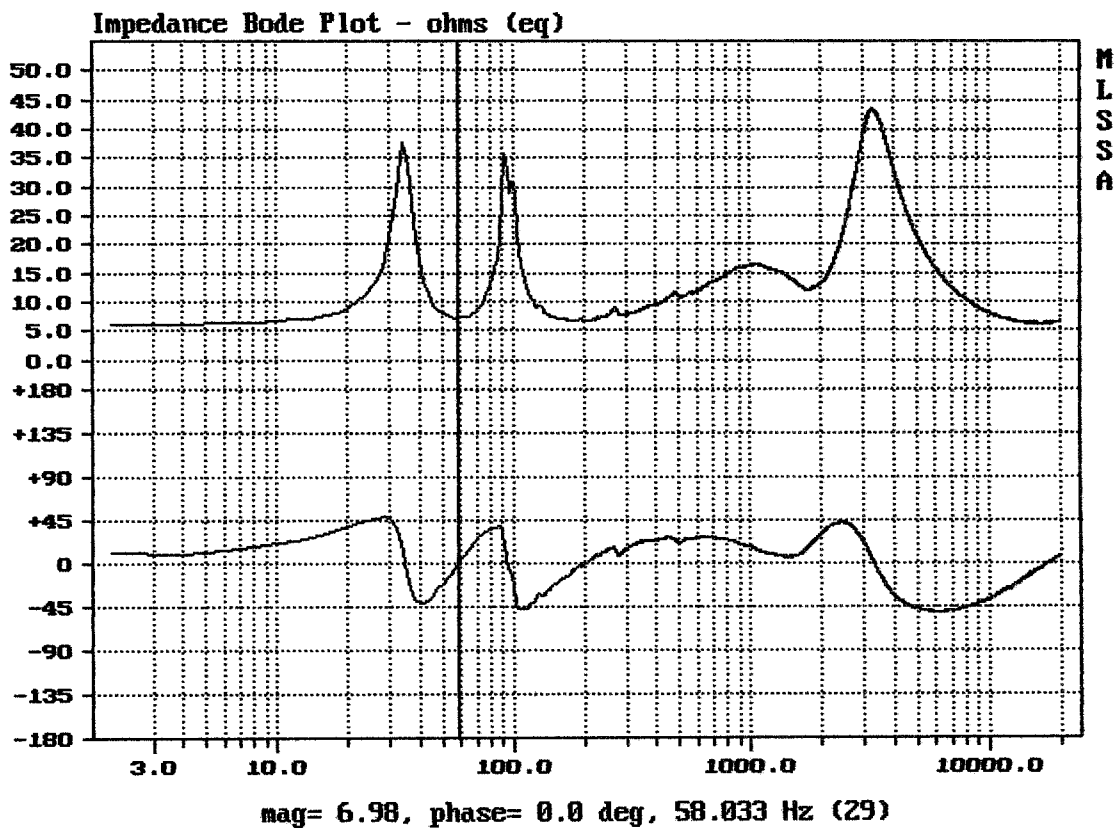


DTTO

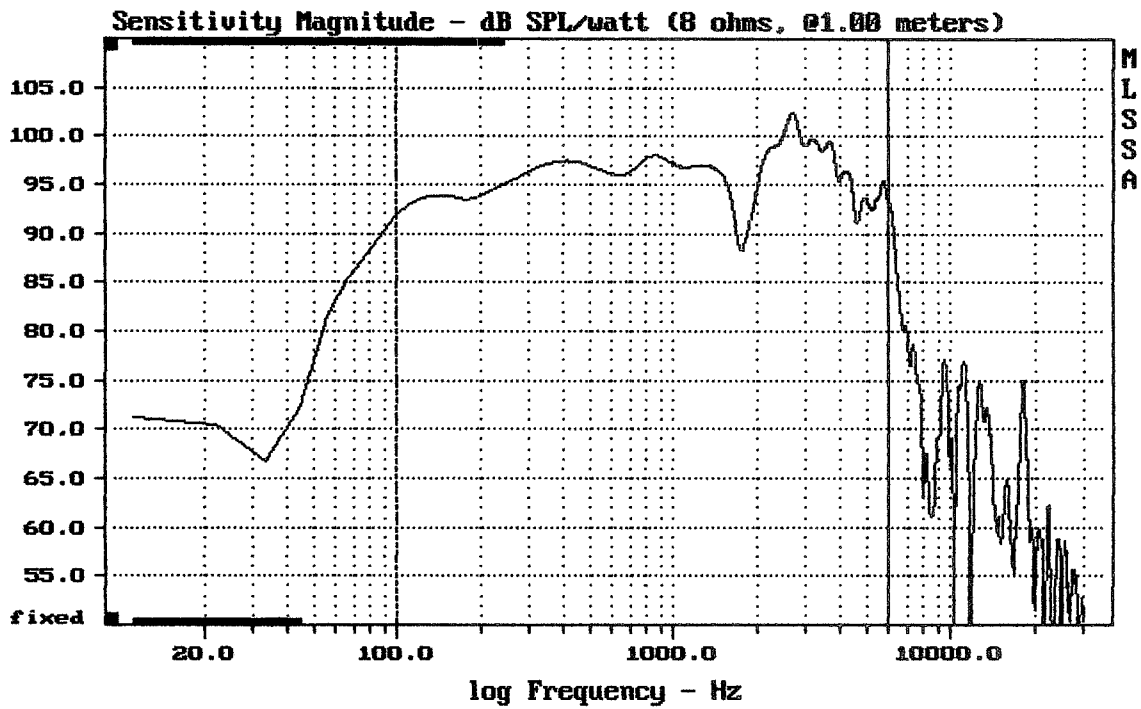

Level (100:6004 Hz) = 96.54 dB SPL/watt (8 ohms, @1.00 meters)

M1201

MLSSA: Frequency Domain

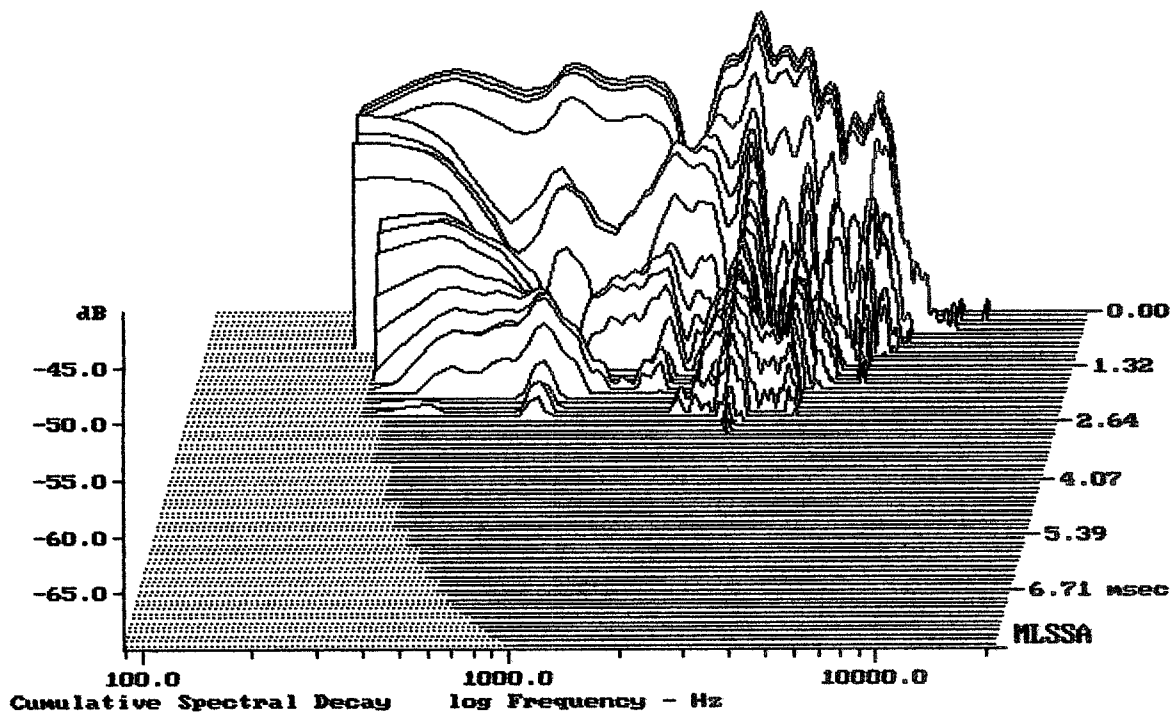

-69.15 dB, 2663 Hz (60), 2.860 msec (27)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.25	Ohms
2	Fs	57.58	Hz
3	Re	5.08	Ohms[dc]
4	Res	85.31	Ohms
5	Qms	7.91	
6	Qes	0.47	
7	Qts	0.44	
8	L1	0.75	mH
9	L2	1.23	mH
10	R2	3.63	Ohms
11	RMSE-load	0.43	Ohms
12	Vas(Sd)	76.73	liters
13	Mms	39.42	grams
14	Cms	194	μ M/Newton
15	B1	12.41	Tesla-M
16	SPLref(Sd)	96.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.9% (-20% to -50% is recommended).

M1201

MLSSA: Parameters

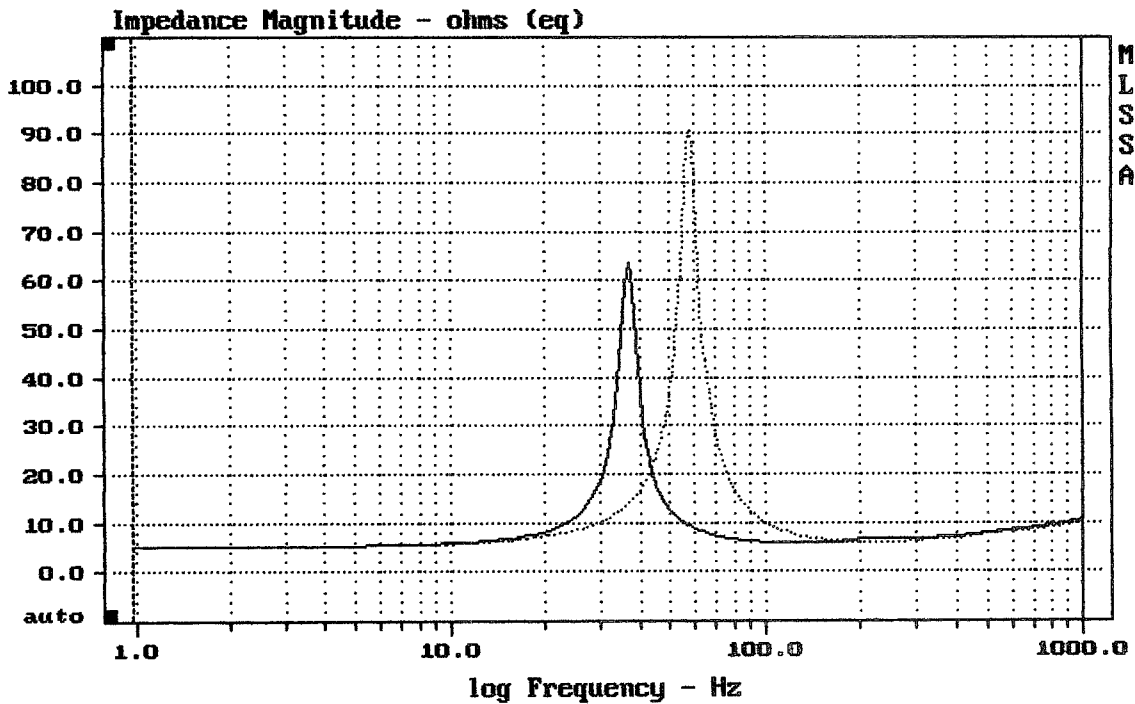

mean: 9.342, rms: 12.17, std: 7.794, max: 90.62, min: 5.193

MLSSA: Frequency Domain