


Level (100:3496 Hz) = 94.91 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE BASSLITE CH2010

MLSSA: Frequency Domain

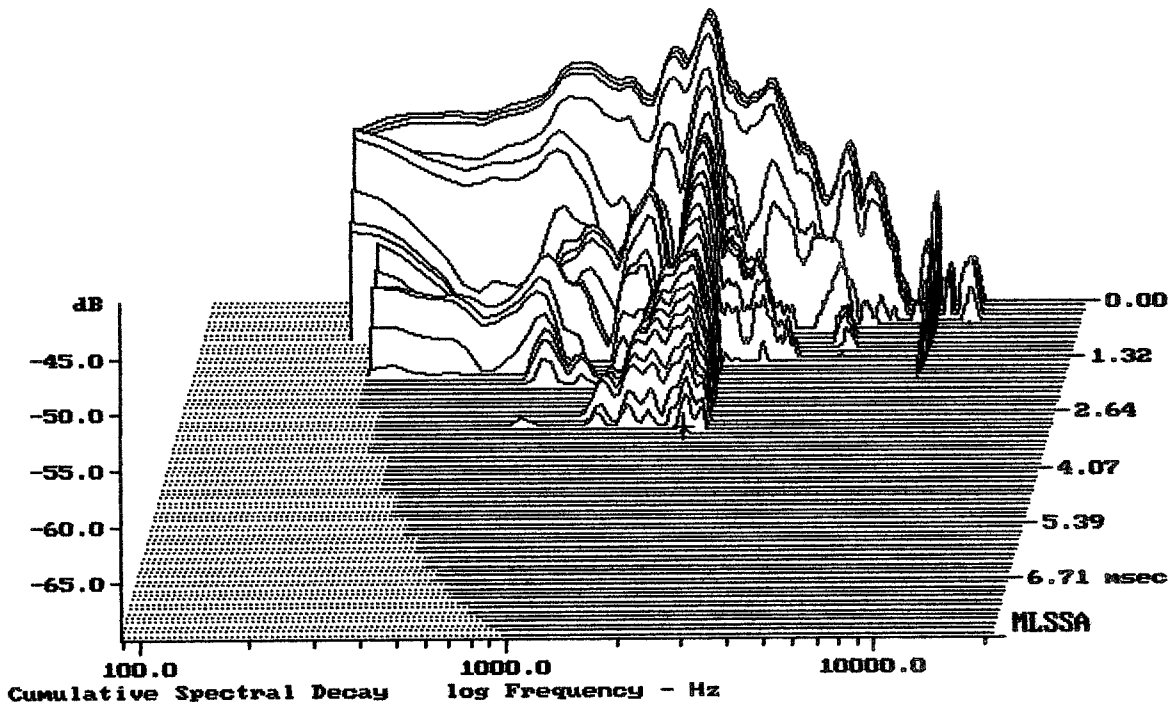

-69.33 dB, 2131 Hz (48), 3.190 msec (30)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.26	Ohms
2	Fs	58.66	Hz
3	Re	5.47	Ohms[dc]
4	Res	64.99	Ohms
5	Qms	5.82	
6	Qes	0.49	
7	Qts	0.45	
8	L1	0.65	mH
9	L2	0.65	mH
10	R2	2.27	Ohms
11	RMSE-load	0.32	Ohms
12	Vas(Sd)	43.46	liters
13	Mms	28.55	grams
14	Cms	258	$\mu\text{M}/\text{Newton}$
15	B1	10.84	Tesla-M
16	SPLref(Sd)	94.4	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.2% (-20% to -50% is recommended).

EMINENCE BASSLITE CH2010

MLSSA: Parameters

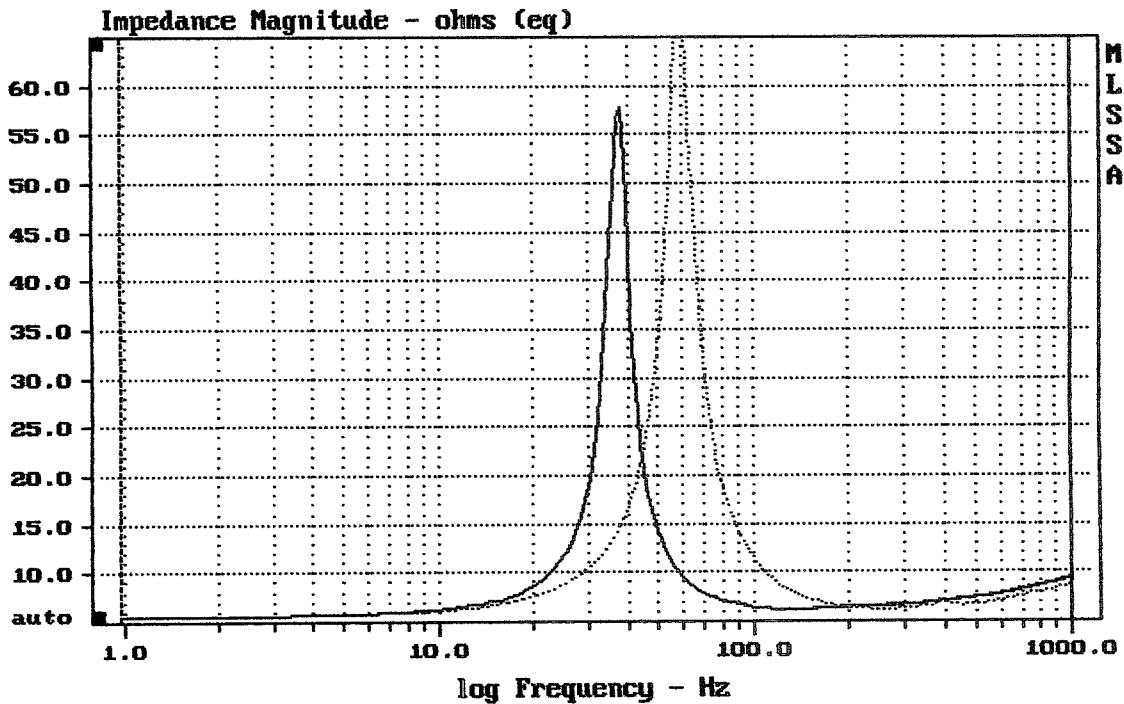

mean: 8.745, rms: 11.12, std: 6.876, max: 71.24, min: 5.566

MLSSA: Frequency Domain