


Level (100:7002 Hz) = 96.98 dB SPL/watt (16 ohms, @1.00 meters)

EMINENCE LEGEND 102B

MLSSA: Frequency Domain

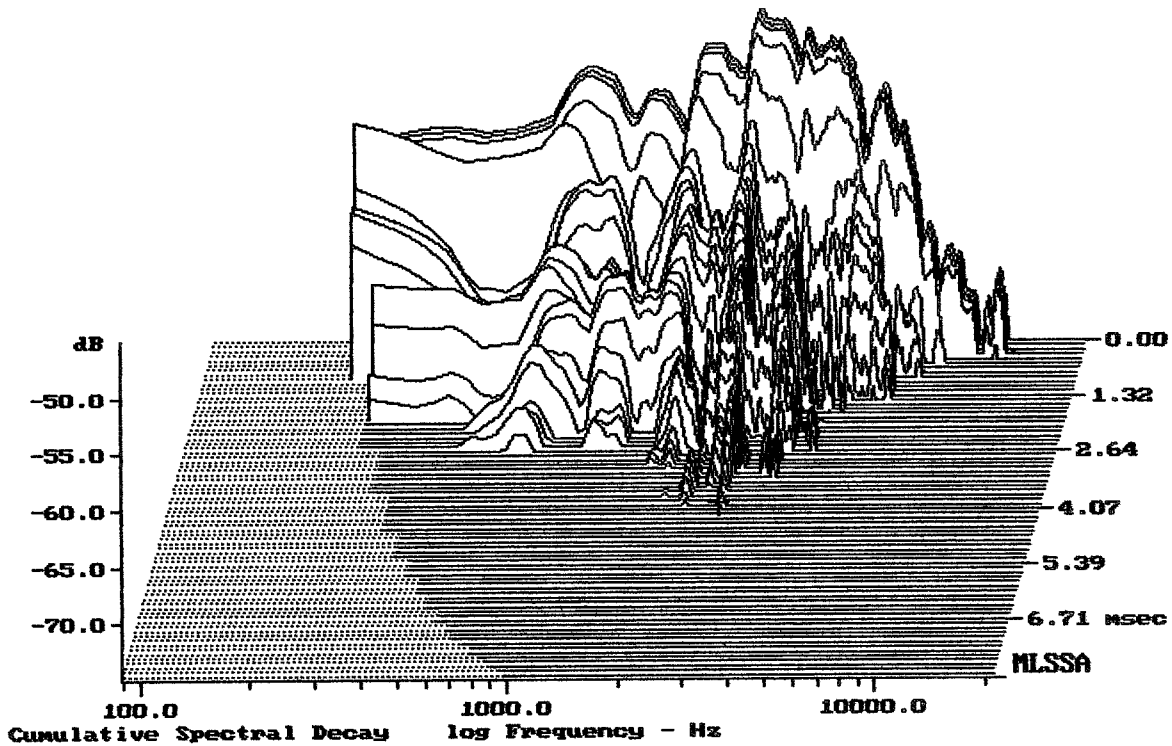

-74.74 dB, 2797 Hz (63), 3.960 msec (37)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.24	Ohms
2	Fs	103.94	Hz
3	Re	11.61	Ohms[dc]
4	Res	85.61	Ohms
5	Qms	19.16	
6	Qes	2.60	
7	Qts	2.29	
8	L1	0.60	mH
9	L2	0.93	mH
10	R2	5.06	Ohms
11	RMSE-load	0.25	Ohms
12	Vas(Sd)	28.03	liters
13	Mms	15.49	grams
14	Cms	151	$\mu\text{M}/\text{Newton}$
15	B1	6.72	Tesla-M
16	SPLref(Sd)	92.7	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (10.00 grams)

Area (Sd): 363.05 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.2% (-20% to -50% is recommended).

EMINENCE LEGEND 102B

MLSSA: Parameters

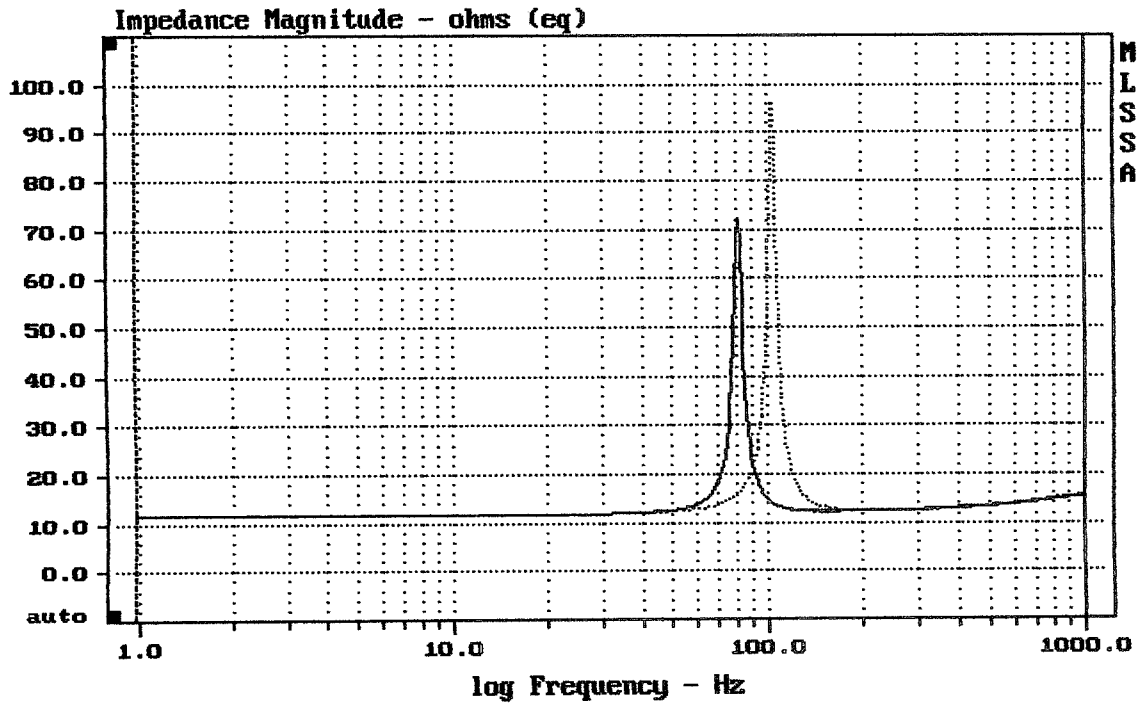

mean: 14.79, rms: 16.22, std: 6.668, max: 96.63, min: 11.65

MLSSA: Frequency Domain