


mean: 96.65, rms: 97.25, std: 2.81, max: 104.38, min: 86.60


EAW M8

MLSSA: Frequency Domain

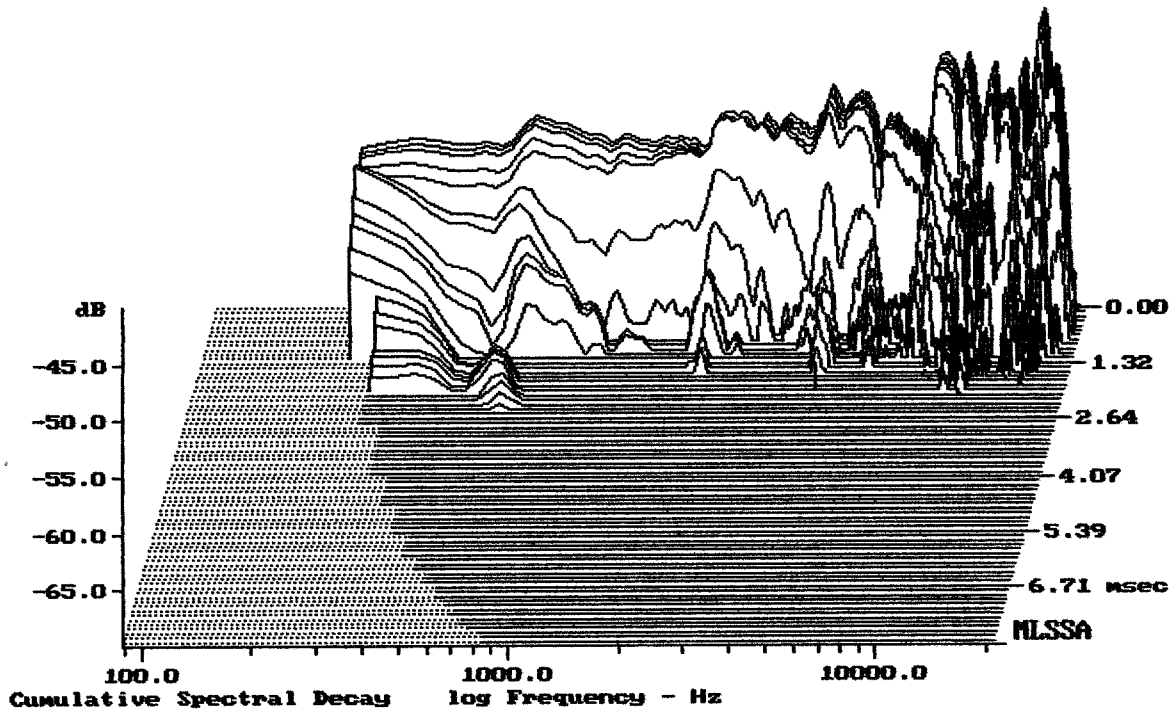

-70.00 dB, 4306 Hz (97), 1.650 msec (16)


DTTO

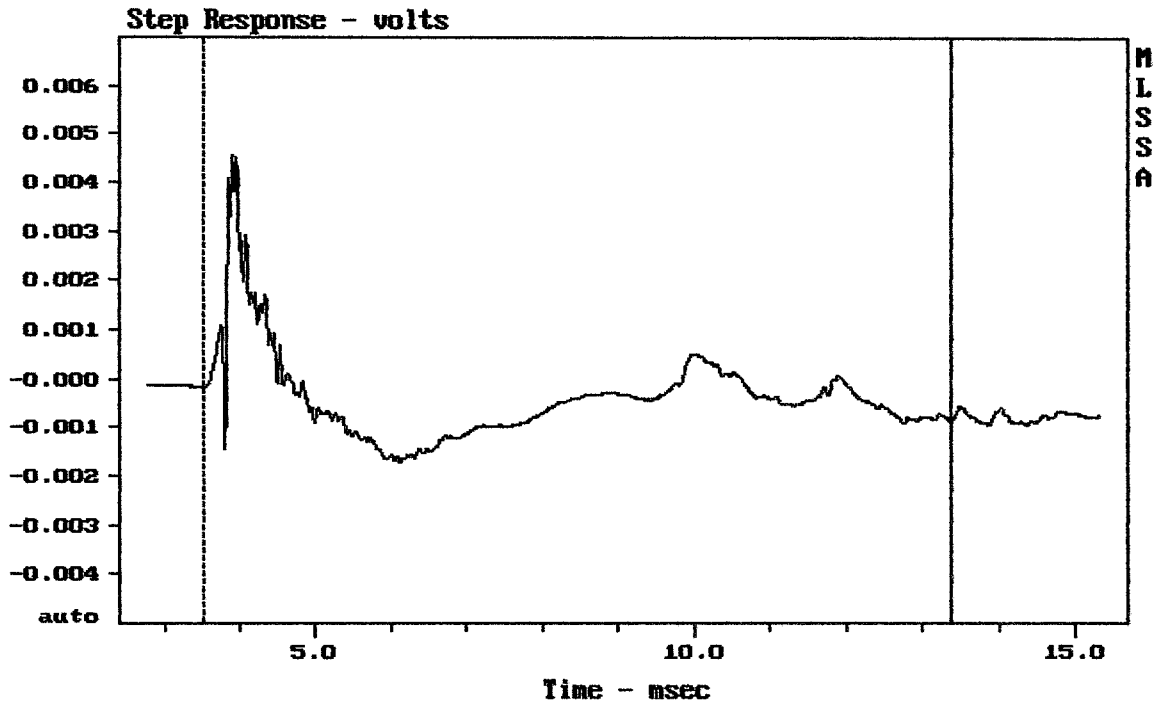

mean: -0.0004016, rms: 0.0009793, std: 0.0008931, max: 0.004564, min: -0.001729

EAW MWS


MLSSA: Time Domain

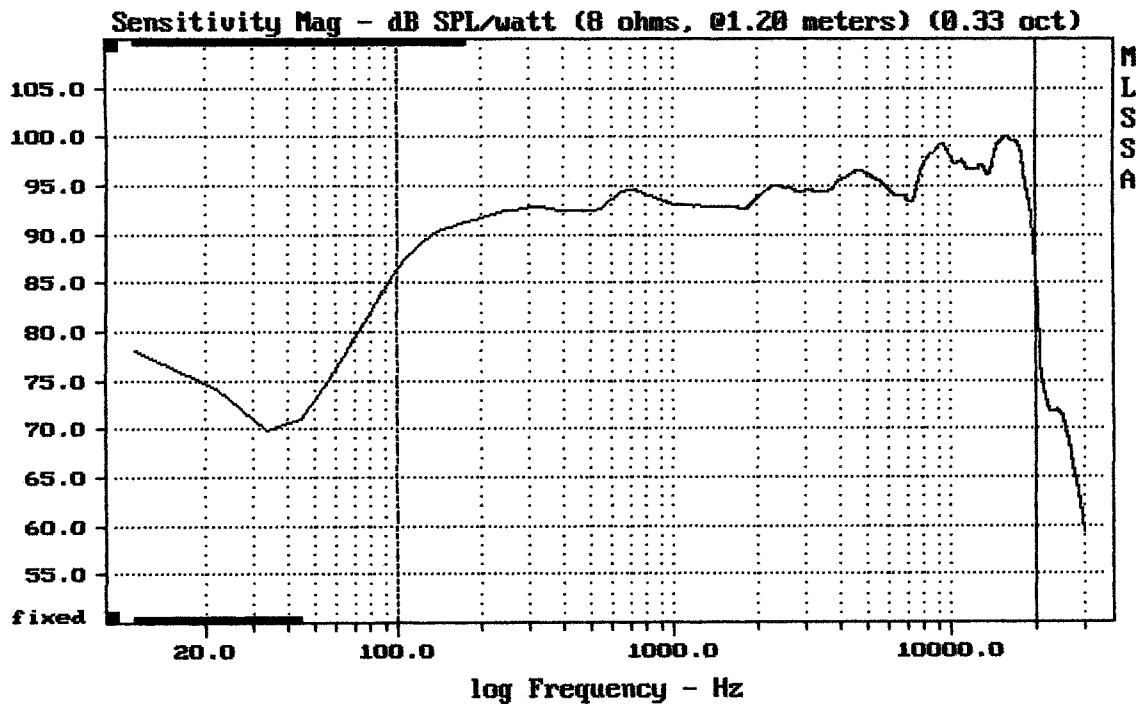

Level (100:20253 Hz) = 94.62 dB SPL/watt (8 ohms, @1.20 meters) (0.33 oct)

EAW MWS


MLSSA: Frequency Domain

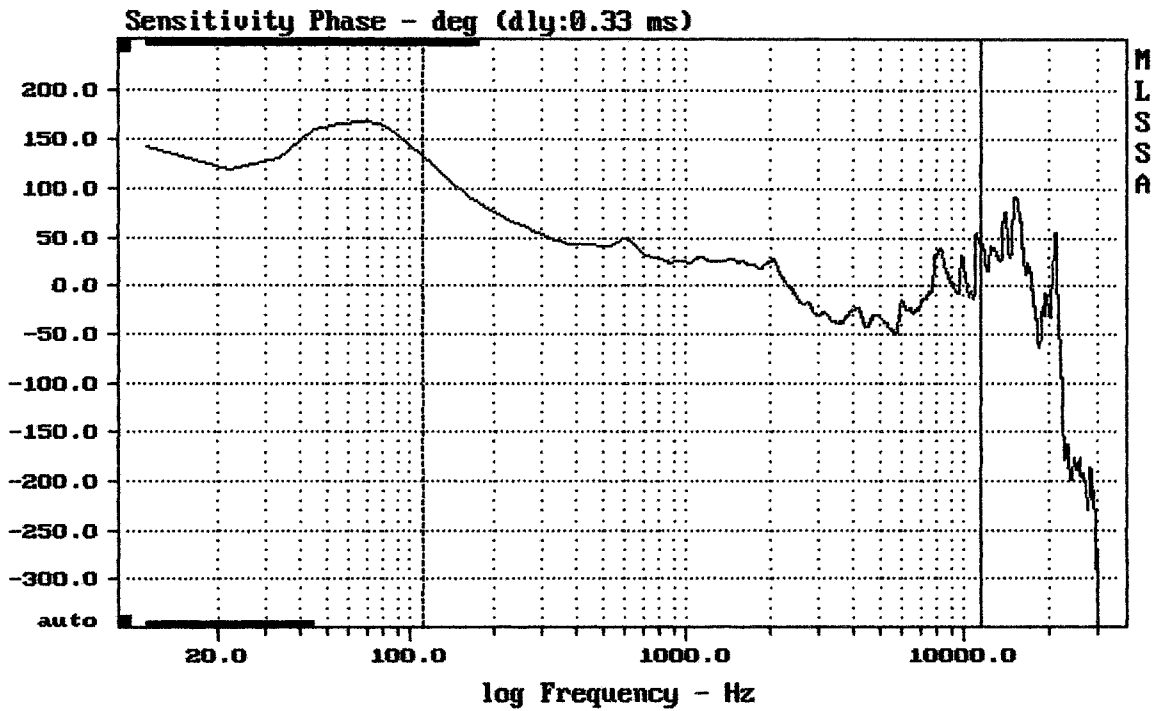

mean: -1.345, rms: 29.83, std: 29.8, max: 133.4, min: -49.59

EAW MWB


MLSSA: Frequency Domain

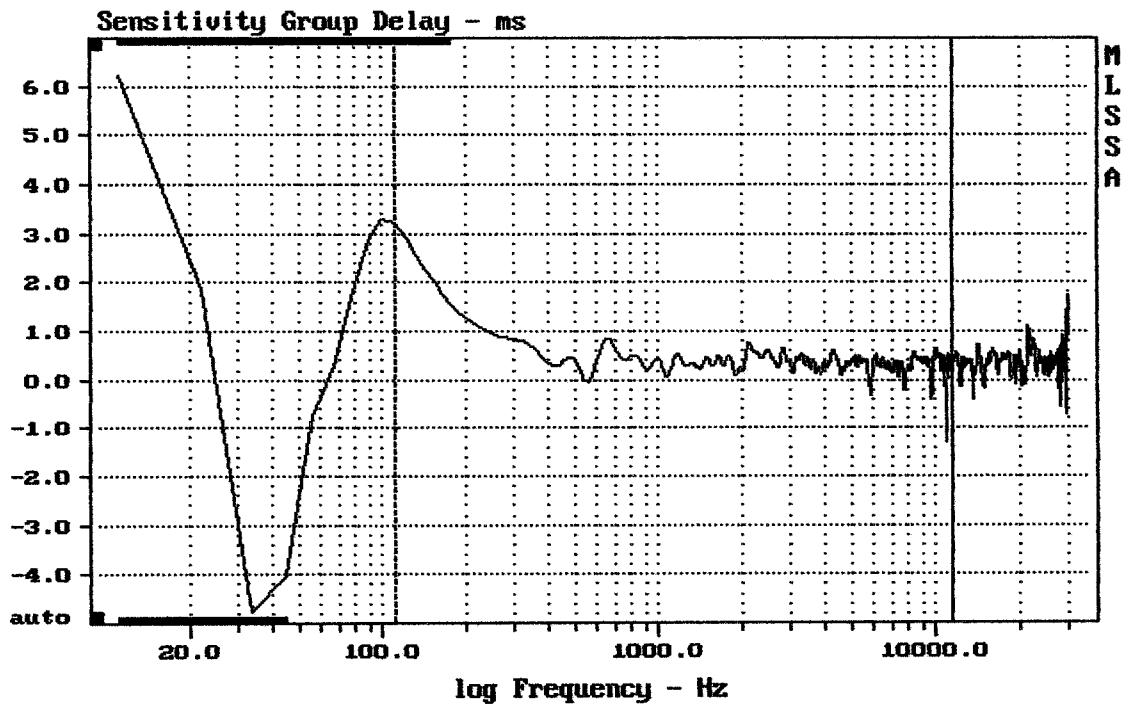

mean: 0.3512, rms: 0.4562, std: 0.2911, max: 3.218, min: -1.28

EAW MWB


MLSSA: Frequency Domain

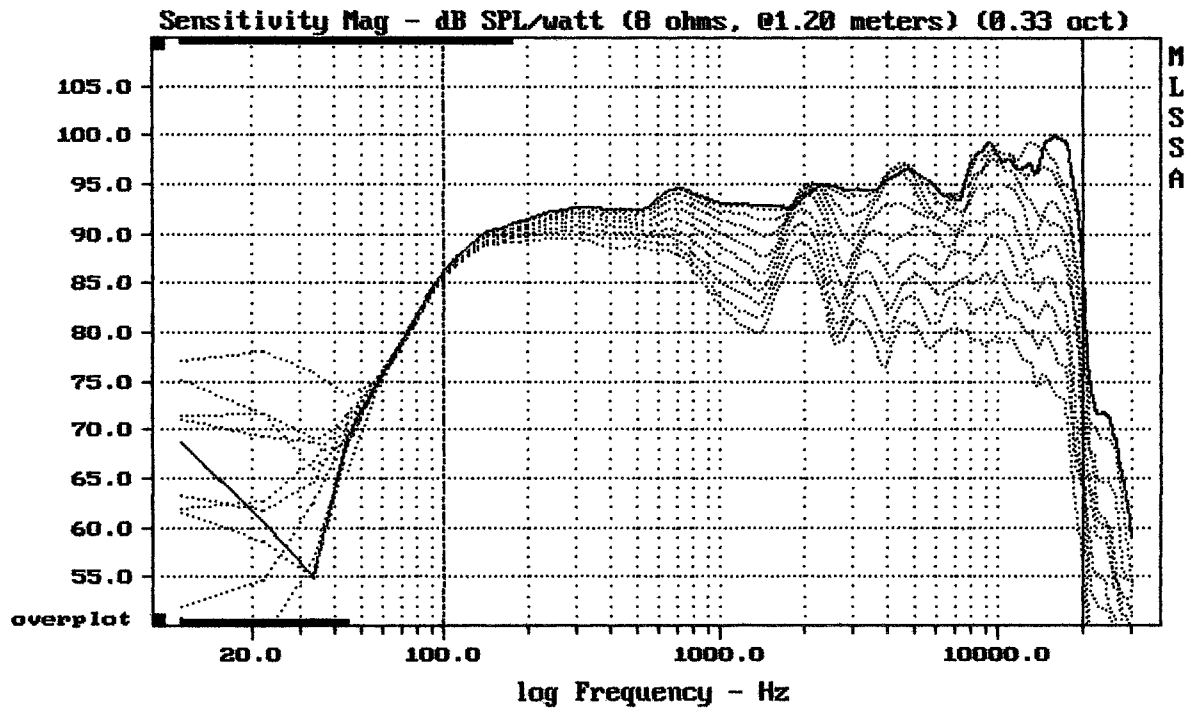

Overlay Compare: dev= +19/-14, std= 6.7, avg= -19

EAW MW8


MLSSA: Frequency Domain

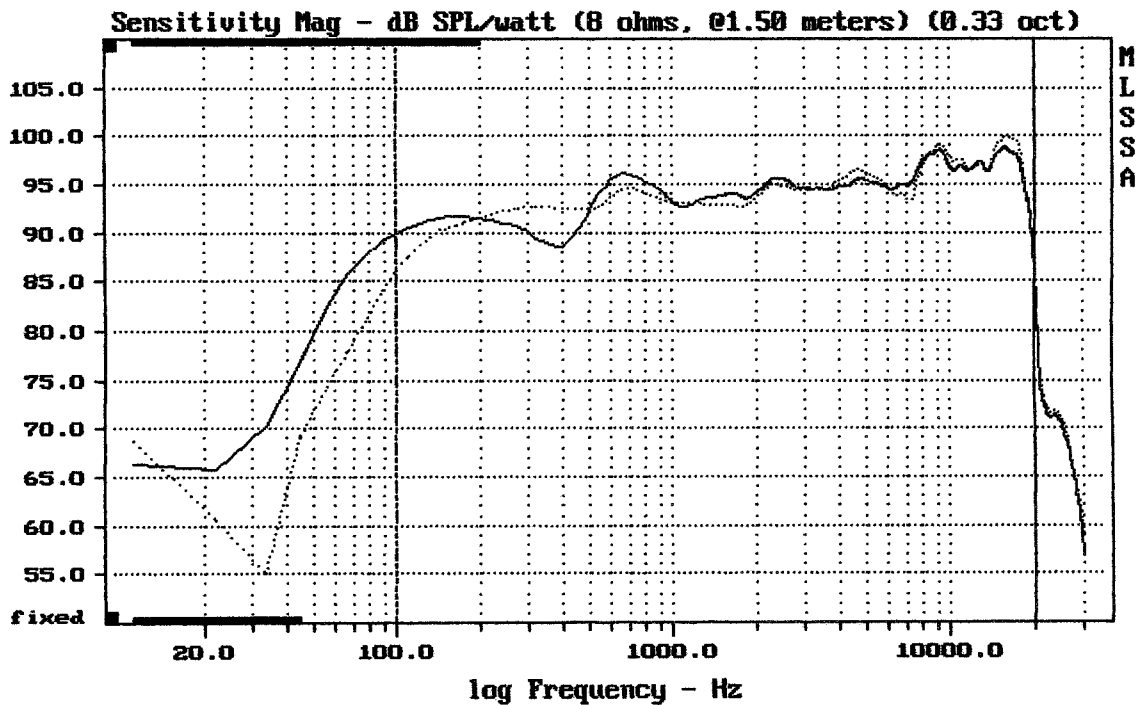

Overlay Compare: dev= +4.1/-3.7, std= 0.84, avg= -0.28

EAW MW8


MLSSA: Frequency Domain

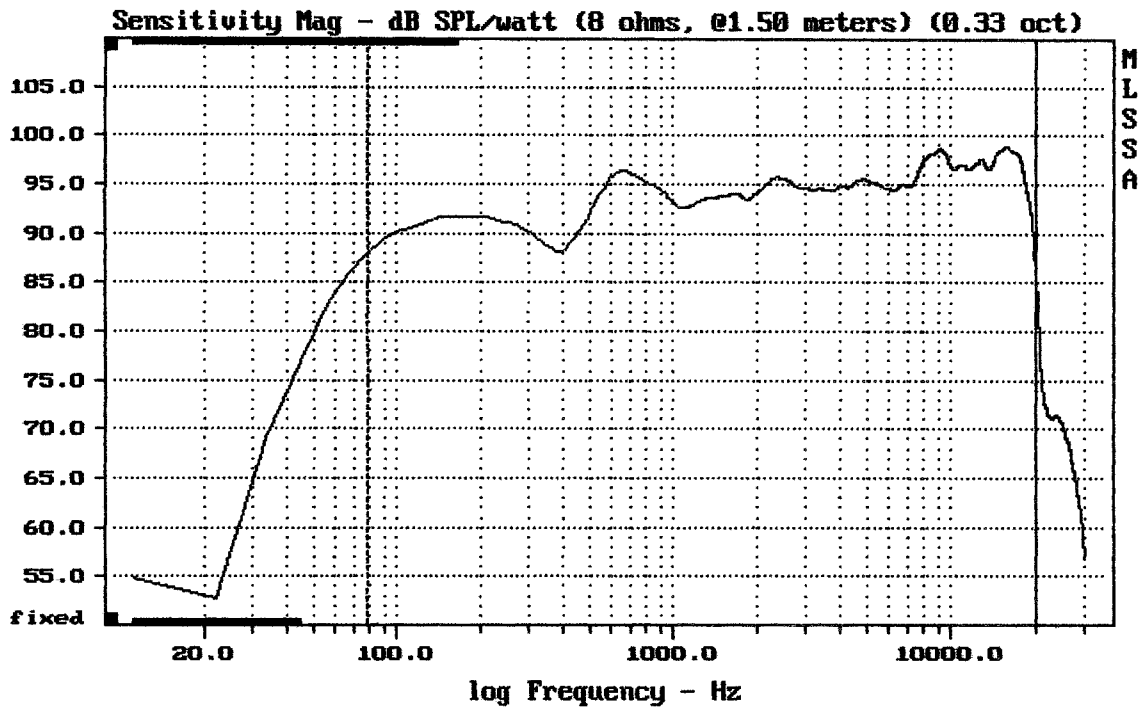

Level (78:19997 Hz) = 94.36 dB SPL/watt (8 ohms, @1.50 meters) (0.33 oct)


MWB FLOOR

MLSSA: Frequency Domain

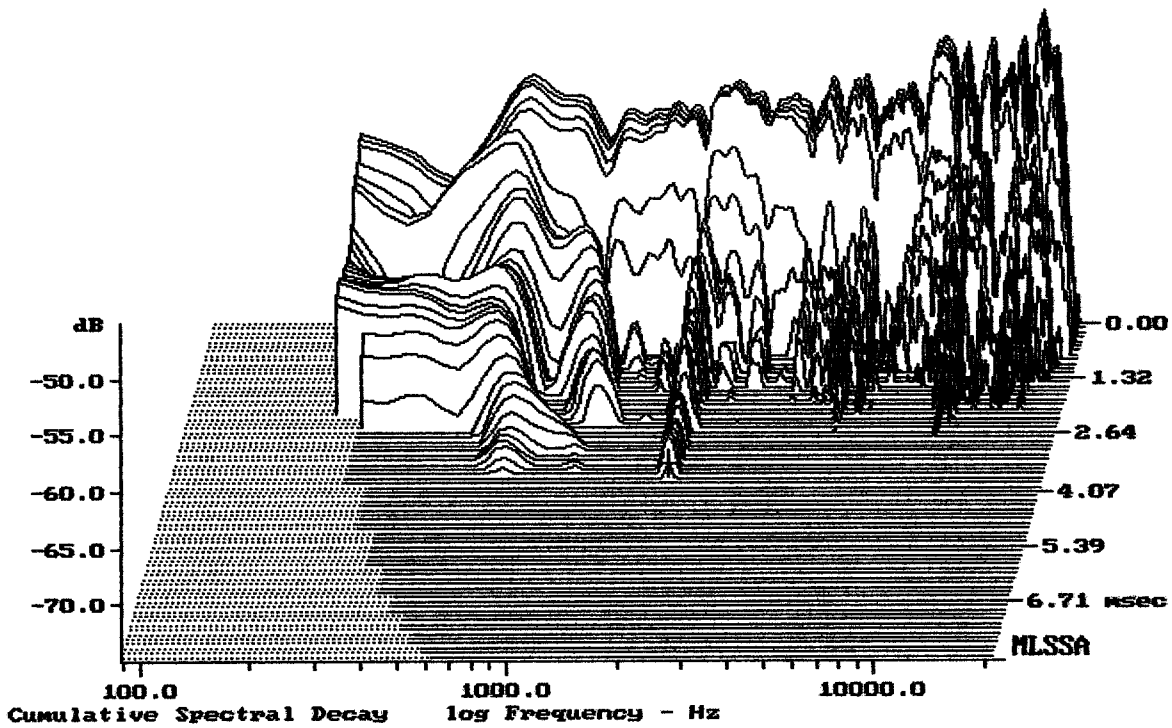

-73.77 dB, 1998 Hz (45), 3.740 msec (35)


DTTO

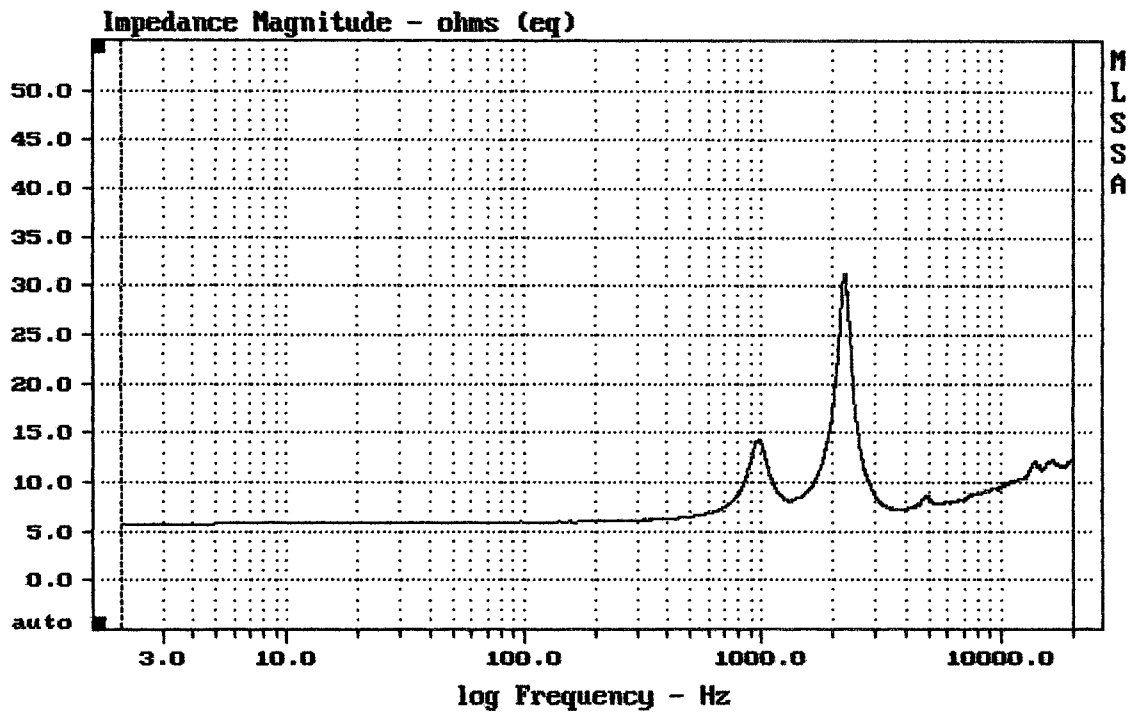

mean: 10.38, rms: 10.8, std: 2.971, max: 31.24, min: 5.688

EAW MVB


MLSSA: Frequency Domain

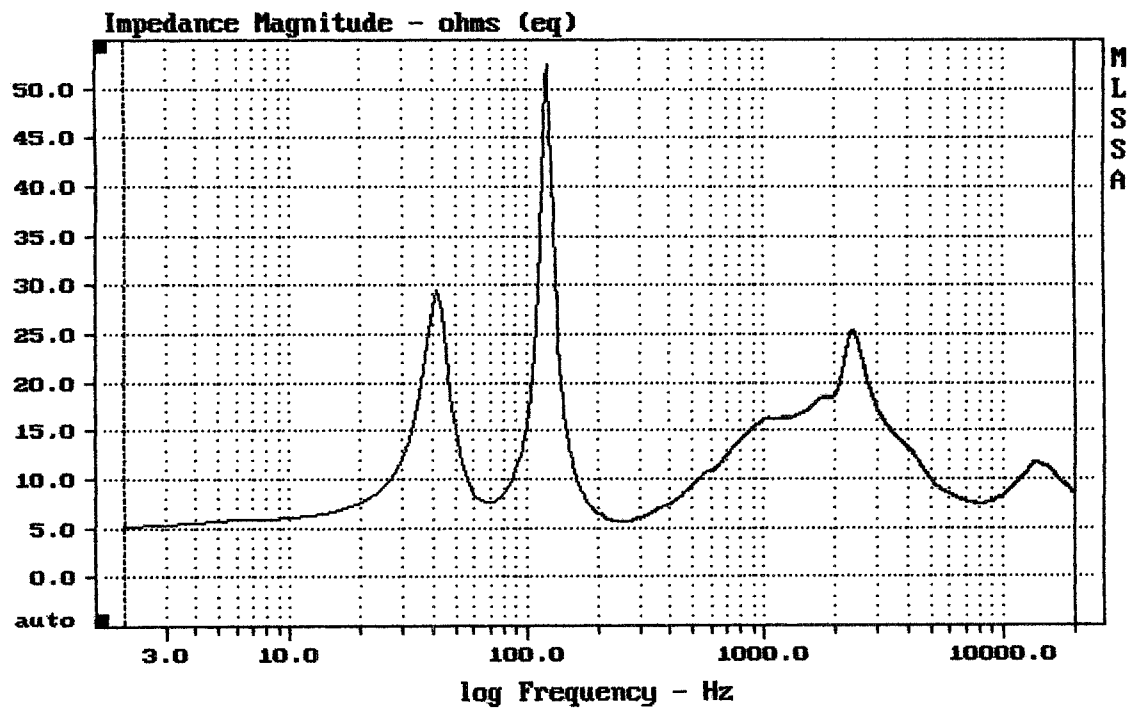

mean: 10.97, rms: 11.58, std: 3.715, max: 52.52, min: 5.15

EAW MVB


MLSSA: Frequency Domain

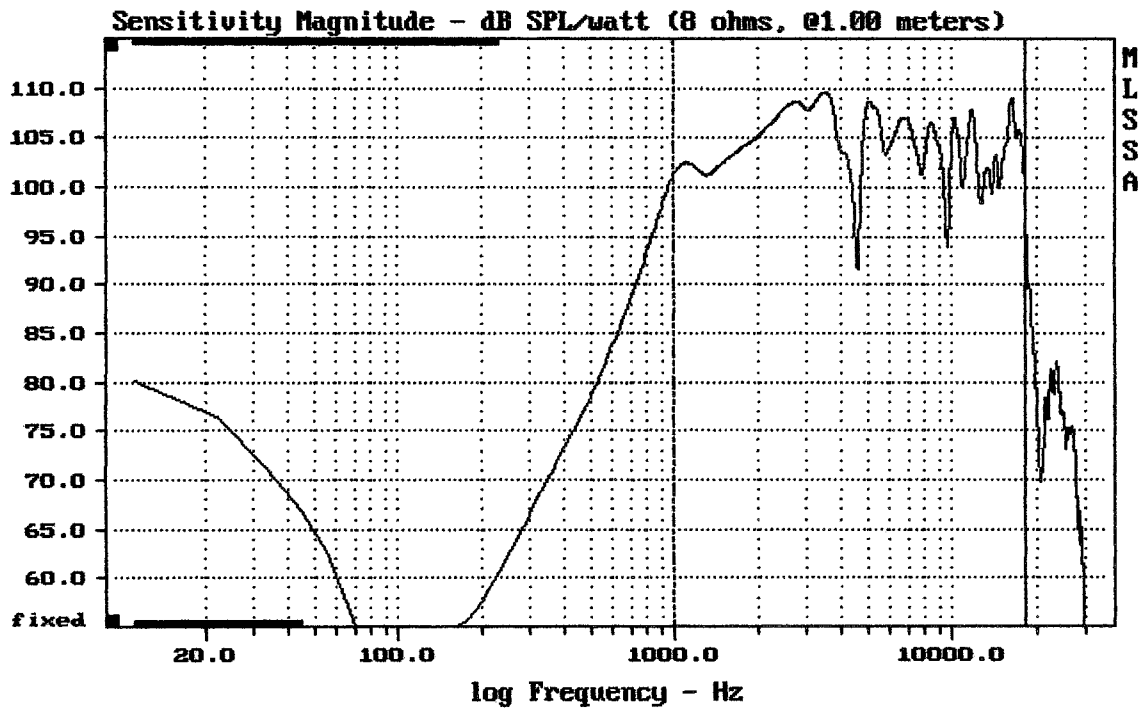

Level (988:18311 Hz) = 105.38 dB SPL/watt (8 ohms, @1.00 meters)


EAW M8

MLSSA: Frequency Domain

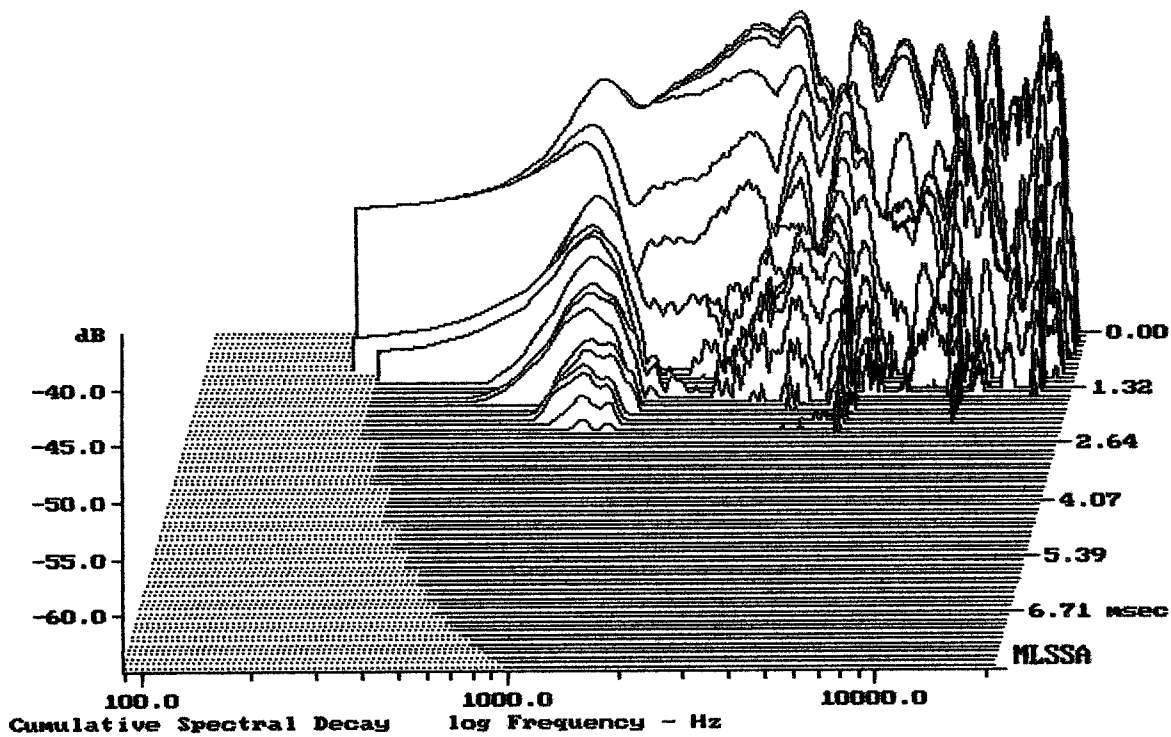

-64.28 dB, 5060 Hz (114), 2.200 msec (21)


DT10

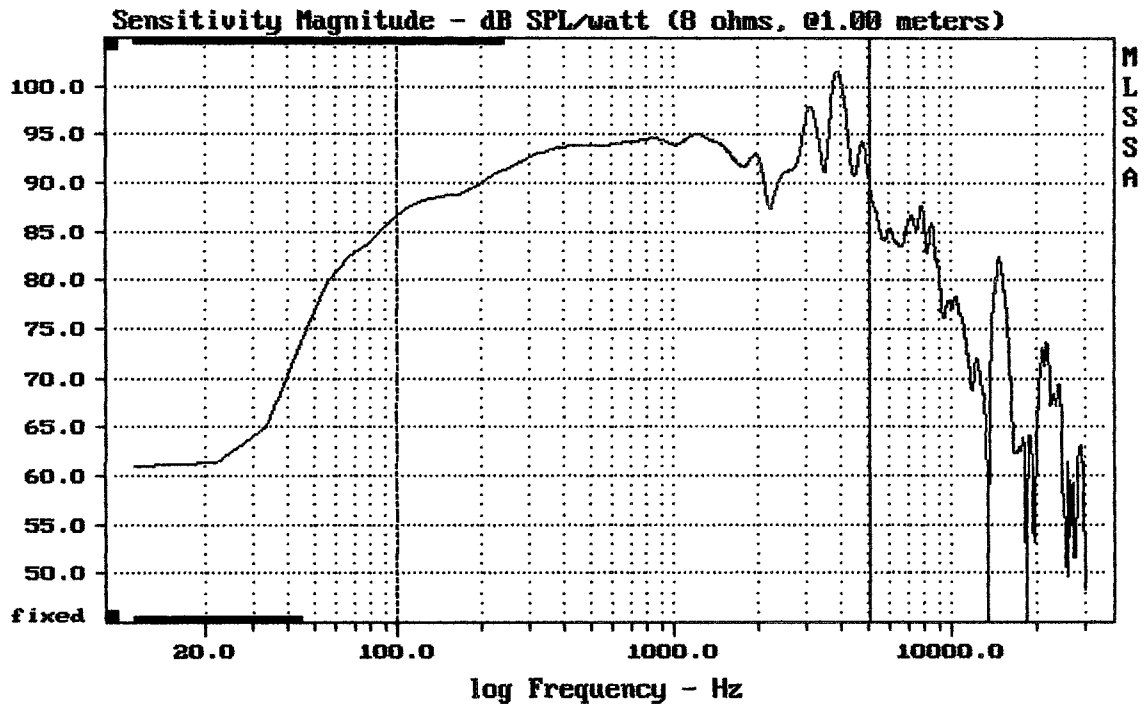

Level (100:5185 Hz) = 93.47 dB SPL/watt (8 ohms, @1.00 meters)

EAW M88

MLSSA: Frequency Domain

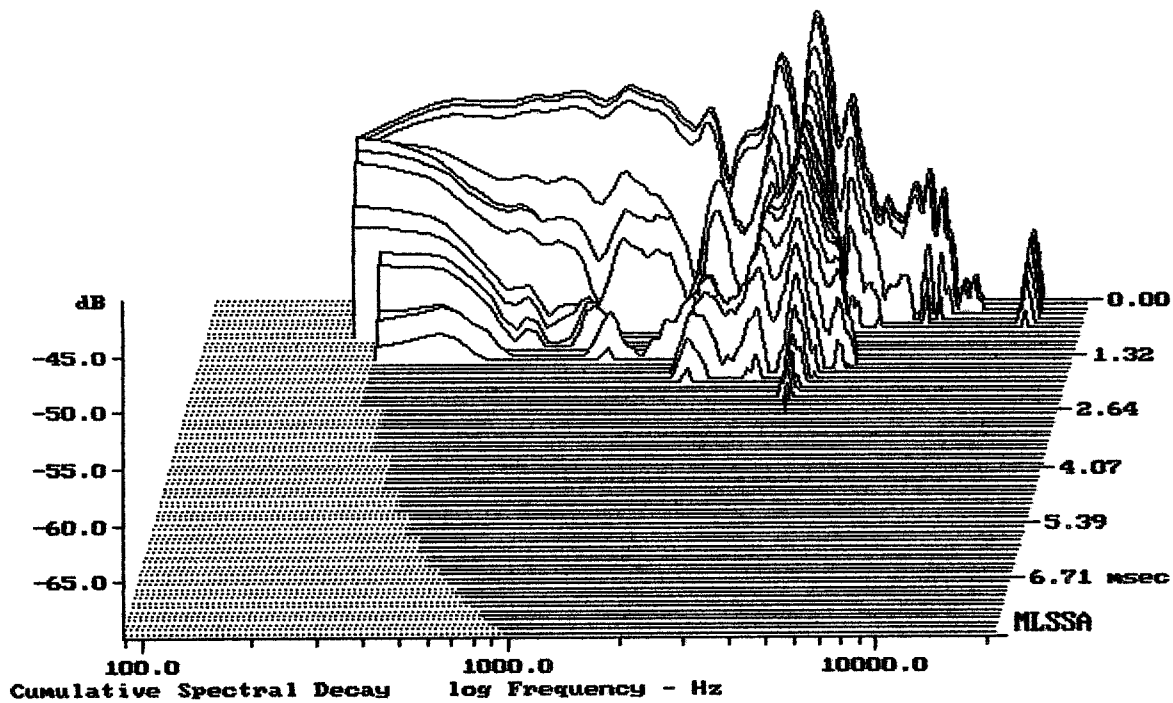

-69.68 dB, 3773 Hz (85), 2.530 msec (24)

DT10

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.51	Ohms
2	Fs	79.80	Hz
3	Re	4.93	Ohms[dc]
4	Res	79.67	Ohms
5	Qms	6.04	
6	Qes	0.37	
7	Qts	0.35	
8	L1	0.51	mH
9	L2	0.87	mH
10	R2	3.03	Ohms
11	RMSE-load	0.44	Ohms
12	Vas(Sd)	12.99	liters
13	Mms	17.21	grams
14	Cms	231	μ M/Newton
15	B1	10.67	Tesla-M
16	SPLref(Sd)	94.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 200.00 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -38.4% (-20% to -50% is recommended).

EAW MW8

MLSSA: Parameters

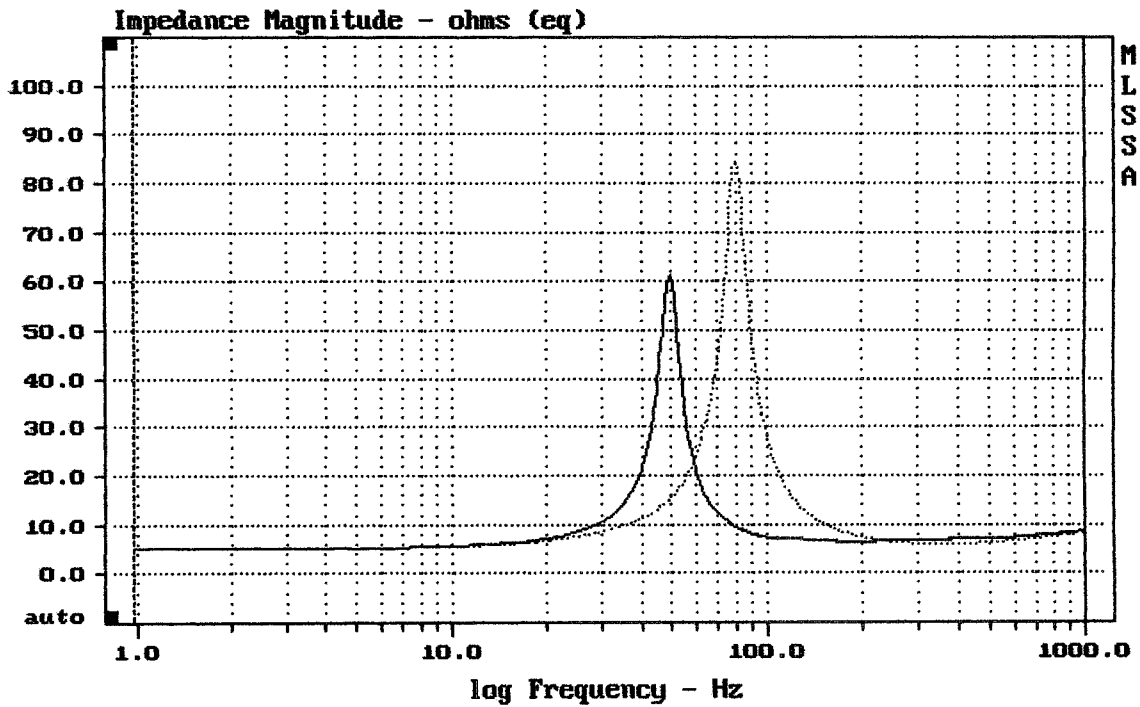

mean: 9.484, rms: 13.48, std: 9.66, max: 84.45, min: 5.056

MLSSA: Frequency Domain