


Level (100:4785 Hz) = 95.32 dB SPL/watt (4 ohms, @1.00 meters)

10PS26/4

MLSSA: Frequency Domain

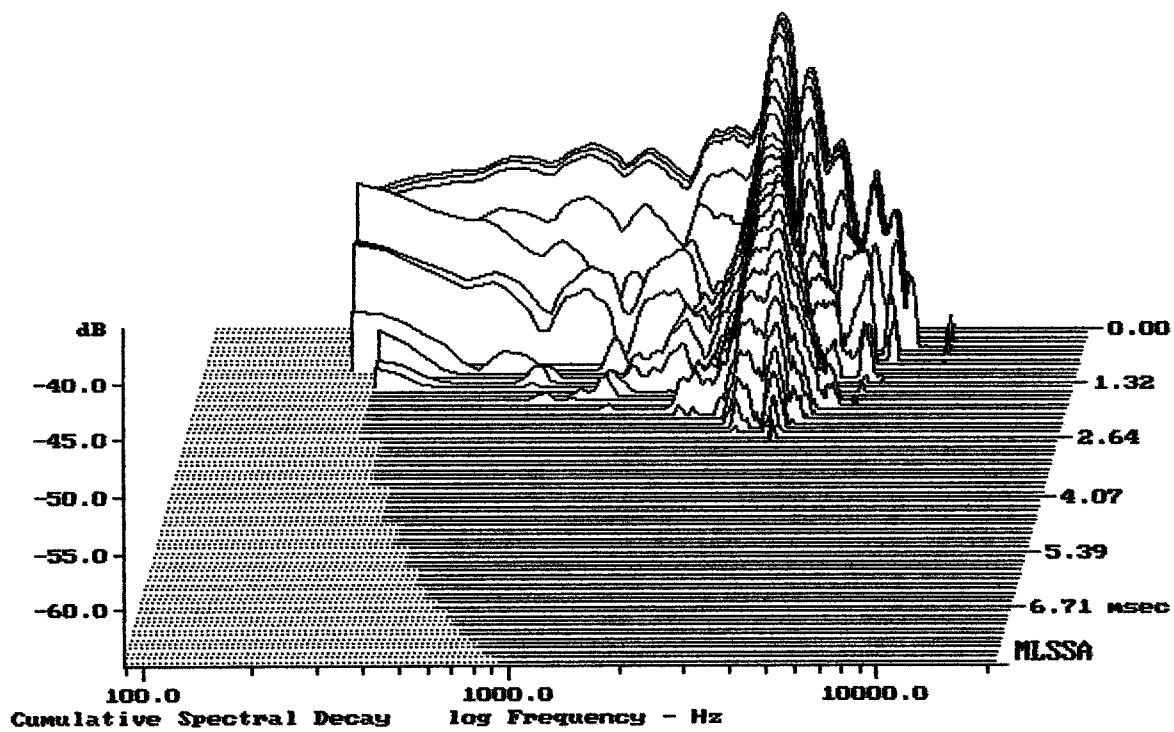

-63.96 dB, 3462 Hz (78), 2.640 msec (25)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.19	Ohms
2	Fs	55.51	Hz
3	Re	2.98	Ohms[dc]
4	Res	118.76	Ohms
5	Qms	11.91	
6	Qes	0.30	
7	Qts	0.29	
8	L1	0.18	mH
9	L2	1.13	mH
10	R2	3.11	Ohms
11	RMSE-load	0.26	Ohms
12	Vas(Sd)	38.68	liters
13	Mms	35.80	grams
14	Cms	230	$\mu\text{M}/\text{Newton}$
15	B1	11.16	Tesla-M
16	SPLref(Sd)	95.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.4% (-20% to -50% is recommended).

10PS26/4

MLSSA: Parameters

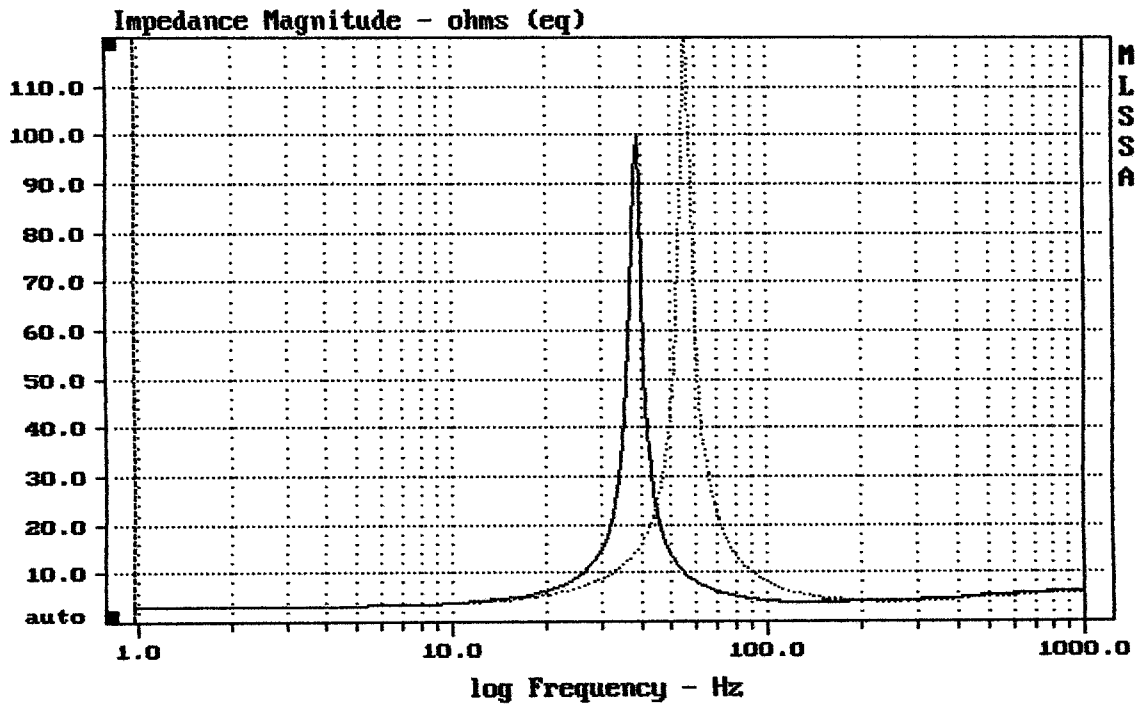

mean: 6.745, rms: 11.39, std: 9.178, max: 122.7, min: 3.071

MLSSA: Frequency Domain