



Level (1498:19997 Hz) = 109.09 dB SPL/watt (12 ohms, @1.60 meters)

1.4" + HORN QSC WL3082

MLSSA: Frequency Domain

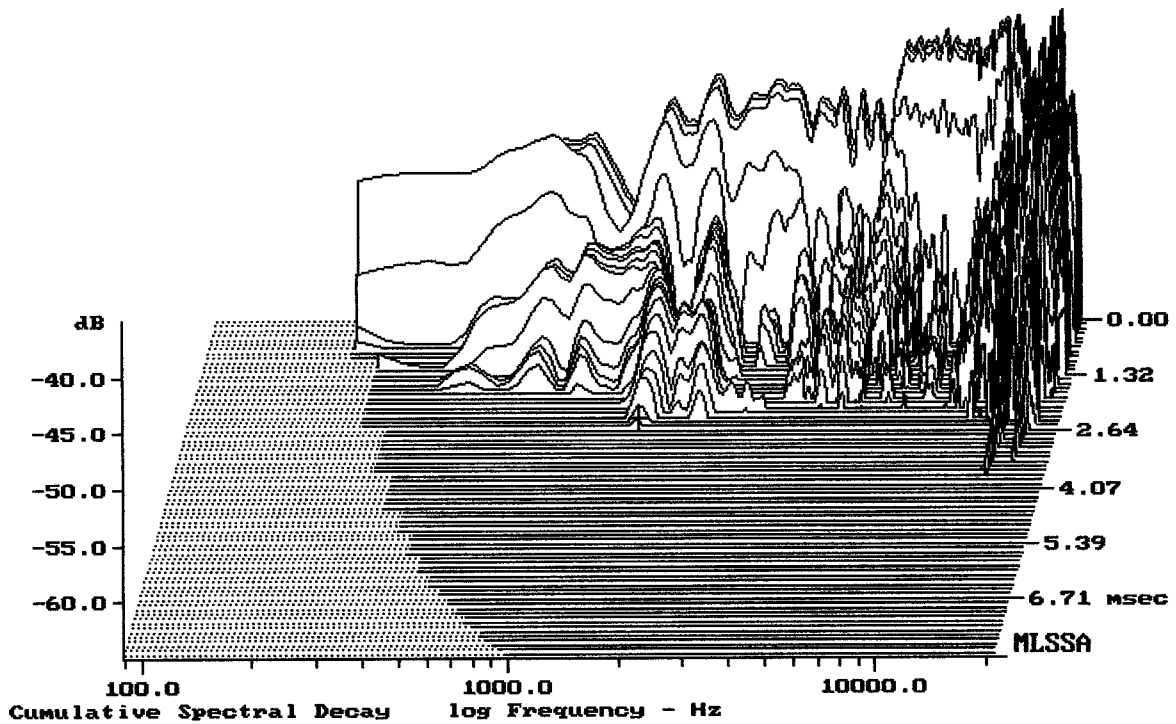

-64.34 dB, 1509 Hz (34), 2.530 msec (24)

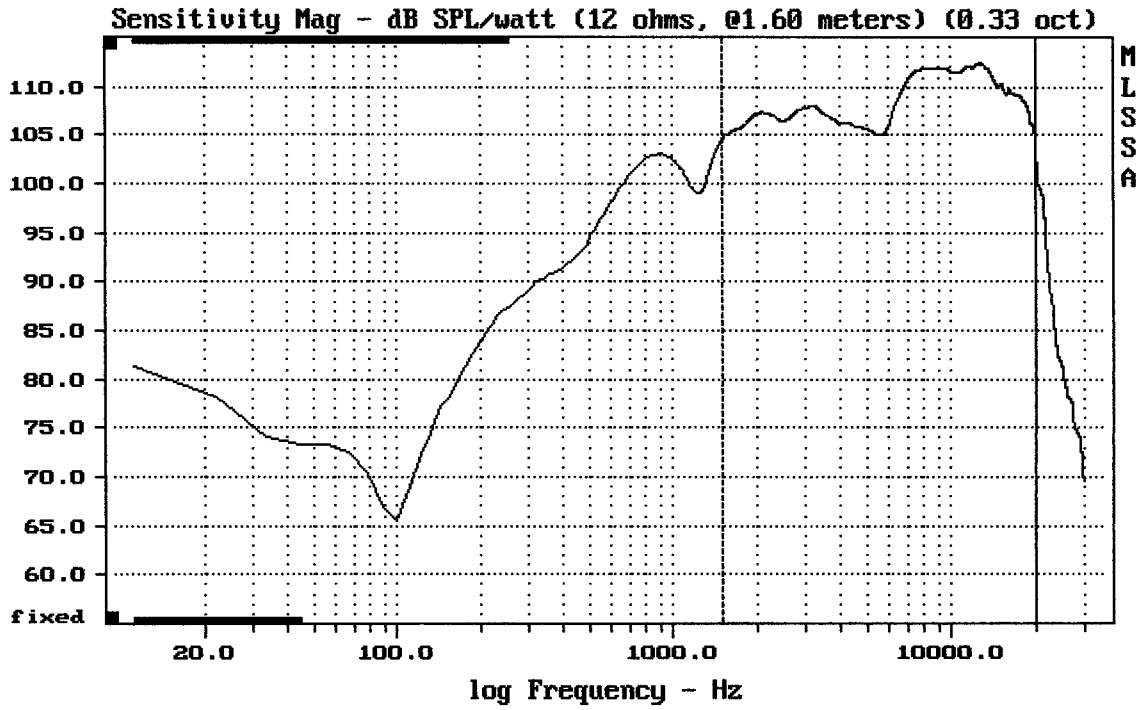


---

Level (1498:19997 Hz) = 109.06 dB SPL/watt (12 ohms, @1.60 meters) (0.33 oct)

---

1.4" + HORN QSC WL3082

MLSSA: Frequency Domain

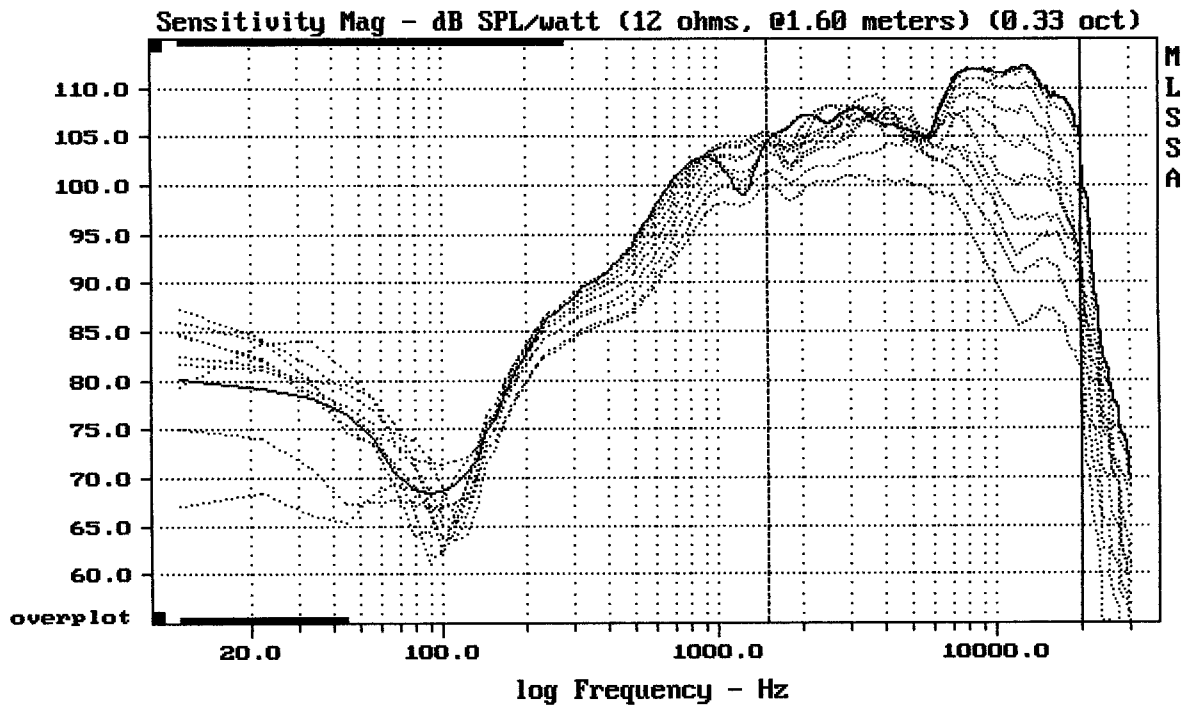


---

Overlay Compare: dev= +13/-8.9, std= 7.7, avg= -18

---


1.4" + HORN QSC WL3082

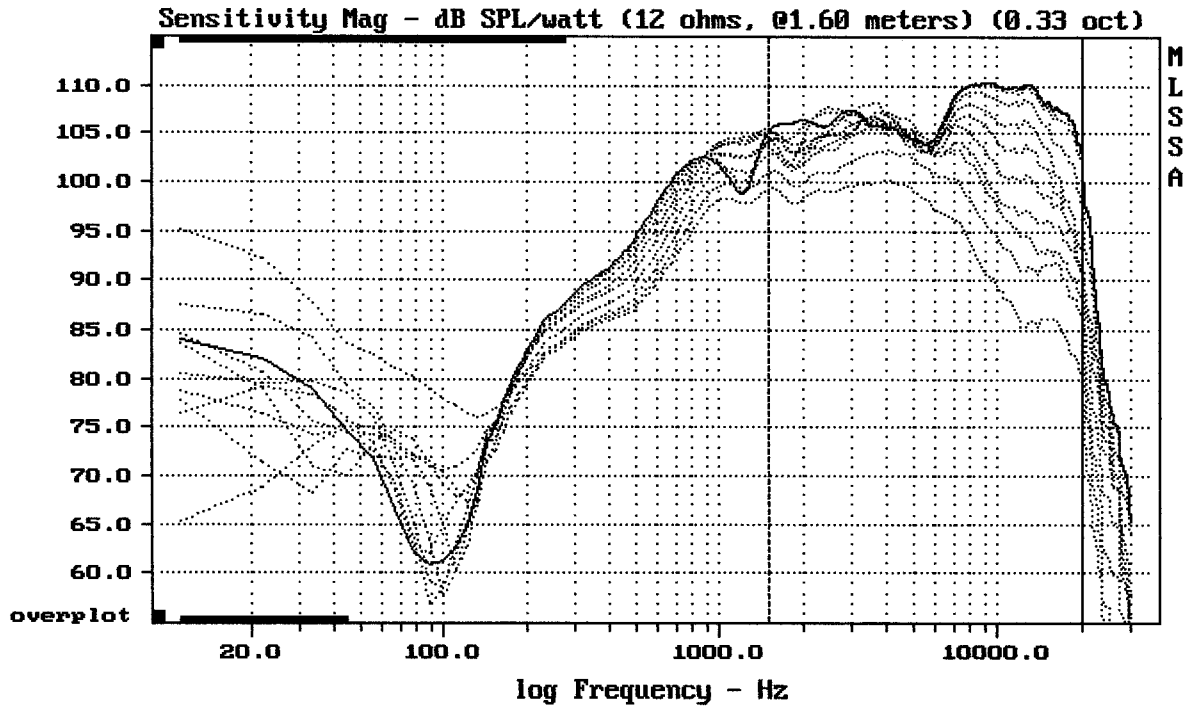


Overlay Compare: dev= +12/-7.6, std= 7.1, avg= -17

ULIU GRILU ....

MLSSA: Frequency Domain

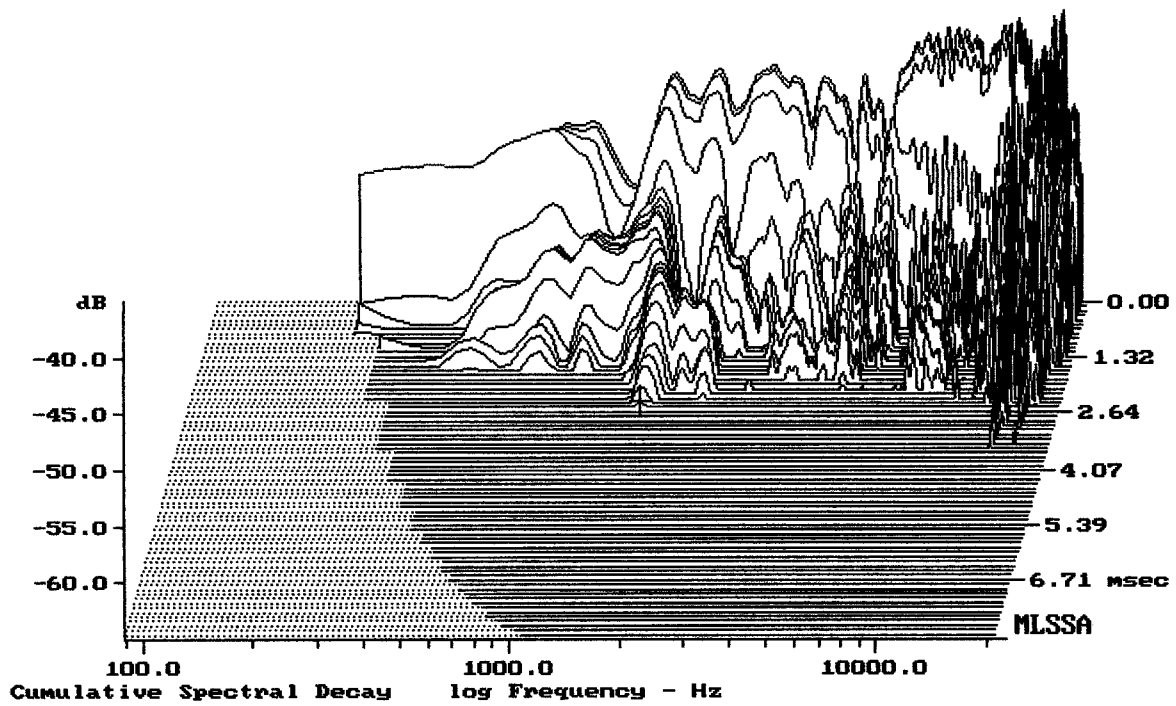


-64.43 dB, 1509 Hz (34), 2.530 msec (24)

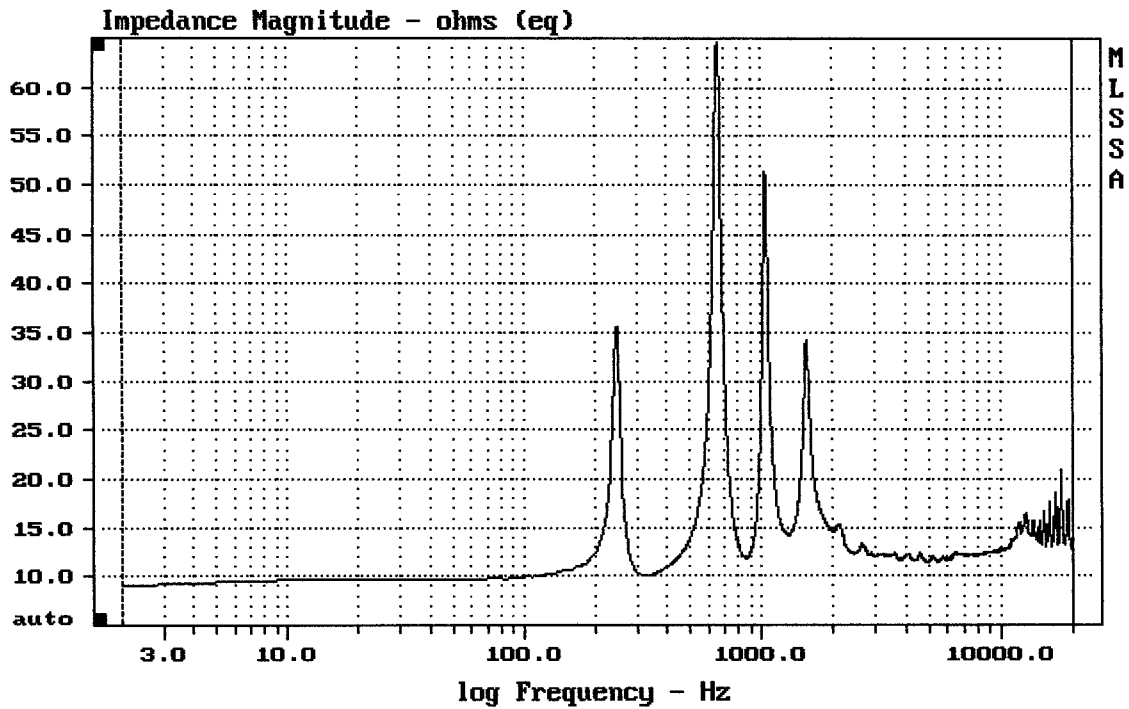


1.4" + HORN QSC WL3082

MLSSA: Frequency Domain

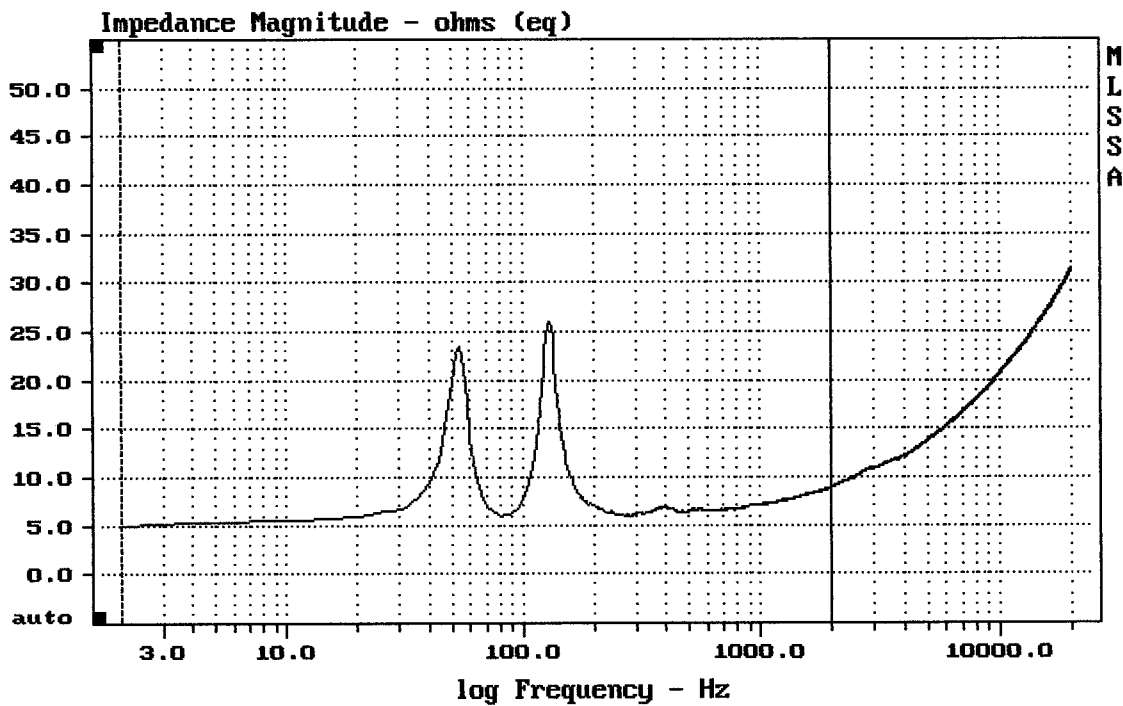

2x 8" QSC WL3082

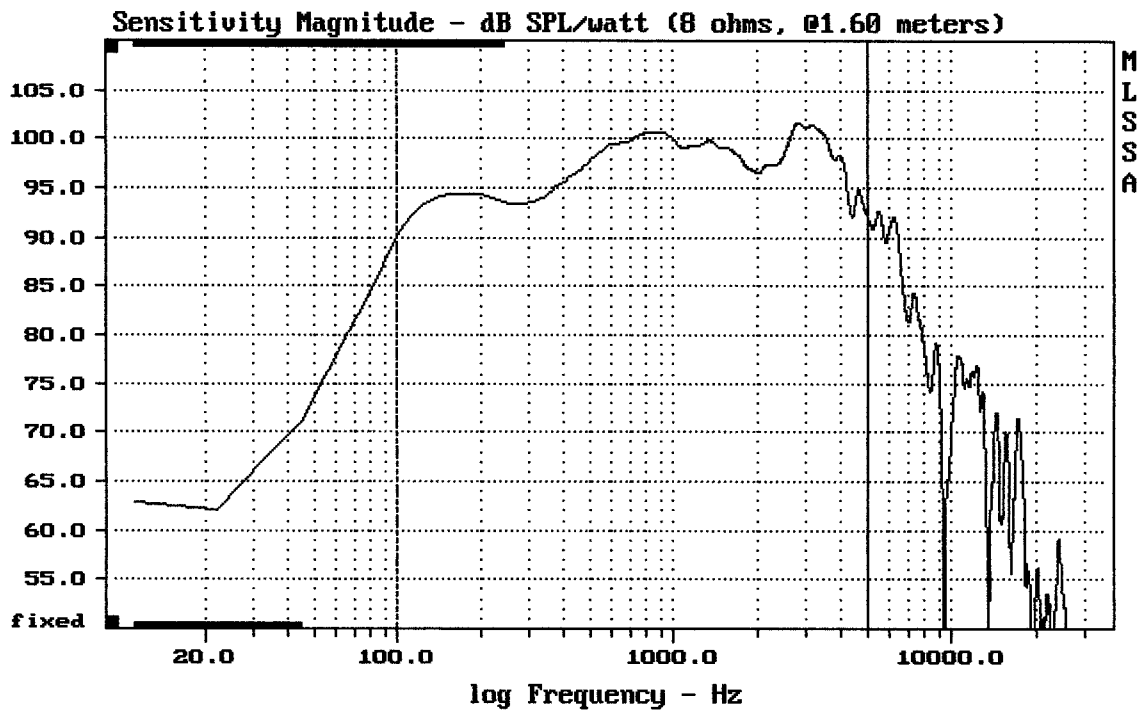


---

Level (100:5005 Hz) = 97.75 dB SPL/watt (8 ohms, @1.60 meters)


---

2x 8" QSC WL3082

MLSSA: Frequency Domain

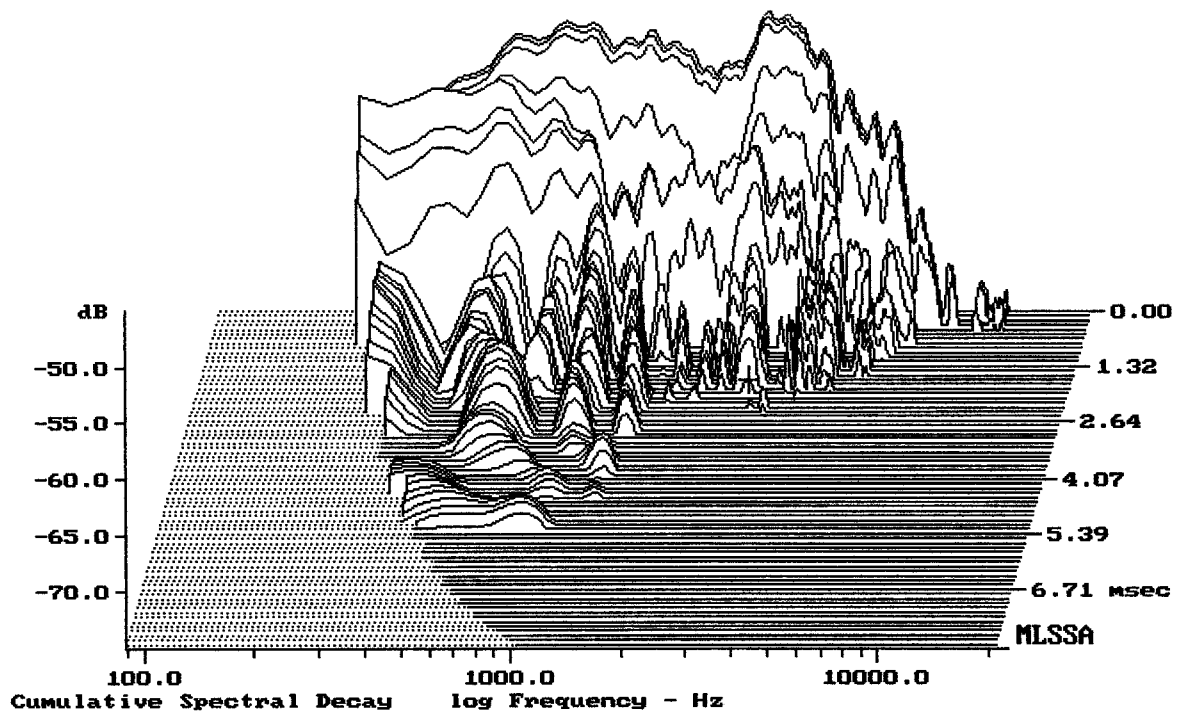


-73.72 dB, 2841 Hz (64), 1.980 msec (19)

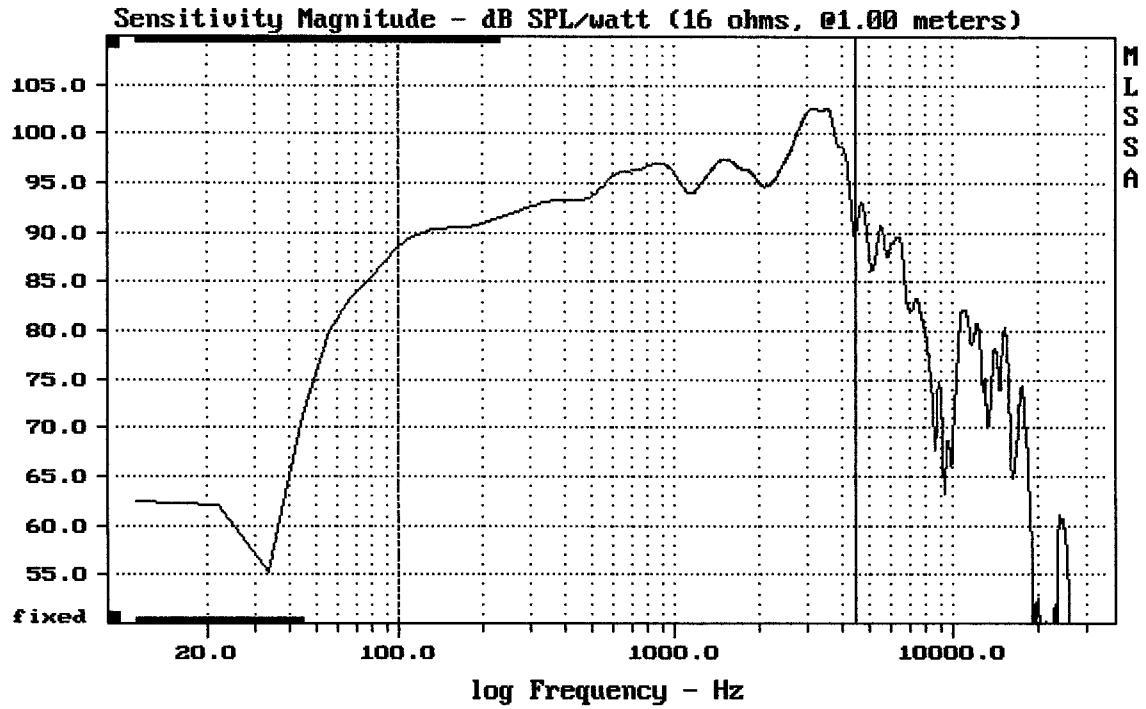

Level (100:4506 Hz) = 96.00 dB SPL/watt (16 ohms, @1.00 meters)

8" EMINENCE Nd FROM QSC WL3082

MLSSA: Frequency Domain

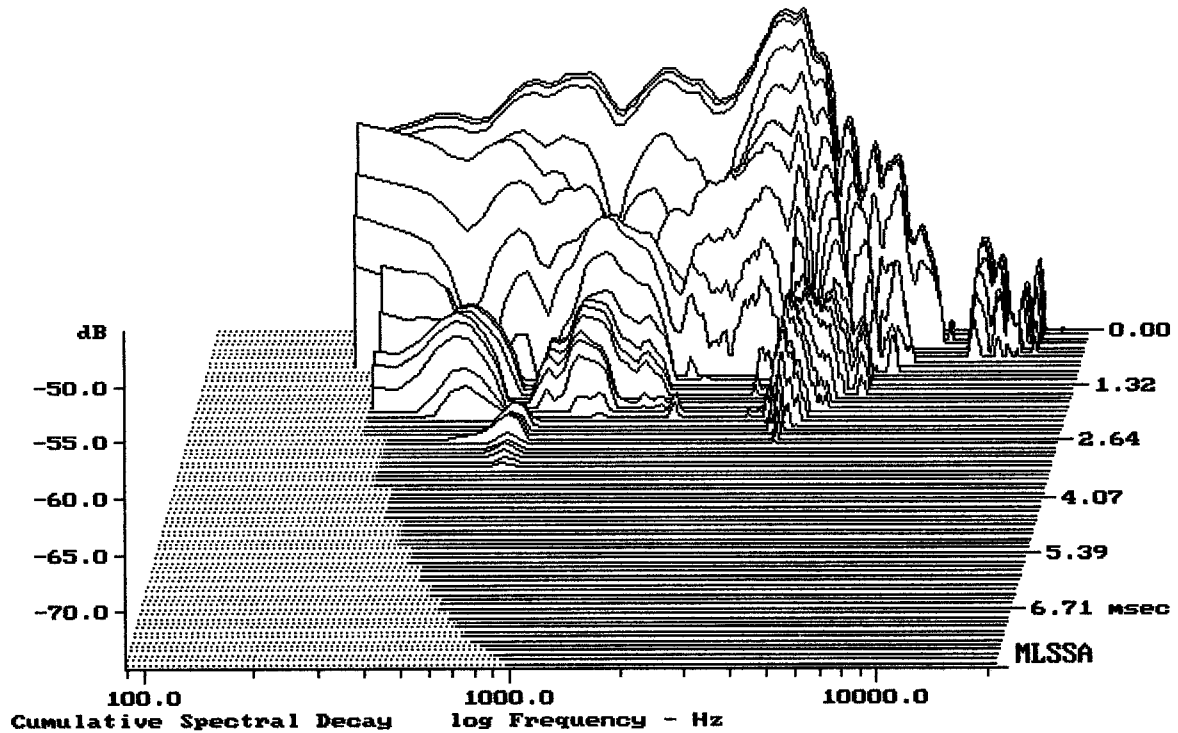

-73.47 dB, 3551 Hz (80), 2.640 msec (25)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.59	Ohms
2	Fs	89.79	Hz
3	Re	9.92	Ohms[dc]
4	Res	78.69	Ohms
5	Qms	5.30	
6	Qes	0.67	
7	Qts	0.59	
8	L1	0.54	mH
9	L2	1.09	mH
10	R2	5.59	Ohms
11	RMSE-load	0.65	Ohms
12	Vas(Sd)	10.89	liters
13	Mms	18.53	grams
14	Cms	170	$\mu\text{M}/\text{Newton}$
15	B1	12.46	Tesla-M
16	SPLref(Sd)	92.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 213.82 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -38.2% (-20% to -50% is recommended).

8" EMINENCE Nd FROM QSC WL3082

MLSSA: Parameters

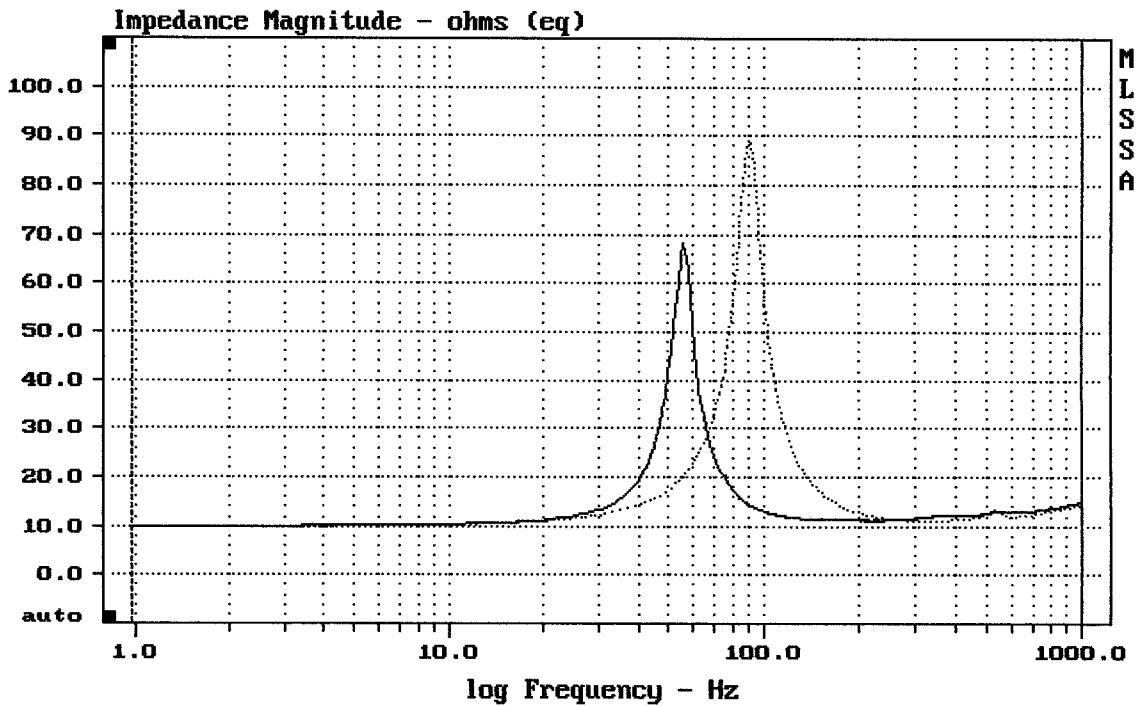

mean: 15.11, rms: 18.31, std: 10.34, max: 88.93, min: 9.999

MLSSA: Frequency Domain