



**MILAN s.r.l.**

**Legal headquarter**

**Head Office - Export Office:**

20090 Cesano Boscone (MI) - Italia

Via Mascagni, 4

Tel. +39 02 90394556

Fax. +39 02 90394551

www.taskercables.com

**Sales office and distribution center:**

20090 Cusago - Milano - Italia

Viale Europa, 72 Str.F/12


Tel. +39 02 90 39 00 37

Fax. +39 02 90 39 00 49

www.tasker.it

#### Technical form:

**C264** Multipair cable with separately shielded and insulated pairs

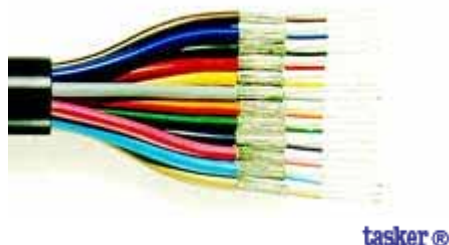

#### Technical characteristics:

Cond Number Nominal Section	<b>12 x 2 x 0,08 mm<sup>2</sup></b>
Formation	<b>12 x 0,10</b>
External Dimension (mm)	<b>15,0</b>
External core (mm)	<b>0,9</b>
Conductor Resistance Ohm/Km $\pm 5\%$	<b>210</b>
Operative Temperature (°C)	<b>-15° / +70°</b>
Capacity (pF/mt) core/core	<b>120</b>
Capacity (pF/mt) core/shield	<b>200</b>
Max operative Voltage V	<b>AC 49V</b>
Spool or Reel	<b>50</b>
Spool kind	<b>B10</b>
Weight Kg	<b>14,0</b>

#### Description:

Multipair cable with separately shielded and insulated pairs

100% spiral shields - Tinned copper

Conductors in tinned copper

Conductor insulation in PVC

Pair colours: white-brown, white-blue, white-black, white-red, white-yellow, white-grey, white-orange, white-green, white-violet, white-pink, white-light blue, white-light brown

Shield insulation in PVC

Sheath in PVC colour: black

#### Flexible cable for sound reproduction or electronics

#### Available colours:

■ Black